



■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery polarity protection by fuse
- Can be installed on DIN rail TS-35/7.5 or 15
- Alarm signal for AC OK and Battery low
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty


■ Applications

- Security system
- Emergency lighting system
- Alarm system
- UPS system
- Central monitoring system
- Access systems

■ Description

DRC-40 series is a 40W AC/DC DIN Rail type security power supply, allowing a universal input range between 90VAC and 264VAC . In addition to the primary output, there is a charger output, with the smaller rated current, that provides the backup power supply application the security access systems require. With the efficiency DRC-40 is up to 87% ; it can operate with air convection under -30°C through 70°C.

■ Model Encoding

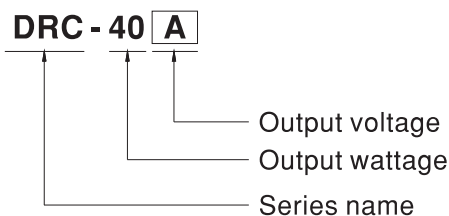





SPECIFICATION

| MODEL | | DRC-40A | | DRC-40B | |
|-----------------------|------------------------------|---|--------------------------|---------------------------------|-------|
| OUTPUT | OUTPUT NUMBER | CH1 | CH2 | CH1 | CH2 |
| | DC VOLTAGE | 13.8V | 13.8V | 27.6V | 27.6V |
| | RATED CURRENT | 1.9A | 1A | 0.95A | 0.5A |
| | CURRENT RANGE | 0 ~ 2.9A | ----- | 0 ~ 1.45A | ----- |
| | RATED POWER | 40.02W | | 40.02W | |
| | RIPPLE & NOISE (max.) Note.2 | 120mVp-p | | 200mVp-p | |
| | VOLTAGE ADJ. RANGE | CH1: 12 ~ 15V | | CH1: 24 ~ 30V | |
| | VOLTAGE TOLERANCE Note.3 | ± 1.0% | ----- | ± 1.0% | ----- |
| | LINE REGULATION | ± 0.5% | ----- | ± 0.5% | ----- |
| | LOAD REGULATION | ± 0.5% | ----- | ± 0.5% | ----- |
| | SETUP, RISE TIME Note.4 | 400ms, 50ms/230VAC | | 800ms, 50ms/115VAC at full load | |
| HOLD UP TIME (Typ.) | 50ms/230VAC | | 10ms/115VAC at full load | | |
| INPUT | VOLTAGE RANGE | 90 ~ 264VAC 127 ~ 370VDC [DC input operation possible by connecting AC/L(+), AC/N(-)] | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | |
| | EFFICIENCY (Typ.) | 86% | | 87% | |
| | AC CURRENT (Typ.) | 0.8A/115VAC 0.6A/230VAC | | | |
| | INRUSH CURRENT (Typ.) | COLD START 30A/115VAC | | 60A/230VAC | |
| PROTECTION | OVERLOAD | 105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | |
| | OVER VOLTAGE | CH1:14.49 ~ 18.63V | | CH1:28.98 ~ 37.26V | |
| | BATTERY CUT OFF | 10.5±0.5V | | 21±1V | |
| FUNCTION | AC OK | TTL open collector output, ON : AC OK ; OFF : AC Fail ; Ice : max. 30mA @50VDC | | | |
| | BATTERY LOW | TTL open collector output, ON : Battery Low ; OFF Battery OK ; Ice : max. 30mA @50VDC | | Battery low voltage : < 22V | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 55°C) on CH1 output | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes | | | |
| SAFETY & EMC (Note 5) | SAFETY STANDARDS | UL60950-1, TUV EN60950-1 approved | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | |
| | EMC EMISSION | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3 | | | |
| OTHERS | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61204-3, light industry level, criteria A | | | |
| | MTBF | 447.4K hrs min. MIL-HDBK-217F (25°C) | | | |
| | DIMENSION | 40*90*100mm (W*H*D) | | | |
| NOTE | PACKING | 0.3Kg; 42pcs/13.6Kg/0.82CUFT | | | |
| | | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. | | | |


■ **Block Diagram**

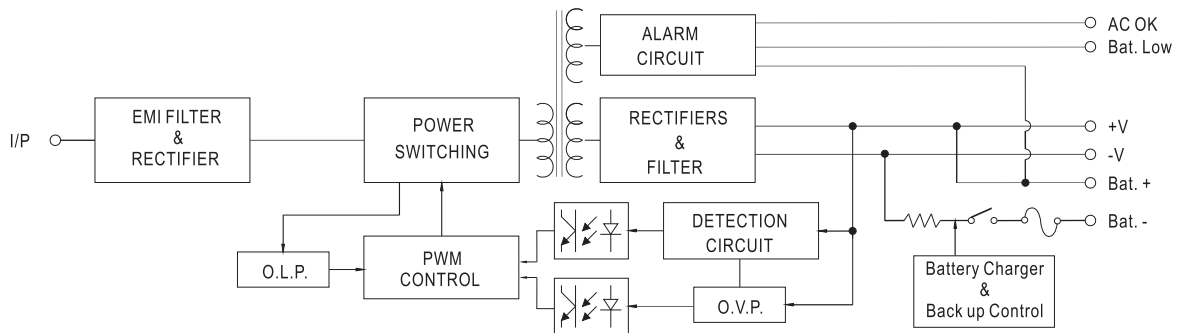

■ **Derating Curve**

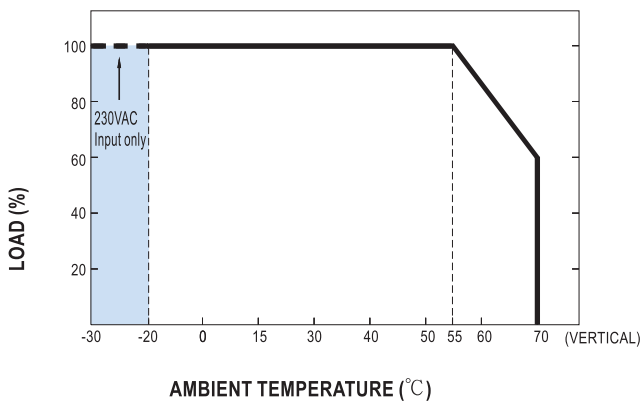

■ **Static Characteristics**

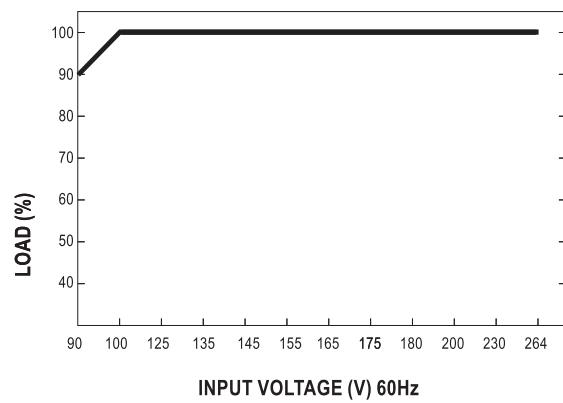

■ **Suggested Application**

1. Back up connection for AC interruption

(1) Please refer to the Fig1.1 for suggested connection.

The power supply charge the battery and provide energy to the load in the same time when the AC main is OK.

The battery start to supply power to the load when the AC main fails.

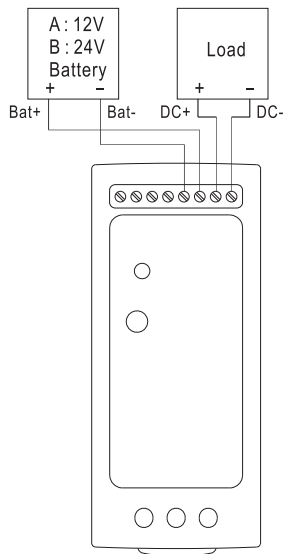


Fig 1.1 Suggested system connection

2. Alarm signal for AC OK and battery low

- (1) Alarm Signal is sent out through "AC OK" & "Battery Low" pins.
- (2) An external voltage source is required for this function. The maximum applied voltage is 50V and the maximum sink current is 30mA.
- (3) Table 2.1 explain the alarm function built-in the power supply

| Function | Description | Output of alarm |
|-------------|--|---|
| AC OK | The signal is "Low" when the power supply turns on | Low (0.3V max. at 30mA) |
| | The signal turns to be "High" when the power supply turns OFF | High or open(External applied voltage 50V max.) |
| Battery Low | The signal is "Low" when the voltage of battery is under A:11V, B:22V | Low (0.3V max. at 30mA) |
| | The signal is "High" when the voltage of battery is above A:11V, B:22V | High or open(External applied voltage 50V max.) |

Table 2.1 Explanation of Alarm Signal

AC OK (Battery low)


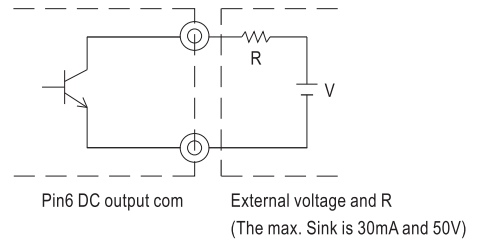


Fig 2.2 Internal circuit of AC OK (Battery Low)

■ Mechanical Specification

Case No.962A Unit:mm

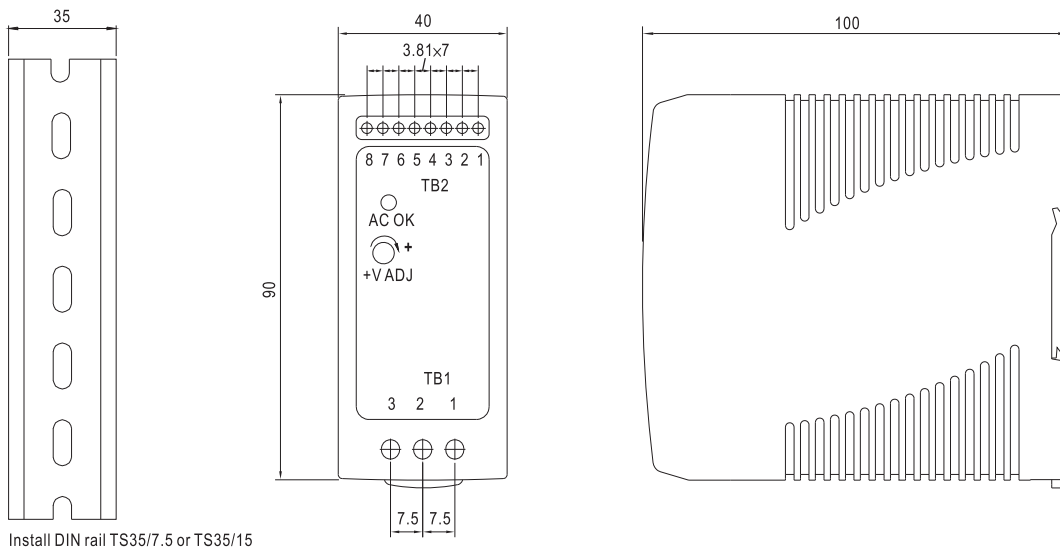

Install DIN rail TS35/7.5 or TS35/15

Terminal Pin No. Assignment (TB1):

| Pin No. | Assignment |
|---------|-------------|
| 1 | AC/L or DC+ |
| 2 | AC/N or DC- |
| 3 | FG ≡ |

Terminal Pin No. Assignment (TB2):

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|------------|
| 1 | -V | 4 | Bat. - |
| 2 | +V | 5,6 | AC OK |
| 3 | Bat. + | 7,8 | Bat. Low |

■ Installation Manual

Please refer to : <http://www.meanwell.com/webnet/search/InstallationSearch.html>