



**POWER MATE
TECHNOLOGY CO.,LTD.**



QEB75-SERIES

Single output

1 / 4

FEATURES

- 75 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 25A
- COMPACT 2.28 X 1.45 X 0.50 INCH PACKAGE
- HIGH EFFICIENCY UP TO 90%
- 2:1 WIDE INPUT VOLTAGE RANGE
- FIXED SWITCHING FREQUENCY
- INDUSTRY STANDARD FOOTPRINT
- NO MINIMUM LOAD
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- INPUT TO OUTPUT ISOLATION (BASIC INSULATION)
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment

OPTIONS

Positive logic Remote on/off, Pin length

DESCRIPTION

QEB75 single output DC/DC converters provide up to 75 watts of output power in an industry standard quarter-brick package and footprint. These units are specifically designed to meet the power needs of low-voltage silicon. All models feature a wide input range, trimmable output voltage and a 25A current rating.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power	75 Watts max.	
Voltage accuracy	Full load and Normal Vin	± 1.5%
Minimum load		0%
Voltage adjustability (Note 5)		+ 10% , -20%
Line regulation	LL to HL at Full Load	±0.2%
Load regulation	No load to Full Load	See table
Remote Sense (Note 5)		10% of Vout
Ripple and noise	20MHz bandwidth (Measured with a 1µFMC and a 10µFT/C)	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µS
Over voltage Protection threshold (Non-latching Hiccup)		120% Vout max.
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short circuit protection		Hiccup, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency	See table	
Isolation voltage	Input to Output Input to Case Output to Case	1600VDC,min. 1000VDC,min. 1000VDC,min.
Isolation resistance		10 ⁷ ohms, min.
Isolation capacitance		2500 pF, max.
Switching frequency		270 KHz, typ.
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1	
Case material	Aluminum base plate	
Weight (approx)	42g (1.46 oz)	
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	2.500 x 10 ⁶ hrs 4.422 x 10 ⁵ hrs

INPUT SPECIFICATIONS			
Input voltage range	24V nominal input 48V nominal input	18 – 36VDC 36 – 75VDC	
Input filter		L-C type	
Input surge voltage	100mS max	24V nominal input 48V nominal input	50VDC 100VDC
Start up time	Nominal Vin and constant resistive load	Power up Remote ON/OFF	25mS typ. 25mS typ.
Start-up voltage	24V nominal input 48V nominal input		17VDC 34VDC
Shutdown voltage	24V nominal input 48V nominal input		15VDC 32VDC
Remote ON/OFF (Note 6)			
Negative logic(Standard)	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3V < Vr < 15V	
Positive logic(Option)	DC-DC ON DC-DC OFF	Open or 3V < Vr < 15V Short or 0V < Vr < 1.2V	
Input current of remote control pin	Nominal Vin		-0.5~1.0mA
Remote off state input current	Nominal Vin		2.5mA

ENVIRONMENTAL SPECIFICATIONS			
Operating base-plate temperature range (Note 7)		-40°C to +100°C (with derating)	
Over temperature protection		110°C, max.	
Storage temperature range		-55°C to +125°C	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Humidity , Max. , Non-Condensing			95%

EMC CHARACTERISTICS		
EMI (Note 8)	EN55022	Class A
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transient (Note 9)	EN61000-4-4	± 2KV Perf. Criteria B
Surge (Note 9)	EN61000-4-5	± 1KV Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A



**POWER MATE
TECHNOLOGY CO.,LTD.**

**75WATTS SINGLE OUTPUT
DC-DC CONVERTER**

2 / 4

Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Load regulation
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
QEB75-24S3P3	18 – 36 VDC	3.3 VDC	0mA	20A	100mVp-p	80mA	3198mA	89	10mV
QEB75-24S05	18 – 36 VDC	5 VDC	0mA	15A	100mVp-p	130mA	3634mA	90	15mV
QEB75-24S12	18 – 36 VDC	12 VDC	0mA	6.25A	100mVp-p	190mA	3662mA	90	36mV
QEB75-24S15	18 – 36 VDC	15 VDC	0mA	5A	100mVp-p	190mA	3634mA	90	45mV
QEB75-48S1P8	36 – 75 VDC	1.8 VDC	0mA	25A	100mVp-p	50mA	1157mA	85	5.4mV
QEB75-48S2P5	36 – 75 VDC	2.5 VDC	0mA	25A	100mVp-p	50mA	1569mA	87	7.5mV
QEB75-48S3P3	36 – 75 VDC	3.3 VDC	0mA	20A	100mVp-p	70mA	1599mA	90	10mV
QEB75-48S05	36 – 75 VDC	5 VDC	0mA	15A	100mVp-p	80mA	1817mA	90	15mV
QEB75-48S12	36 – 75 VDC	12 VDC	0mA	6.25A	100mVp-p	130mA	1831mA	90	36mV
QEB75-48S15	36 – 75 VDC	15 VDC	0mA	5A	100mVp-p	130mA	1817mA	90	45mV

Note :


- 1.BELLCORE TR-NWT-000332. Case 1: 80% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- 2.Maximum value at nominal input voltage and full load of standard type.
- 3.Typical value at nominal input voltage and no load.
- 4.Typical value at nominal input voltage and full load.
- 5.Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the + sense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.
- 6.The positive logic and pin length are optional (see table). The pin voltage is referenced to -Vin.
- 7.Heat sink is optional and P/N : 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, 7G-0032A-F.
- 8.The QEB75 meets EN55022 class A and class B only with external components connected before the input pin to the converter.
- 9.An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μ F/100V, ESR 48m Ω .
- 10.BASEPLATE GROUNDING : Base-plate should be grounded at one of the four screw bolts prior to operation.
- 11.The converter is provided by basic insulation.



**POWER MATE
TECHNOLOGY CO.,LTD.**

75WATTS SINGLE OUTPUT DC-DC CONVERTER

3 / 4

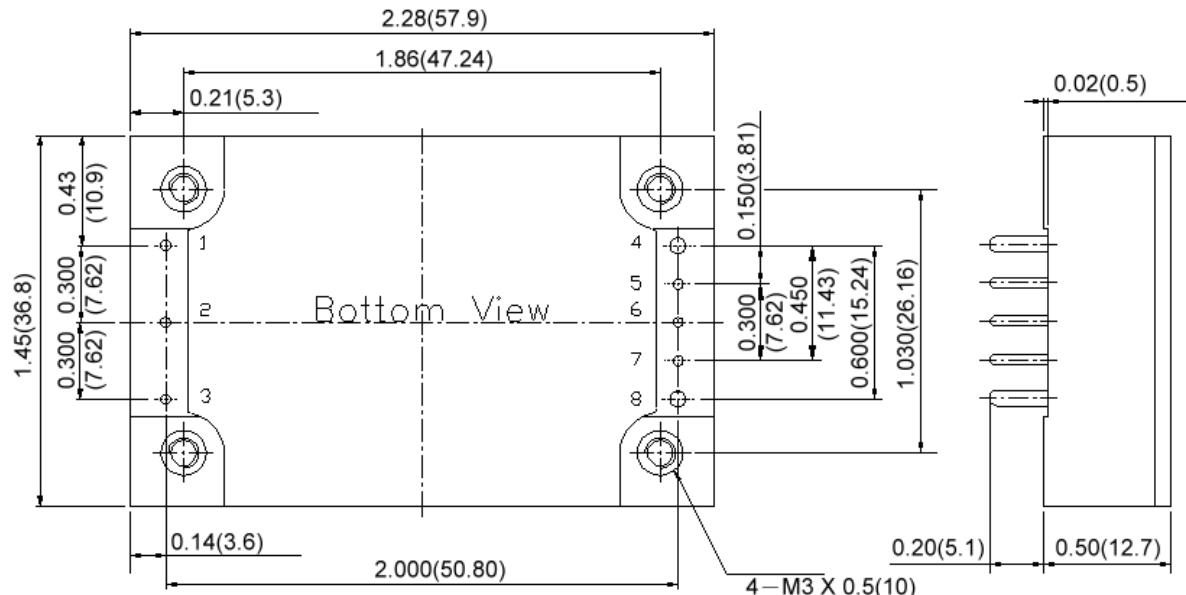

EXTERNAL OUTPUT TRIMMING	
TRIM UP	TRIM DOWN
7 → R _U	6 → R _D

PIN CONNECTION	
PIN	Define
1	- INPUT
2	ON/OFF
3	+ INPUT
4	- OUTPUT
5	- SENSE
6	TRIM
7	+ SENSE
8	+ OUTPUT

PRODUCT OPTIONS TABLE	
Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M

Example : QEB75-48S3P3-P








**POWER MATE
TECHNOLOGY CO.,LTD.**

75WATTS SINGLE OUTPUT DC-DC CONVERTER

VER:11

4 / 4

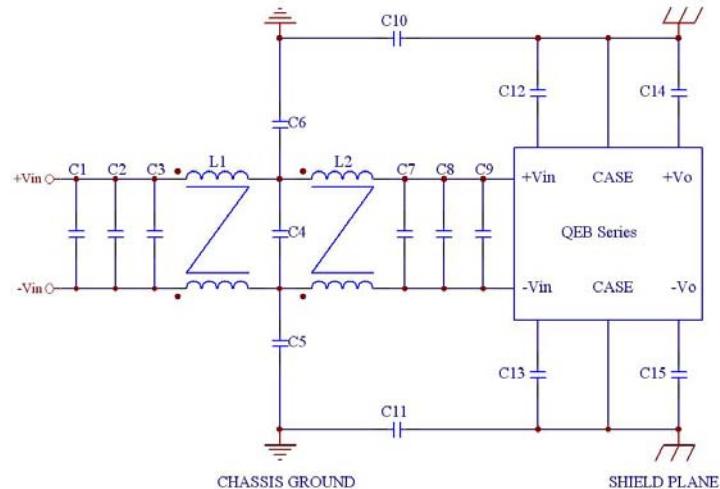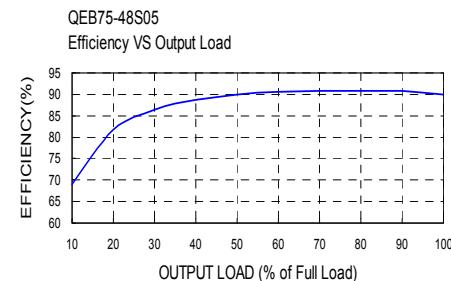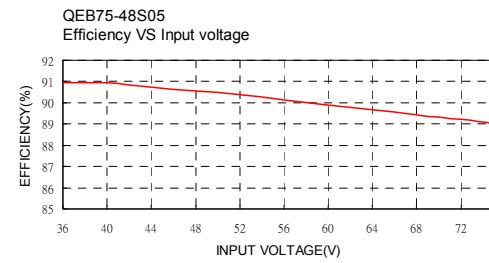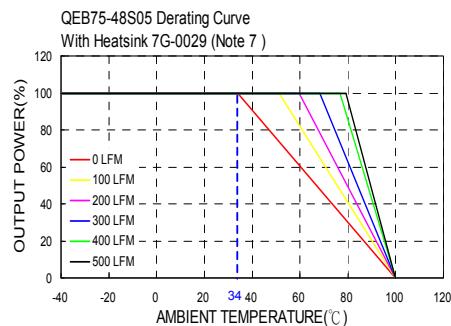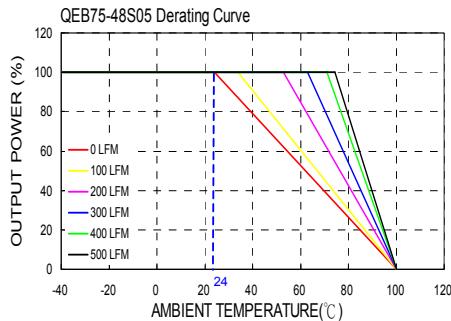


Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	C5
QEB75-24Sxx	6.8μF/50V	6.8μF/50V	6.8μF/50V	6.8μF/50V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	6.8μF/50V	6.8μF/50V	6.8μF/50V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
	L1	L2			
	620μH	620μH			

	C1	C2	C3	C4	C5
QEB75-48Sxx	100μF/100V	1.5μF/100V	1.5μF/100V	1.5μF/100V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	47μF/100V	1.5μF/100V	1.5μF/100V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
	L1	L2			
	620μH	620μH			

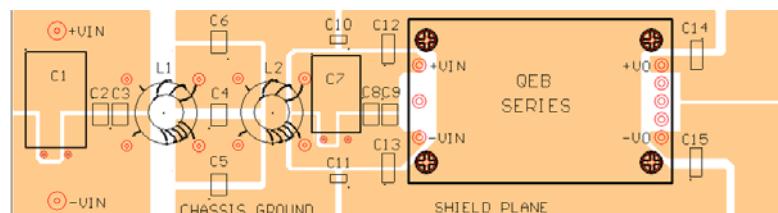

Recommended EN55022 Class B Filter Circuit Layout