


REVISIONS				
REV	DESCRIPTION	E.C.N.	DATE	BY/APP'D
D	REVISE & REDRAW PER NEW STANDARD	10404	05/19/1994	TL/GY
E	UPDATE MIL/AERO STAMPS	11000	06/19/1995	MS/GY
F	.187±.008 WAS .185±.002; .214±.005 WAS .212±.003; .041±.005 WAS .040±.005/-0.004; CHANGE DWG FORMAT TO B SIZE	676	04/18/2002	TL/CBS

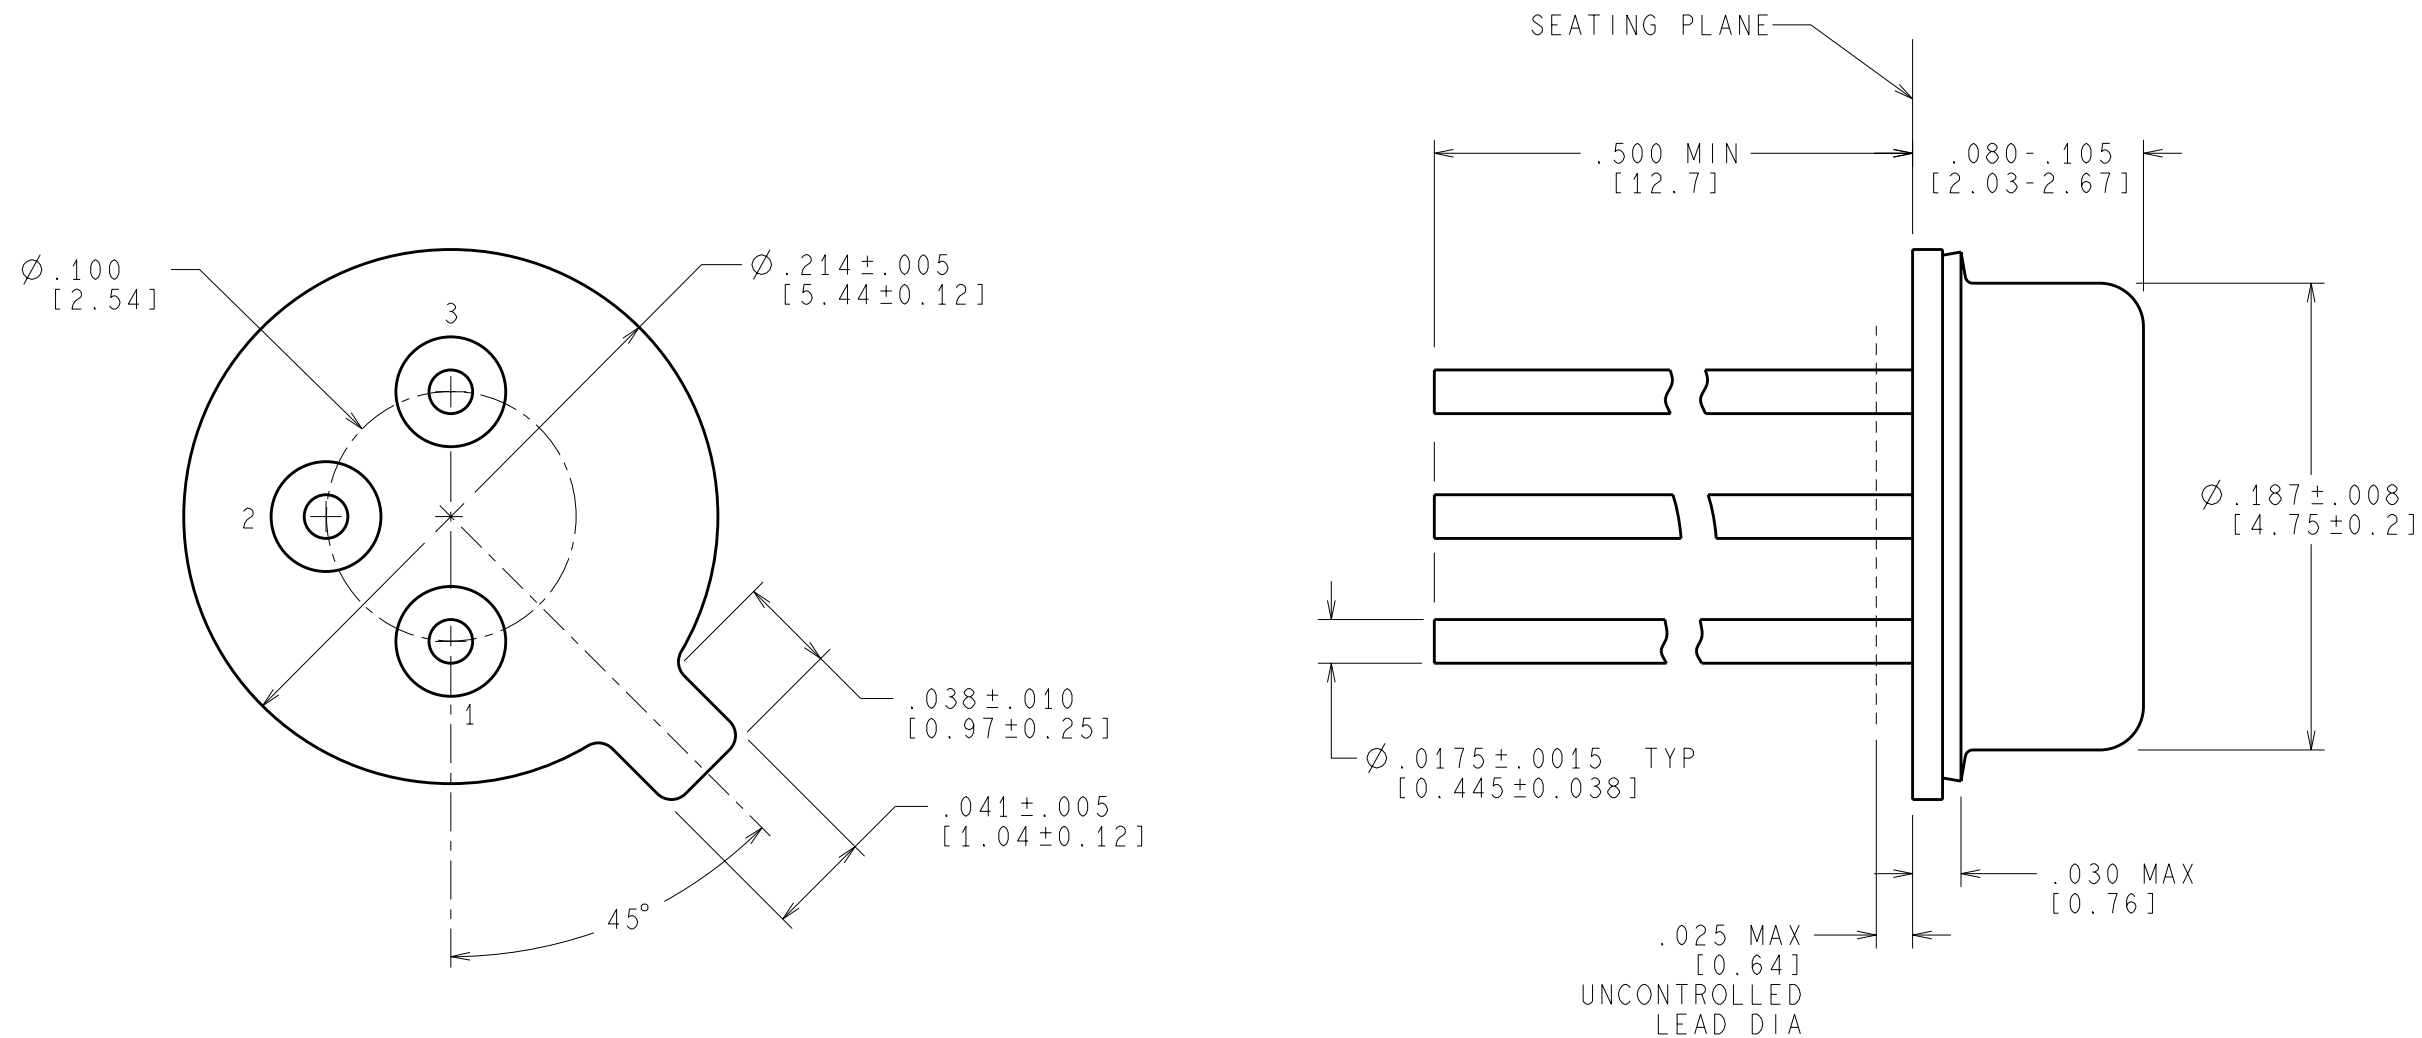

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE IN MILLIMETERS

NOTES: UNLESS OTHERWISE SPECIFIED

- LEADS TO BE LOCATED WITHIN .007 IN/ 0.18 mm OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM WIDTH TAB.
- STANDARD METAL CAN TYPE: SOLID BASE.
- APPLIES TO MIL-AERO AND LINEAR PRODUCTS.
- REFERENCE JEDEC REGISTRATION TO-46, JEDEC PUBLICATION No. 95.

MIL-PRF-38535  
CONFIGURATION CONTROL

APPROVALS	DATE	National Semiconductor		
DRAWN T. LEQUANG	05/19/1994	2900 Semiconductor Dr., Santa Clara, CA 95052-8090		
DFTG. CHK. MARTA SUCHY	04/18/2002	METAL CAN, TO-46, 3 LEAD, .100 DIA P.C.		
ENGR. CHK. ALVIN CB SIM	04/18/2002			
PROJECTION	SCALE	SIZE	DRAWING NUMBER	REV
	NTS	B	(SC)MKT-H03H	F
FORMERLY: N/A			SHEET 1 of 1	