

AT-42085

Up to 6 GHz Medium Power Silicon Bipolar Transistor



Data Sheet

Description


Avago's AT-42085 is a general purpose NPN bipolar transistor that offers excellent high frequency performance. The AT-42085 is housed in a low cost .085" diameter plastic package. The 4 micron emitter-to-emitter pitch enables this transistor to be used in many different functions. The 20 emitter finger interdigitated geometry yields a medium sized transistor with impedances that are easy to match for low noise and medium power applications. Applications include use in wireless systems as an LNA, gain stage, buffer, oscillator, and mixer. An optimum noise match near 50Ω up to 1 GHz, makes this device easy to use as a low noise amplifier.

The AT-42085 bipolar transistor is fabricated using Avago's 10 GHz f_T Self-Aligned-Transistor (SAT) process. The die is nitride passivated for surface protection. Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metalization in the fabrication of this device.

Features

- High Output Power:
20.5 dBm Typical $P_{1\text{ dB}}$ at 2.0 GHz
- High Gain at 1 dB Compression:
14.0 dB Typical $G_{1\text{ dB}}$ at 2.0 GHz
- Low Noise Figure:
2.0 dB Typical NF_0 at 2.0 GHz
- High Gain-Bandwidth Product: 8.0 GHz Typical f_T
- Low Cost Plastic Package
- Lead-free Option Available

85 Plastic Package



AT-42085 Absolute Maximum Ratings

| Symbol | Parameter | Units | Absolute Maximum ^[1] |
|------------------|------------------------------------|-------|---------------------------------|
| V _{EBO} | Emitter-Base Voltage | V | 1.5 |
| V _{CBO} | Collector-Base Voltage | V | 20 |
| V _{CEO} | Collector-Emitter Voltage | V | 12 |
| I _C | Collector Current | mA | 80 |
| P _T | Power Dissipation ^[2,3] | mW | 500 |
| T _j | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to 150 |

Thermal Resistance^[2,4]:

$$\theta_{jc} = 130^{\circ}\text{C}/\text{W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T_{CASE} = 25°C.
3. Derate at 7.7 mW/°C for T_C > 85°C.
4. See MEASUREMENTS section "Thermal Resistance" for more information.

Electrical Specifications, T_A = 25°C

| Symbol | Parameters and Test Conditions | Units | Min. | Typ. | Max. |
|---------------------------------|---|---|------|------|---------------------|
| S _{21E} ² | Insertion Power Gain; V _{CE} = 8 V, I _C = 35 mA | f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz | dB | 15.5 | 17.0 11.0 5.0 |
| P _{1dB} | Power Output @ 1 dB Gain Compression V _{CE} = 8 V, I _C = 35 mA | f = 2.0 GHz f = 4.0 GHz | dBm | | 20.5 20.0 |
| G _{1dB} | 1 dB Compressed Gain; V _{CE} = 8 V, I _C = 35 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 14.0 9.5 |
| NF _O | Optimum Noise Figure; V _{CE} = 8 V, I _C = 10 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 2.0 3.5 |
| G _A | Gain @ NF _O ; V _{CE} = 8 V, I _C = 10 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 13.5 9.5 |
| f _T | Gain Bandwidth Product; V _{CE} = 8 V, I _C = 35 mA | | GHz | | 8.0 |
| h _{FE} | Forward Current Transfer Ratio; V _{CE} = 8 V, I _C = 35 mA | | — | 30 | 150 270 |
| I _{CBO} | Collector Cutoff Current; V _{CB} = 8 V | | μA | | 0.2 |
| I _{EBO} | Emitter Cutoff Current; V _{EB} = 1 V | | μA | | 2.0 |
| C _{CB} | Collector Base Capacitance ^[1] ; V _{CB} = 8 V, f = 1 MHz | | pF | | 0.32 |

Note:

1. For this test, the emitter is grounded.

AT-42085 Typical Performance, $T_A = 25^\circ\text{C}$

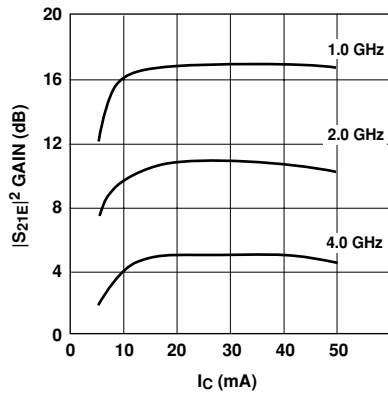


Figure 1. Insertion Power Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

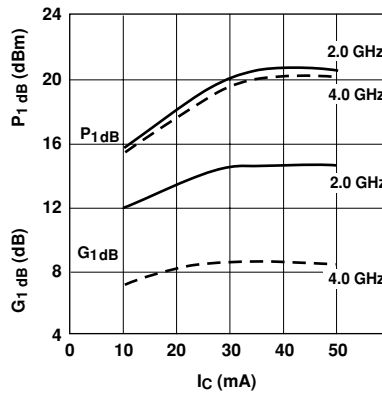


Figure 2. Output Power and 1 dB Compressed Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

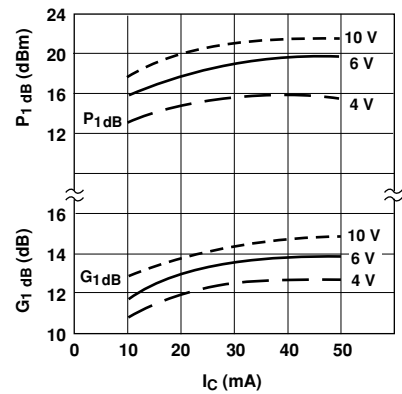


Figure 3. Output Power and 1 dB Compressed Gain vs. Collector Current and Voltage. $f = 2.0\text{ GHz}$.

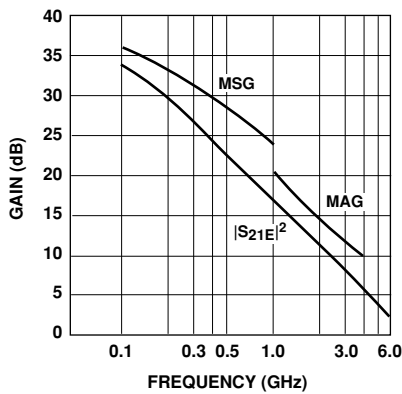


Figure 4. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 35\text{ mA}$.

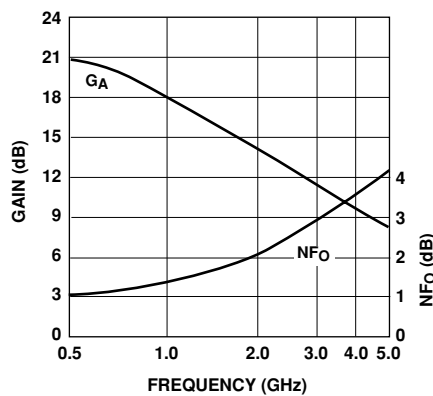


Figure 5. Noise Figure and Associated Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$.

AT-42085 Typical Scattering Parameters,Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8 \text{ V}$, $I_C = 10 \text{ mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | dB | S_{12} | | S_{22} | |
|--------------|----------|------|------|----------|------|-------|----------|------|----------|------|
| | Mag. | Ang. | | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. |
| 0.1 | .72 | -50 | 28.5 | 26.52 | 152 | -37.0 | .014 | 73 | .90 | -16 |
| 0.5 | .66 | -139 | 21.0 | 11.23 | 103 | -29.2 | .035 | 36 | .53 | -32 |
| 1.0 | .65 | -168 | 15.5 | 5.96 | 84 | -28.6 | .037 | 39 | .45 | -33 |
| 1.5 | .65 | 175 | 12.2 | 4.06 | 71 | -27.0 | .045 | 46 | .43 | -36 |
| 2.0 | .65 | 163 | 9.7 | 3.06 | 60 | -25.3 | .054 | 51 | .42 | -41 |
| 2.5 | .66 | 157 | 8.0 | 2.51 | 55 | -24.0 | .063 | 60 | .42 | -42 |
| 3.0 | .68 | 149 | 6.3 | 2.07 | 46 | -22.8 | .072 | 65 | .41 | -48 |
| 3.5 | .68 | 141 | 5.1 | 1.79 | 38 | -21.4 | .085 | 64 | .43 | -55 |
| 4.0 | .69 | 133 | 3.9 | 1.57 | 29 | -19.7 | .104 | 64 | .45 | -61 |
| 4.5 | .69 | 125 | 3.0 | 1.41 | 21 | -18.5 | .119 | 63 | .46 | -66 |
| 5.0 | .69 | 114 | 2.2 | 1.28 | 12 | -17.1 | .139 | 58 | .47 | -71 |
| 5.5 | .71 | 103 | 1.4 | 1.17 | 3 | -15.9 | .161 | 55 | .44 | -76 |
| 6.0 | .75 | 91 | 0.6 | 1.07 | -6 | -15.1 | .177 | 49 | .40 | -85 |

AT-42085 Typical Scattering Parameters,Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8 \text{ V}$, $I_C = 35 \text{ mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | dB | S_{12} | | S_{22} | |
|--------------|----------|------|------|----------|------|-------|----------|------|----------|------|
| | Mag. | Ang. | | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. |
| 0.1 | .54 | -90 | 33.1 | 45.38 | 137 | -40.1 | .010 | 66 | .76 | -26 |
| 0.5 | .61 | -163 | 22.6 | 13.45 | 95 | -32.8 | .023 | 52 | .38 | -30 |
| 1.0 | .61 | 178 | 16.8 | 6.90 | 79 | -29.5 | .034 | 61 | .34 | -28 |
| 1.5 | .62 | 167 | 13.4 | 4.67 | 68 | -26.4 | .048 | 68 | .32 | -31 |
| 2.0 | .63 | 156 | 10.9 | 3.52 | 59 | -23.9 | .064 | 66 | .31 | -36 |
| 2.5 | .64 | 152 | 9.2 | 2.89 | 54 | -22.5 | .075 | 68 | .31 | -40 |
| 3.0 | .66 | 146 | 7.6 | 2.39 | 45 | -21.2 | .088 | 69 | .30 | -48 |
| 3.5 | .67 | 139 | 6.3 | 2.07 | 37 | -19.8 | .102 | 67 | .31 | -58 |
| 4.0 | .68 | 131 | 5.2 | 1.81 | 28 | -18.6 | .117 | 65 | .33 | -67 |
| 4.5 | .68 | 123 | 4.2 | 1.62 | 19 | -17.2 | .138 | 60 | .35 | -73 |
| 5.0 | .68 | 114 | 3.4 | 1.48 | 10 | -16.4 | .152 | 56 | .35 | -79 |
| 5.5 | .71 | 103 | 2.5 | 1.34 | 1 | -15.3 | .171 | 50 | .34 | -85 |
| 6.0 | .74 | 93 | 1.7 | 1.21 | -8 | -14.5 | .188 | 46 | .31 | -96 |

A model for this device is available in the DEVICE MODELS section.

AT-42085 Noise Parameters: $V_{CE} = 8 \text{ V}$, $I_C = 10 \text{ mA}$


| Freq. GHz | N_{F0} dB | Γ_{opt} | | $R_N/50$ |
|--------------|----------------|----------------|------|----------|
| | | Mag | Ang | |
| 0.1 | 1.1 | .05 | 16 | 0.13 |
| 0.5 | 1.2 | .06 | 77 | 0.13 |
| 1.0 | 1.3 | .10 | 131 | 0.12 |
| 2.0 | 2.0 | .24 | -179 | 0.11 |
| 4.0 | 3.5 | .46 | -128 | 0.25 |

Ordering Information

| Part Numbers | No. of Devices |
|--------------|----------------|
| AT-42085 | 10 |
| AT-42085G | 10 |

Note: Order part number with a “G” suffix if lead-free option is desired.

85 Plastic Package Dimensions

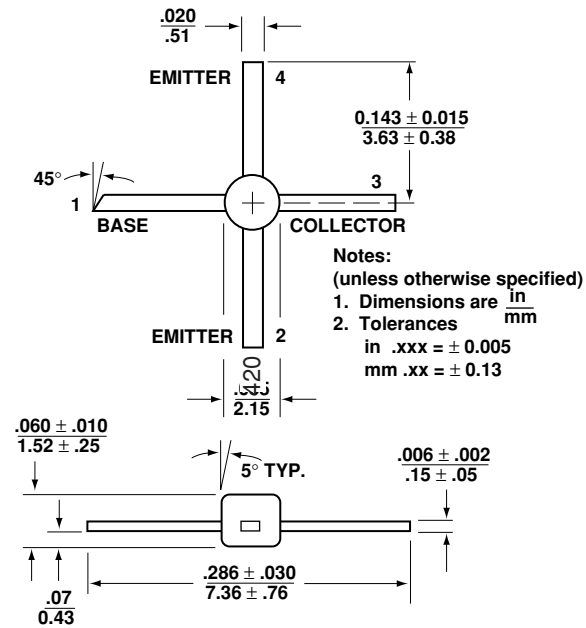

For product information and a complete list of distributors, please go to our web site:
www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries.

Data subject to change. Copyright © 2006 Avago Technologies, Limited. All rights reserved.
 Obsoletes 5965-8913EN
 5989-2655EN August 22, 2006