



- Standard Industry Footprint (DOSA)
- 3.0-5.5V and 6.0-14.0V Input
- 0.8-5.0V Nominal Outputs
- Surface Mount
- Low 8.5mm Profile
- Non Isolated Output

iAA/iAC Series

15 to 16A

Point of Load Converter

iAA / iAC Features and Benefits

Features

- High operating efficiency (up to 95%)
- Constant switching frequency
- Starts with pre-biased output

Benefits

- Reduced system heating
- Easier system filtering
- Supports complex digital systems

Specifications

MODEL		iAA05015A008V	iAA05015A025V	iAA05015A033V	iAC12016A008V
ITEMS					
Nominal Output Voltage	VDC	0.75-3.63	2.5	3.3	0.8 - 5.0
Input Voltage Range	VDC	3.0-5.5 (2)	3.0-5.5 (2)	4.5-5.5	6.0 ⁽¹⁾ - 14
Input Current (max)	A		16		18
Output Voltage Tolerance	VDC	±3.3% Vo, set	2.413 - 2.588	3.19 - 3.41	-2.5 to +3.5% Vo, set
Ripple & Noise (max) (pk to pk) (3)	mV		75		100
Line Regulation (max)	mV		5		10
Load Regulation (max)	mV		10		15
Overload Protection	%	Inception - 175-235% of rated output; Short circuit - auto recovery			
Overvoltage Protection	-	N/A			
Remote Sense	-	Yes			
Remote On / Off	-	Positive or Negative Logic available, see Feature Set			
Sequencing	-	Not Available			See Feature Set
Temperature (operating)	°C	-40 to 125			
Temperature (storage)	°C	-55 to 125			
Humidity (operating)	-	20-95% RH Non condensing			
Humidity (storage)	-	Per IPC / JEDEC J-STD-020, for MSL-2 (<30C/60%RH) in original packaging			
Cooling	-	Convection or forced air			
Isolation Voltage	-	N/A			
Vibration (non operating)	-	5 to 50Hz @ 0.5g (4.9m/s ²), and 50 to 500Hz @ 1.5g (14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4			
Shock	-	196.1m/s ²			
Safety Agency Approvals	-	UL60950 (US and Canada), VDE0805 (IEC60950), CB scheme (IEC60950)			
Weight (max)	g	12			
Size	mm	33 x 13.5 x 8.5			
Warranty	-	3 Years			

Notes: See website for detailed specifications

- (1) 8.3 - 14V when output is >3.63V
- (2) 4.5 - 5.5V when output is >3.0V
- (3) Measured across one 0.1uF ceramic capacitor and one 47uF ceramic capacitor; BW = 20MHz



Model Selector					
Model	Voltage Voltage (V)	Adjust Adjust (V)	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)
iAA05015A008V-001-R	0.75 - 3.63	0.75 - 3.63	15	49.5	94.5
iAA05015A025V-001-R	2.5	2.25 - 2.75	15	37.5	93
iAA05015A033V-001-R	3.3	2.97 - 3.63	15	49.5	95
iAC12016A008V-001-R	0.8 - 5.0	0.8 - 5.0	16	80	94 @ 5V

Feature Set					
	Feature Set	Pos. Logic On / Off	Neg. Logic On / Off	Input Voltage	Sequencing
iAA	00	X			
	01*		X		
iAC	00	X		6.0 - 14.0	X
	01*		X	6.0 - 14.0	X
	02	X		6.0 - 14.0	
	03		X	6.0 - 14.0	


* Preferred feature set
Model Number Example: iAC12016A008V-001-R

Pinout				
PIN	iAA	Function		
		iAC(Seq)	iAC(No Seq)	
1	Vin	On/Off	On/Off	
2	Gnd	Vin	Vin	
3	Vout	Seq	Gnd	
4	Trim	Gnd	Vout	
5	Sense	Vout	Trim	
6	On/Off	Trim	Sense	
7	-	Sense	-	


For full data and drawings please visit www.emea.tdk-lambda.com/www/iaa



Recommended Footprint (Top View) iAA/iAC (no sequence) Series

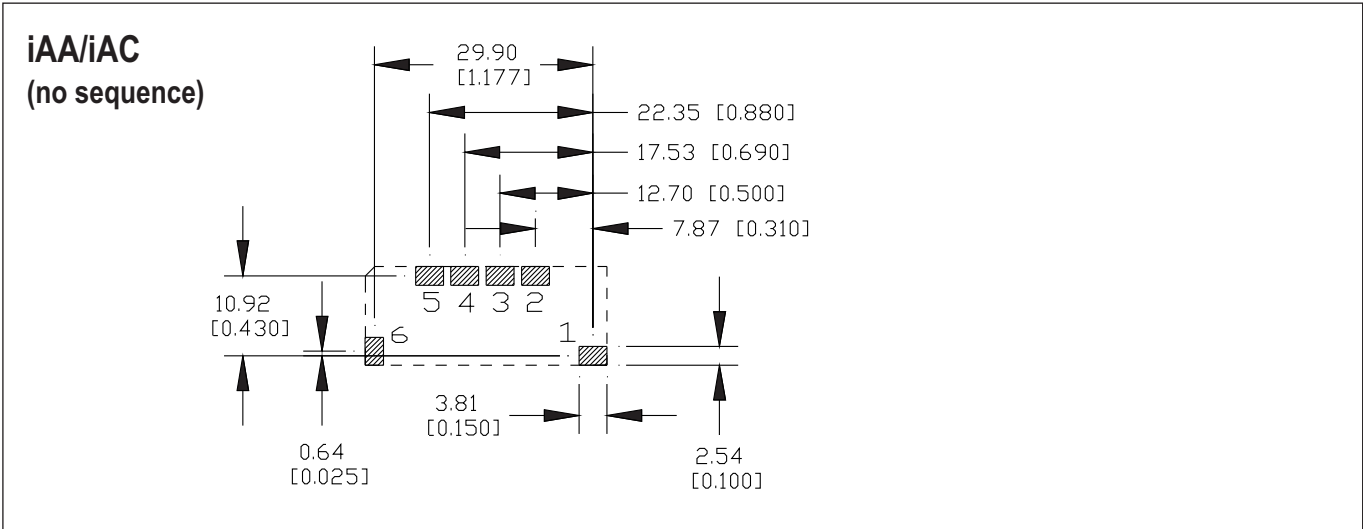

Recommended Footprint (Top View) iAC Series

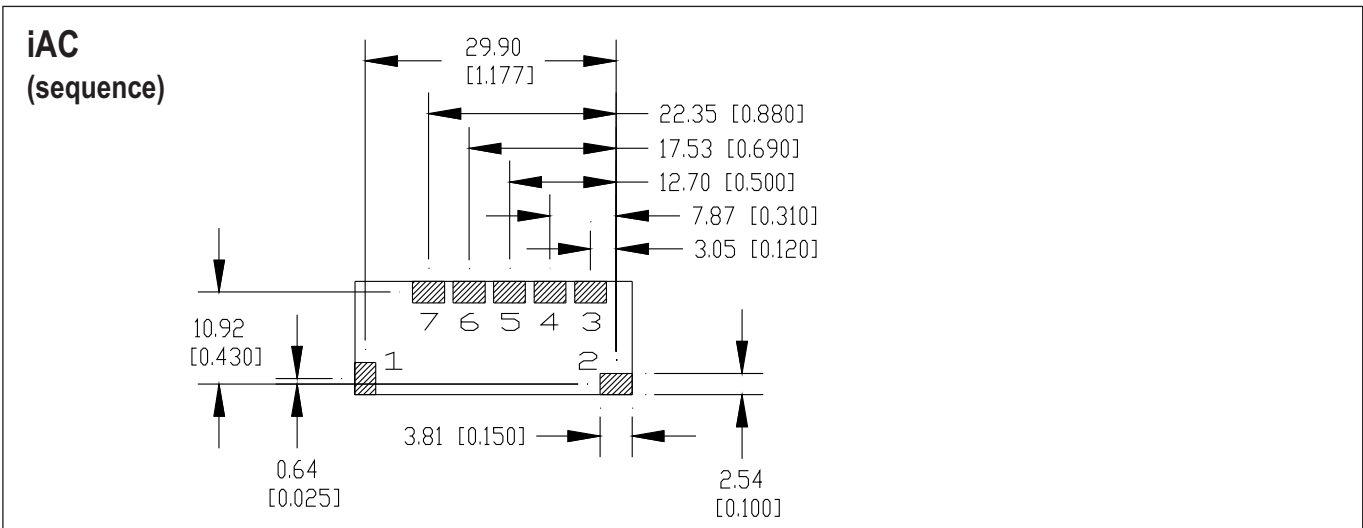



TDK-LAMBDA EMEA

www.emea-tdk-lambda.com



TDK-Lambda France SAS
ZAC des Delaches
BP 1077-Gometz-le-Chatel
91940 LES ULIS
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
www.fr.tdk-lambda.com



TDK-Lambda Germany GmbH
Karl-Bold-Strasse 40
77855 Achern
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda Italy S.r.l.
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@lambda-europe.com
www.it.tdk-lambda.com



TDK-Lambda Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda Scandinavia Sales Office
PO Box 546
Rallarvägen 41
184 40 Åkersberga
Sweden
Tel: +46 854 084 990
Fax: +46 854 066 096
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda UK Ltd.
Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
www.uk.tdk-lambda.com



Nemic Lambda Ltd.
Kibbutz Givat
Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
www.nemic.co.il



TDK-Lambda Americas Inc.
Low Power
3055 Del Sol Blvd
San Diego CA 92154
USA
Tel: +1 800-LAMBDA-4 or 1-800-526-2324
Tel: +1 619-575-4400
Fax: +1 619-429-1011
www.us.tdk-lambda.com/lp/



TDK-Lambda Corporation
5F Dempa Bldg. 1-11-15
Higashi-Gotanda
Shinagawa-Ku
Tokyo 141-0022
Japan
Tel: +81 3 3447 4693
Fax: +81 3 3447 4750
www.tdk-lambda.com

High Power
405 Essex Road Neptune NJ 07753
USA
Tel: +1 732 922 9300
Fax: +1 732 922 1441
www.us.tdk-lambda.com/hp/

LOCAL DISTRIBUTION

