


# Planetary Gearhead GP 13 A $\varnothing 13$ mm, 0.2 - 0.35 Nm

## Technical Data

Planetary Gearhead	straight teeth
Output shaft	stainless steel, hardened
Bearing at output	sleeve bearing
Radial play, 6 mm from flange	max. 0.055 mm
Axial play	0.02 - 0.10 mm
Max. permissible axial load	8 N
Max. permissible force for press fits	100 N
Sense of rotation, drive to output	=
Recommended input speed	< 8000 rpm
Recommended temperature range	-40 ... +100°C
Number of stages	1 2 3 4 5
Max. radial load, 6 mm from flange	8 N 12 N 16 N 20 N 20 N

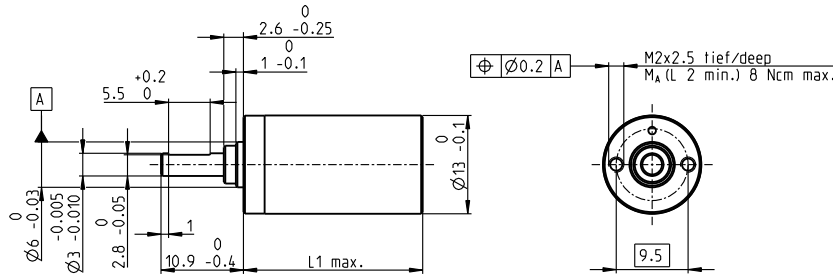


M 1:1

- Stock program
- Standard program
- Special program (on request)

## Order Number

Gearhead Data	110313	110314	110315	110316	110317
	1 Reduction	4.1 : 1	17 : 1	67 : 1	275 : 1
2 Reduction absolute	$\frac{57}{14}$	$\frac{3249}{196}$	$\frac{185193}{2744}$	$\frac{10556001}{38416}$	$\frac{601692057}{537824}$
3 Max. motor shaft diameter mm	1.5	1.5	1.5	1.5	1.5
Order Number	352365	352366	352367	352368	352369
1 Reduction	5.1 : 1	26 : 1	131 : 1	664 : 1	3373 : 1
2 Reduction absolute	$\frac{66}{13}$	$\frac{4356}{169}$	$\frac{287496}{2197}$	$\frac{18974736}{28561}$	$\frac{1252332576}{371293}$
3 Max. motor shaft diameter mm	1.5	1.5	1.5	1.5	1.5
4 Number of stages	1	2	3	4	5
5 Max. continuous torque Nm	0.20	0.20	0.30	0.30	0.35
6 Intermittently permissible torque at gear output Nm	0.30	0.30	0.45	0.45	0.53
7 Max. efficiency %	91	83	75	69	62
8 Weight g	11	14	17	20	23
9 Average backlash no load °	1.0	1.2	1.5	1.8	2.0
10 Mass inertia gcm <sup>2</sup>	0.025	0.015	0.015	0.015	0.015
11 Gearhead length L1* mm	16.0	19.9	23.7	27.6	31.4

\*for A-max 12 and RE-max 13 L1 is + 0.3 mm




## maxon Modular System

+ Motor	Page	+ Sensor/Brake	Page	Overall length [mm] = Motor length + gearhead length + (sensor / brake) + assembly parts				
RE 13	57/59			35.4	39.3	43.1	47.0	50.8
RE 13, 0.75 W	59	MR	255-257	42.5	46.4	50.2	54.1	57.9
RE 13, 0.75 W	59	MEnc 13	274	43.2	47.1	50.9	54.8	58.6
RE 13	61/63			47.6	51.5	55.3	59.2	63.0
RE 13, 2 W	63	MR	255-257	54.7	58.6	62.4	66.3	70.1
RE 13, 2 W	63	MEnc 13	274	55.4	59.3	63.1	67.0	70.8
RE 13, 1.5 W	65/67			38.5	42.4	46.2	50.1	53.9
RE 13, 1.5 W	67	MR	255-257	44.6	48.5	52.3	56.2	60.0
RE 13, 1.5 W	67	MEnc 13	274	46.5	50.4	54.2	58.1	61.9
RE 13, 3 W	69/71			50.7	54.6	58.4	62.3	66.1
RE 13, 3 W	71	MR	255-257	56.8	60.7	64.5	68.4	72.2
RE 13, 3 W	71	MEnc 13	274	58.7	62.6	66.4	70.3	74.1
A-max 12	87/88			37.6	41.5	45.3	49.2	53.0
A-max 12, 0.5 W	88	MR	255-257	41.7	45.6	49.4	53.3	57.1
RE-max 13	115/116			36.9	40.8	44.6	48.5	52.3
RE-max 13, 0.75 W	116	MR	255-257	41.6	45.5	49.3	53.2	57.0
RE-max 13	117/118			47.9	51.8	55.6	59.5	63.3
RE-max 13, 2 W	118	MR	255-257	52.6	56.5	60.3	64.2	68.0
EC 13, 6 W	141			37.4	41.3	45.1	49.0	52.8
EC 13, 12 W	142			49.6	53.5	57.3	61.2	65.0

## Option Ball Bearing

## Order Number

## Technical Data



Gearhead length: L1 + 0.2 mm

Order Number	Technical Data
4.1 : 1 144300	Planetary Gearhead straight teeth
5.1 : 1 352391	Output shaft stainless steel, hardened
17 : 1 144301	Bearing at output preloaded ball bearings
26 : 1 352392	Radial play, 6 mm from flange max. 0.04 mm
67 : 1 144302	Axial play at axial load < 5 N 0 mm
	> 5 N max. 0.04 mm
	Max. permissible axial load 8 N
	Max. permissible force for press fits 25 N
	Sense of rotation, drive to output =
	Recommended input speed < 8000 rpm
	Recommended temperature range -15 ... +100°C
	Extended range as option -35 ... +100°C
	Number of stages 1 2 3 4 5
	Max. radial load, 6 mm from flange 10 N 15 N 20 N 20 N 20 N
	Gearhead values according to sleeve bearing version