

SPECIFICATION

MODEL : SPHWHTS6D333



[Rank : $V_F(S1, S2)$, CIE(P4, Q4, R4, S4, T4, U4, V4, W4),
 $\Phi_V(X1, Y1, Z1, AA)$]

HIGH POWER LED - SUNNIX6G

CUSTOMER :		
CHECKED	CHECKED	APPROVED
Preliminary		

SAMSUNG LED			
DRAWN	CHECKED(Sales)	CHECKED(Quality)	APPROVED

SAMSUNG LED CO.,LTD.
314, MAETAN3-DONG, YEONGTONG-GU,
SUWON-SI, GYUNGGI-DO, KOREA, 443-743

Contents

1.	Product outline	3
2.	Absolute Maximum Rating	3
3.	Characteristics	3
4.	Chromaticity Diagram	5
5.	Typical Characteristic Graphs	6
6.	Outline Drawing and Dimension	9
7.	Solder Conditions	10
8.	Reliability Test Items and Conditions	11
9.	Taping Dimension	12
10.	Label Structure	13
11.	Lot Number	13
12.	Reel Packing Structure	14
13.	Precaution for Use	16
14.	Hazard Substance Analysis	17
15.	Revision History	23

1. Product Outline

1) Features

- Plastic Molded Lead Frame Type : 8.0 mm, 8.0 mm, 3.9 mm
- Built In 6 LED Chips
- Beam View Angle($\Delta\theta$) : 120 °
- Lead(Pb) Free Product : RoHS Compliant

2) Applications

- General Illumination
- Down Lighting
- Decorative Lighting

2. Absolute Maximum Rating

- Operation Forward Current 250 mA
- Peak Pulsed Forward Current 350 mA
(Duty 1/10 and Pulse Width 10 msec)
- Reverse Voltage 16.5 V
- Thermal Resistance ($R_{th J-S}$) \cong 5 °C/W
- Operating Temperature Range (T_{OPR}) -40 °C ~ 85 °C
- Storage Temperature Range (T_{STG}) -40 °C ~ 110 °C
- LED Junction Temperature (T_J) 120 °C

3. Characteristics

1) Electrical properties ($T_a = 25$ °C)

Parameter	Symbol	Condition	Rank	Min.	Typ.	Max.	Unit	
Reverse Voltage	V_R	$I_R = 5$ mA	-	12.0	-	16.5	V	
Forward Voltage	V_F	$I_F = 250$ mA	S0	S1	8.9	-	9.7	V
				S2	9.7	-	10.5	

2) Luminous Flux ($T_a = 25$ °C)

Rank	Symbol	Condition	Min.	Typ.	Max.	Unit
X4	X1	$I_F = 250$ mA	190	-	210	lm
	Y1		210	-	230	
	Z1		230	-	250	
	AA		250	-	270	


3) Chromaticity Coordinates ($T_a = 25\text{ }^\circ\text{C}$)

Rank		CCT(K)	Condition	CCx				CCy			
P4	PW	6,020~7,040	IF = 250 mA	0.3028	0.3117	0.3130	0.3048	0.3304	0.3390	0.3290	0.3209
	PX			0.3048	0.3130	0.3145	0.3068	0.3209	0.3290	0.3187	0.3113
	PY			0.3117	0.3205	0.3213	0.3131	0.3393	0.3481	0.3371	0.3290
	PZ			0.3131	0.3213	0.3221	0.3145	0.3290	0.3371	0.3261	0.3187
Q4	QW	5,310~6,020	IF = 250 mA	0.3207	0.3290	0.3290	0.3215	0.3467	0.3538	0.3417	0.3350
	QX			0.3215	0.3290	0.3290	0.3222	0.3350	0.3417	0.3300	0.3243
	QY			0.3290	0.3376	0.3371	0.3290	0.3538	0.3616	0.3490	0.3417
	QZ			0.3290	0.3371	0.3366	0.3290	0.3417	0.3490	0.3369	0.3300
R4	RW	4,745~5,310	IF = 250 mA	0.3376	0.3463	0.3451	0.3371	0.3616	0.3687	0.3554	0.3490
	RX			0.3371	0.3451	0.3440	0.3366	0.3490	0.3554	0.3428	0.3369
	RY			0.3463	0.3551	0.3533	0.3451	0.3687	0.3760	0.3620	0.3554
	RZ			0.3451	0.3533	0.3515	0.3440	0.3554	0.3620	0.3487	0.3428
S4	SW	4,260~4,745	IF = 250 mA	0.3529	0.3548	0.3641	0.3615	0.3597	0.3736	0.3804	0.3659
	SX			0.3512	0.3529	0.3615	0.3590	0.3465	0.3597	0.3659	0.3521
	SY			0.3615	0.3641	0.3736	0.3702	0.3659	0.3804	0.3874	0.3722
	SZ			0.3590	0.3615	0.3702	0.3670	0.3521	0.3659	0.3722	0.3578
T4	TW	3,710~4,260	IF = 250 mA	0.3702	0.3736	0.3869	0.3825	0.3722	0.3874	0.3958	0.3798
	TX			0.3670	0.3702	0.3825	0.3783	0.3578	0.3722	0.3798	0.3646
	TY			0.3825	0.3869	0.4006	0.3950	0.3798	0.3958	0.4044	0.3875
	TZ			0.3783	0.3825	0.3950	0.3898	0.3646	0.3798	0.3875	0.3716
U4	UW	3,220~3,710	IF = 250 mA	0.3941	0.3996	0.4146	0.4080	0.3848	0.4015	0.4089	0.3916
	UX			0.3889	0.3941	0.4080	0.4017	0.3690	0.3848	0.3916	0.3751
	UY			0.4080	0.4146	0.4299	0.4221	0.3916	0.4089	0.4165	0.3984
	UZ			0.4017	0.4080	0.4221	0.4147	0.3751	0.3916	0.3984	0.3814
V4	VW	2,870~3,220	IF = 250 mA	0.4221	0.4299	0.4430	0.4342	0.3984	0.4165	0.4212	0.4028
	VX			0.4147	0.4221	0.4342	0.4259	0.3814	0.3984	0.4028	0.3853
	VY			0.4342	0.4430	0.4562	0.4465	0.4028	0.4212	0.4260	0.4071
	VZ			0.4259	0.4342	0.4465	0.4373	0.3853	0.4028	0.4071	0.3893
W4	WW	2,580~2,870	IF = 250 mA	0.4465	0.4562	0.4687	0.4582	0.4071	0.4260	0.4289	0.4099
	WX			0.4373	0.4465	0.4582	0.4483	0.3893	0.4071	0.4099	0.3919
	WY			0.4582	0.4687	0.4813	0.4700	0.4099	0.4289	0.4319	0.4126
	WZ			0.4483	0.4582	0.4700	0.4593	0.3919	0.4099	0.4126	0.3944

※ Tolerance : $V_F : \pm 0.1$, $\Phi_V : \pm 10\%$, CCx CCy : ± 0.02

※ Color Rendering Index (Ra) : Typ.77

4. Chromaticity Diagram

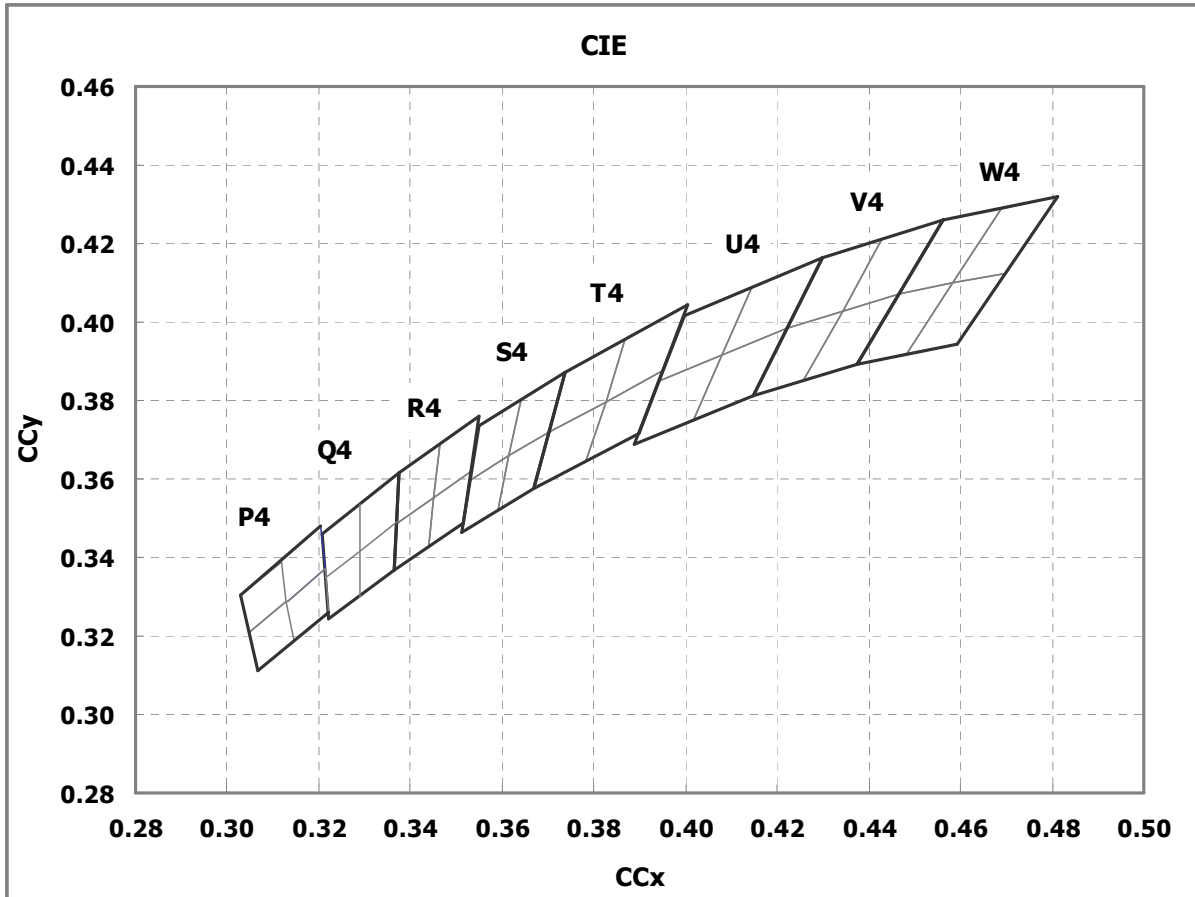

※ Correspondence Table of CIE - Luminous Flux Rank


CIE Rank	Luminous Rank			
	X1	Y1	Z1	AA
P4				
Q4				
R4				
S4				
T4				
U4				
V4				
W4				

Approved Rank


Symbol	V _F	CIE	Φ _V
Rank	S1, S2	P4, Q4, R4, S4, T4, U4, V4, W4	X1, Y1, Z1, AA

5. Typical Characteristic Graphs


Relative Luminous Flux vs. Forward Current

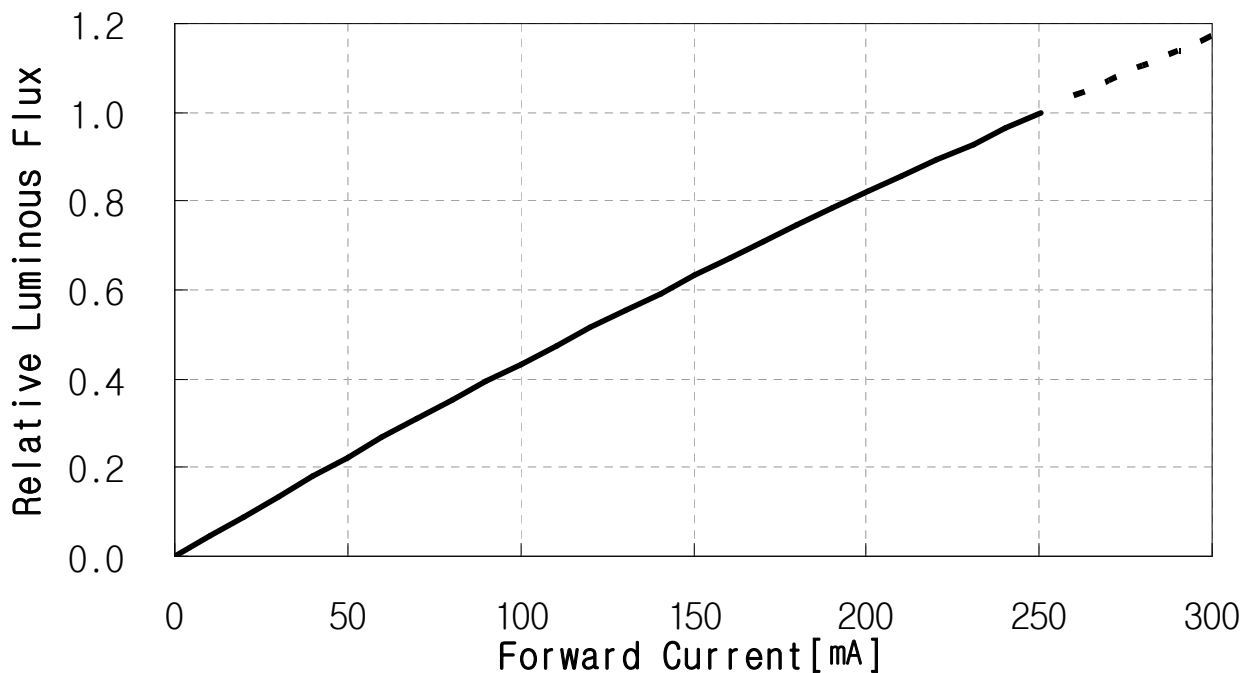


Forward Current vs. Forward Voltage

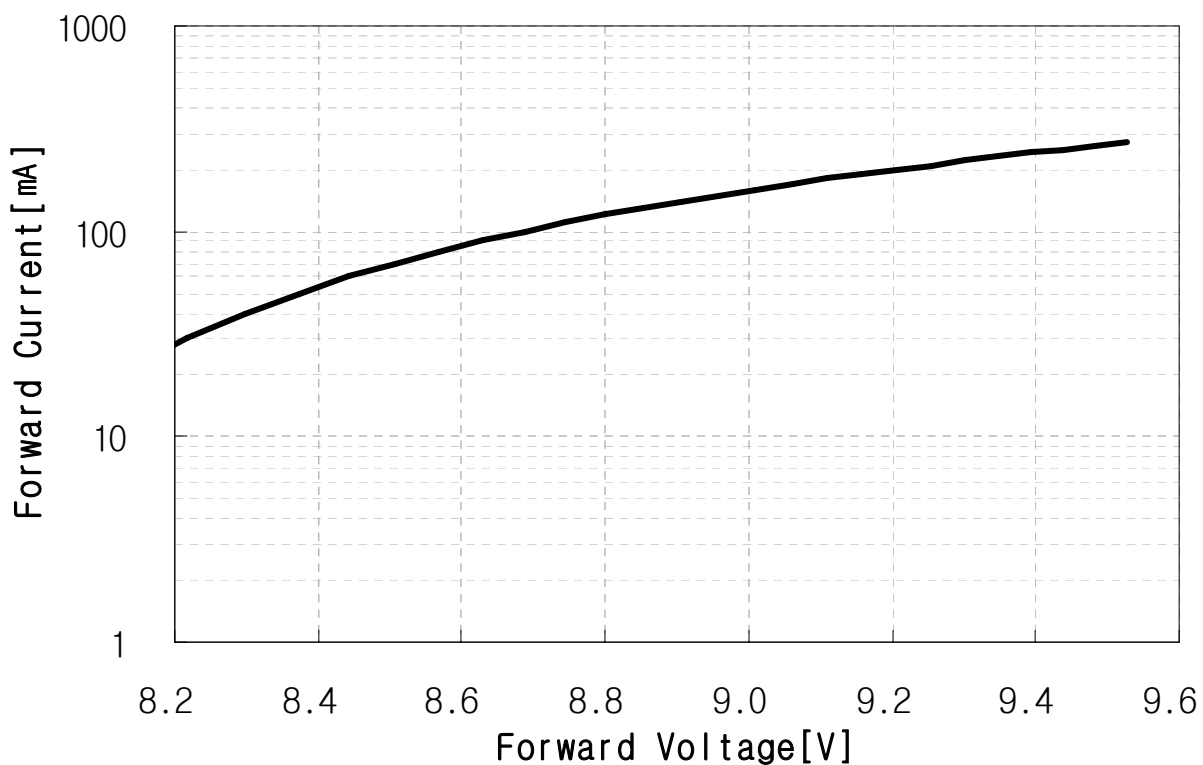


Spectrum Distribution

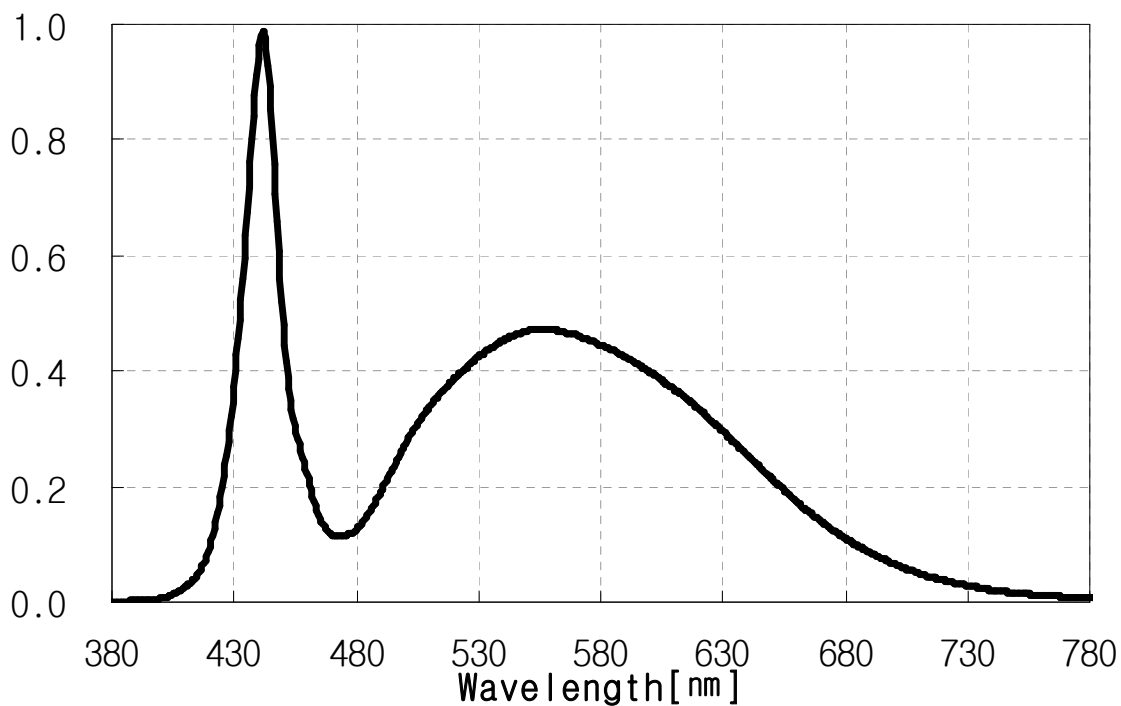


Radiation Diagram

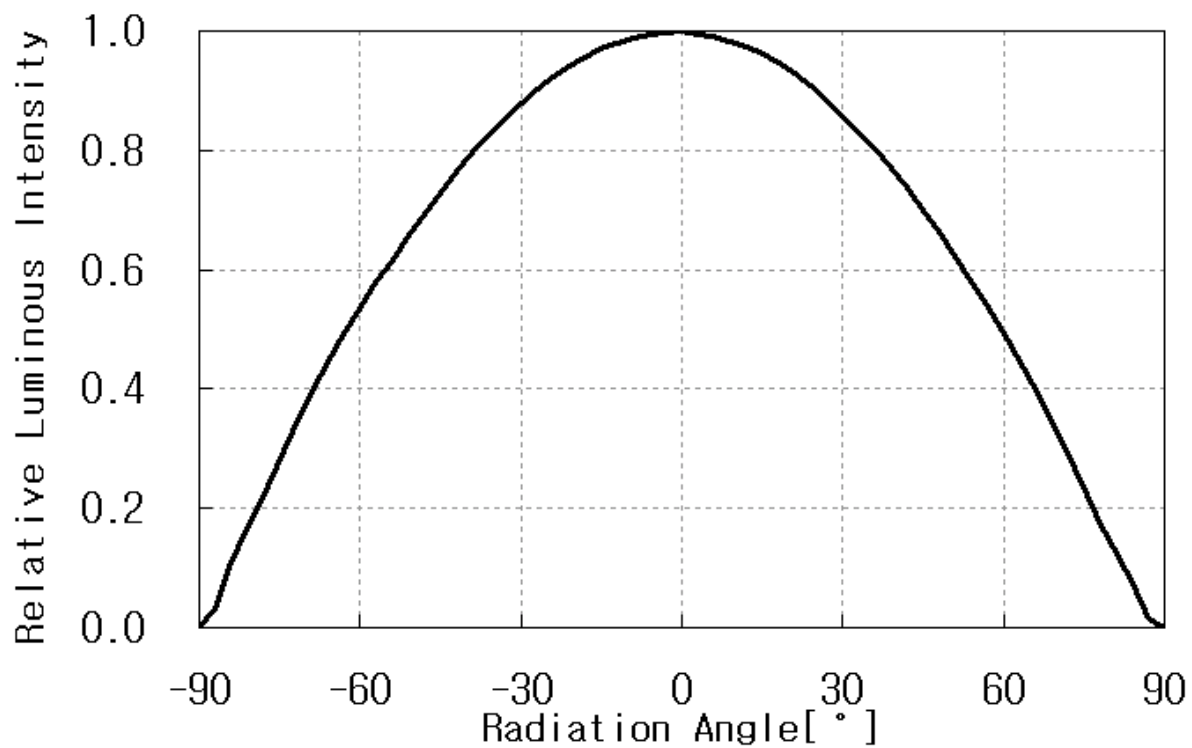

Derating Curve for 250mA ※

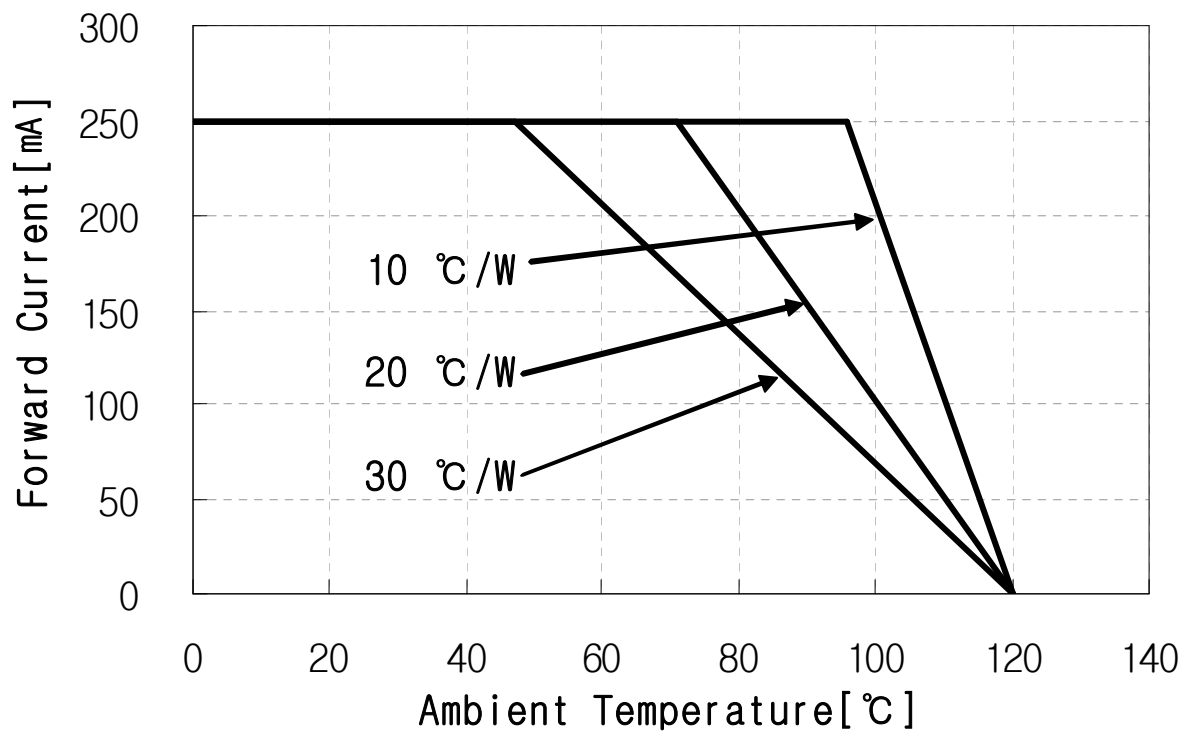



Relative Forward Voltage vs Ambient temperature

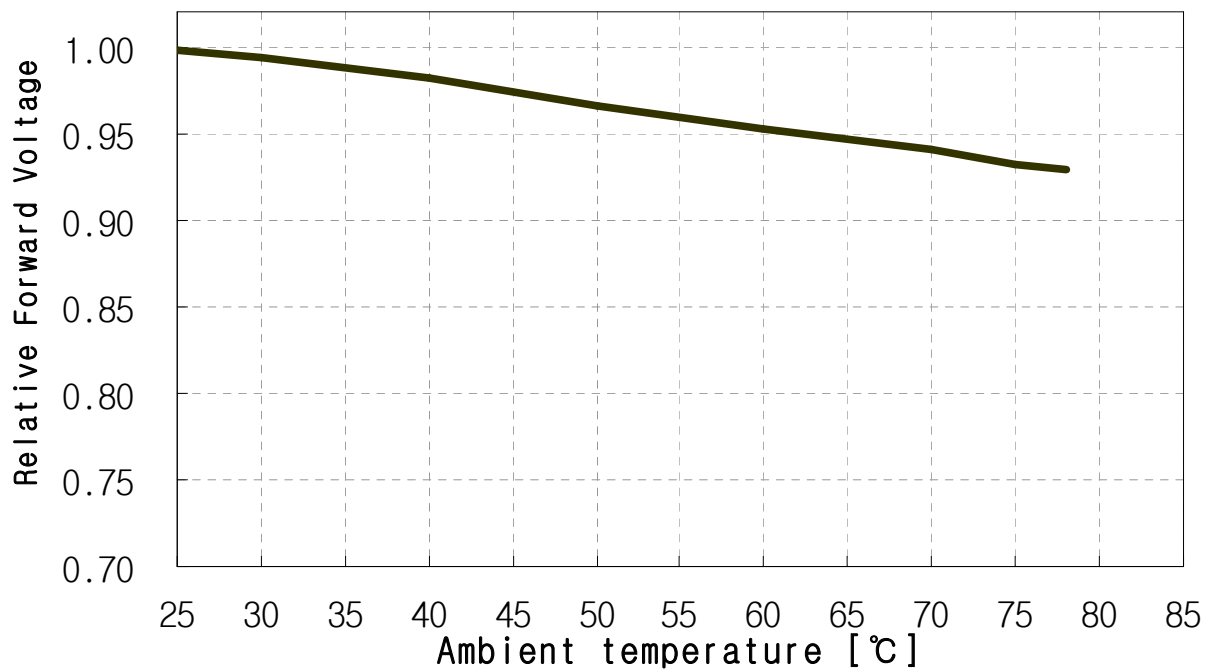

6. Outline Drawing and Dimension

Unit : mm


Tolerance : ± 0.2

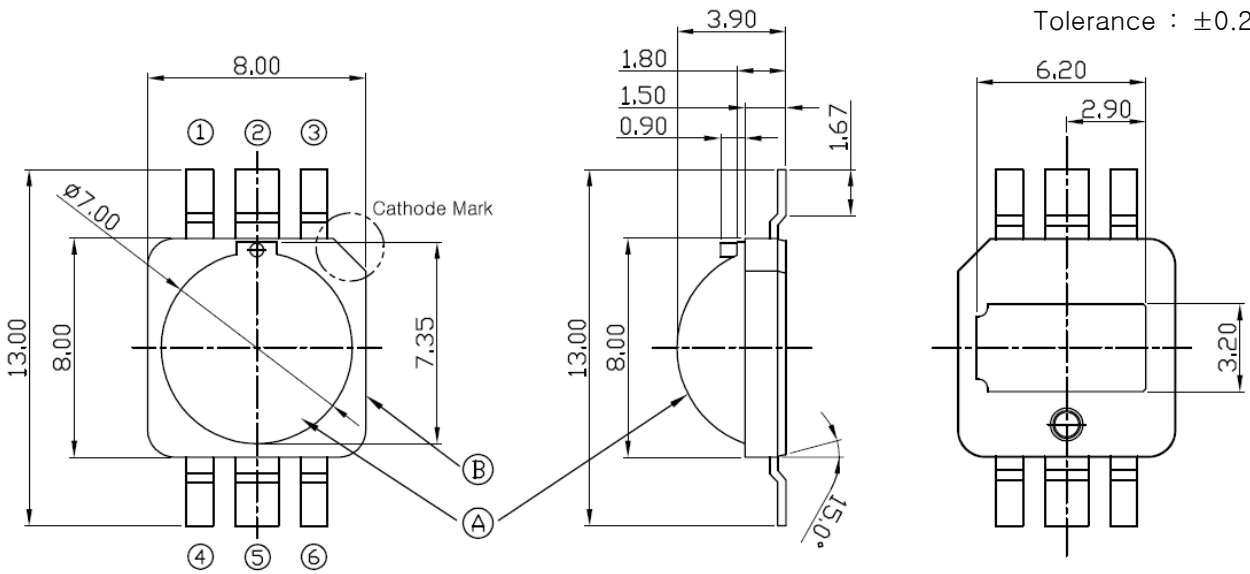

Pick and Place

1. Do not place pressure on the encapsulating resin ("A")
2. The maximum compressing force is 15N on the polymer ("B")

Solder Pattern for Surface Mount

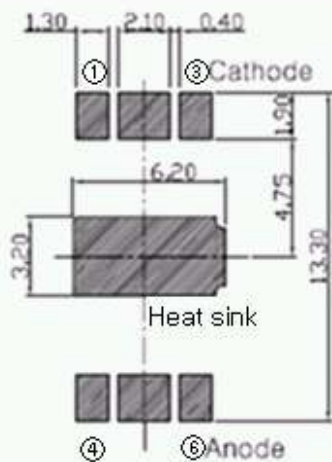


Remarks

- * Heat sink is to be soldered, If not, use the heat conductive adhesive.
- * This LED has built-in ESD protection device(s) connected in parallel to LED chip(s).

7. Solder Conditions

1) Reflow Conditions (Pb-Free)

Reflow Frequency : 2 time max.

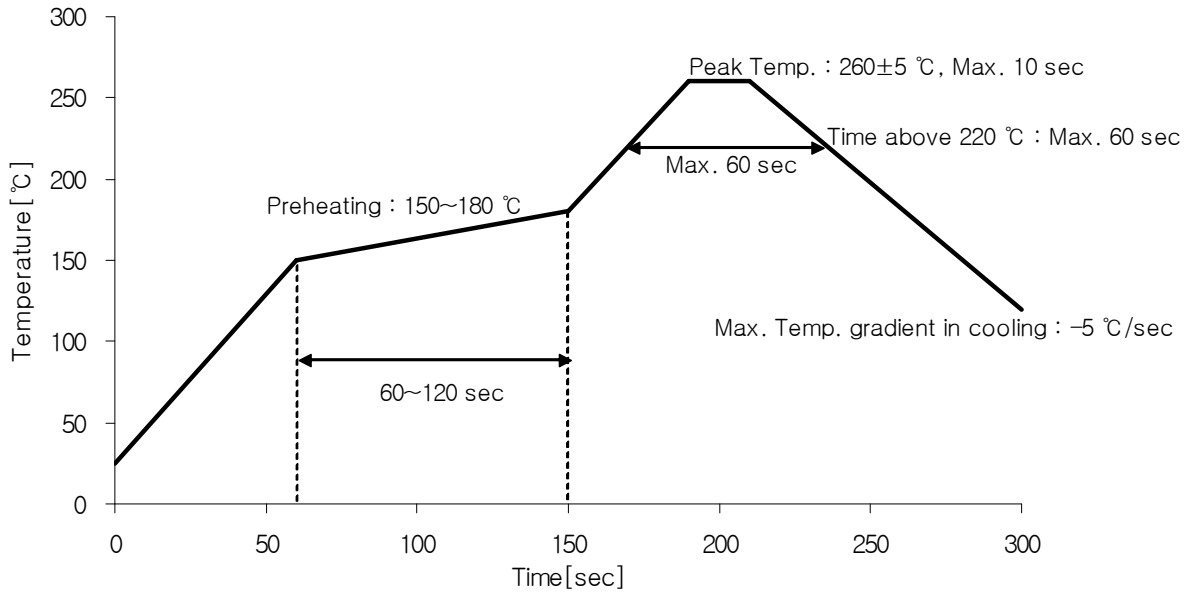


2) For Manual Soldering

Not more than 5 seconds @Max. 300 °C, under soldering iron.

8. Reliability Test Items and Conditions

1) Test Items




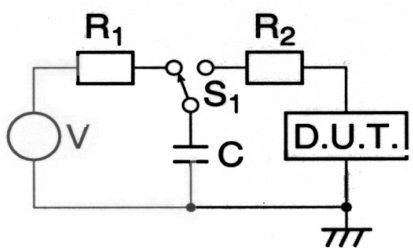
Test Items	Test Conditions	Test Hours/Cycles
Room Temperature life test	25 °C, $I_F = \text{Max DC}^*$	1,000 h
High Temperature humidity life test	85 °C, 85 % RH, $I_F = \text{Max DC}^*$	1,000 h
High Temperature life test	85 °C, $I_F = \text{Max DC}^*$	1,000 h
Low Temperature life test	-40 °C, $I_F = \text{Max DC}^*$	1,000 h
High Temperature Storage	110 °C	1,000 h
Low Temperature Storage	-40 °C	1,000 h
Thermal Shock	-40 / 120 °C, each 30 min	200 cycles
Temperature humidity Cycle On/Off test	-40 / 85 °C, each 20 min, 100 min transfer Power On/off each 5 min, Max DC*	100 cycles
Reflow (Pb-Free)	Peak 260±5 °C for 10 sec	3 times
ESD(HBM)	 <p>R1 : 10 MΩ , R2 : 1.5 kΩ , C : 100 pF</p>	3 times (± 5 kV)

2) Criteria for Judging the Damage

Item	Symbol	Test Condition	Limit	
			Min	Max
Forward Voltage	V_F	$I_F = 250 \text{ mA}$	-	U.S.L.*1.1
Luminous Flux	Φ_V	$I_F = 250 \text{ mA}$	L.S.L.*0.3	-
Reverse Voltage	V_R	$I_R = 5 \text{ mA}$	-	U.S.L.*2.0

* U.S.L : Upper Standard Level, L.S.L : Lower Standard Level


9. Taping Dimension

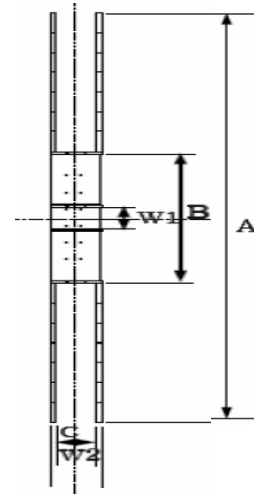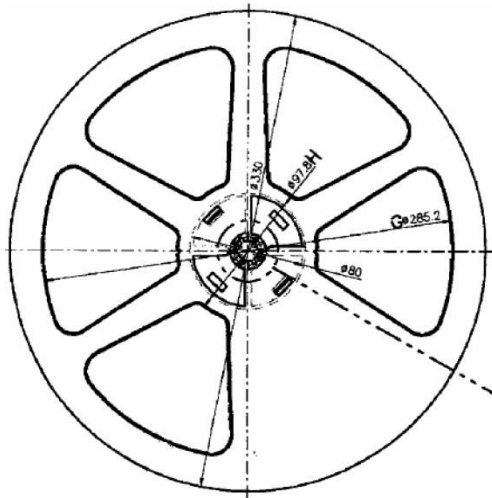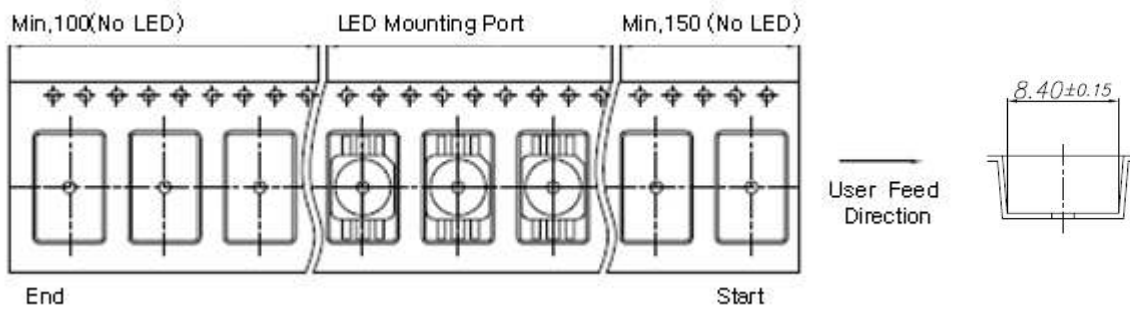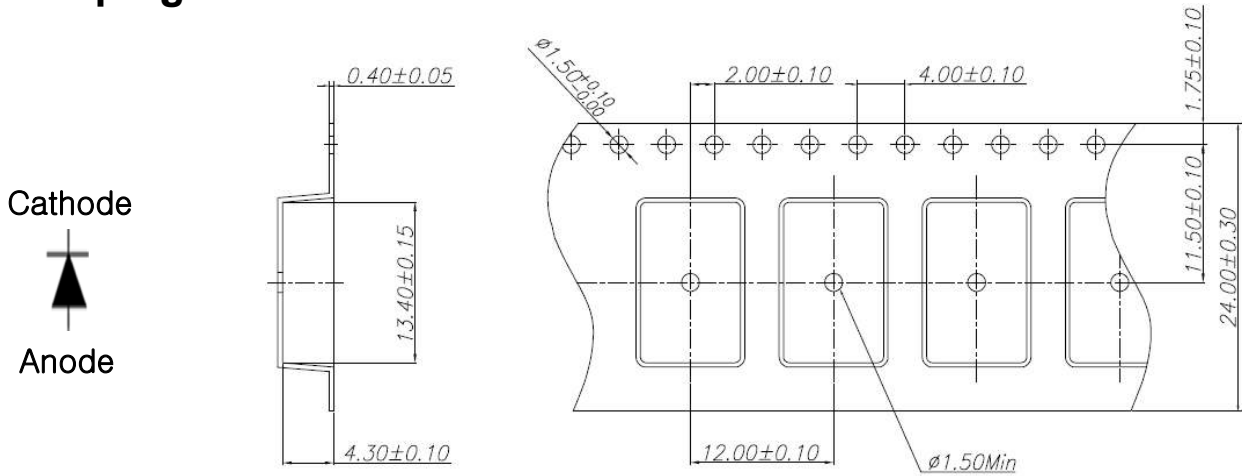

Symbol	A	B	C	W1	W2
Dimension(mm)	330 ± 1	80 ± 1	25 ± 0.5	13 ± 0.3	29.5 ± 1

- (1) Quantity : 1,000 Pcs / 13" Reel.
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches is less than ±0.2 mm
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at 10 °C angle to be the carrier tape.
- (4) Packaging : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package

10. Label Structure

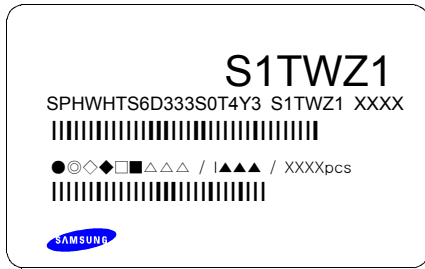

Rank Code

/S1/ : VF Rank (refer to page 3)

/TW/ : Chromaticity Coordinate Rank, CIE (refer to page 4)

/Z1/ : Luminous Flux (refer to page 3)

11. Lot Number

The Lot number is composed of the following characters

●◎◇◆□■△△△ / |▲▲▲ / xxxx PCS

● : Production Site (S:SAMSUNG LED, G:Gosin China, L:SOLLEDS)

◎ : L (LED)

◇ : Product State (A:Normality, B:Bulk, C:First Production, R:Reproduction, S:Sample)

◆ : Year (T:2009, U:2010, V:2011...)

□ : Month (1 ~ 9, A, B)



■ : Day (1 ~ 9, A, B ~ V)

△ : SAMSUNG LED Product Number (1 ~ 999)


▲ : Reel Number (1 ~ 999)

12. Reel Packing Structure

1) Reel

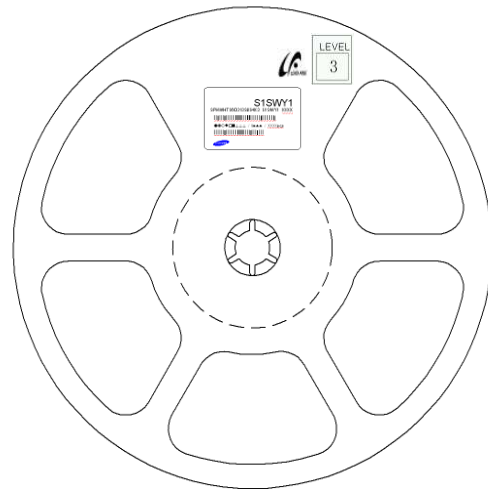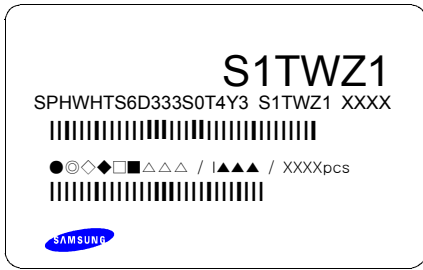


2) Aluminum Bag



3) Inner Box

Material : Paper(SW3B(B))


TYPE	SIZE(mm)		
	L	W	H
13inch	335	45	335

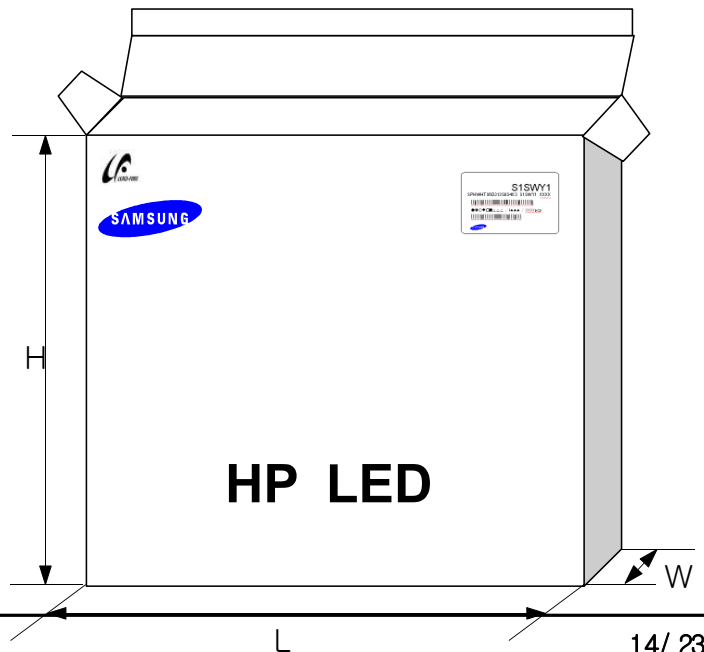

4) Carton Box

Material : Paper(SW3B(B))

TYPE	SIZE(mm)		
	L	W	H
13inch	350	350	350

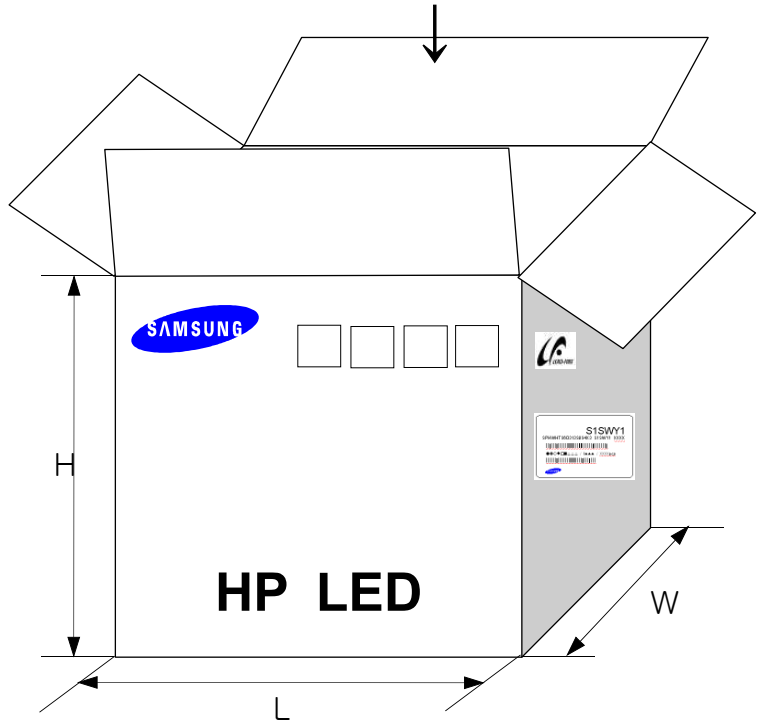

13. Precaution for Use

- 1) For over-current-proof function, customers are recommended to apply resistors to prevent sudden change of the current caused by slight shift of the voltage.
- 2) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA is recommended to use.
- 3) When the LEDs illuminate, operating current should be decided after considering the ambient maximum temperature.
- 4) LEDs must be stored in a clean environment. If the LEDs are to be stored for 3 months or more after being shipped from SAMSUNG LED, they should be packed by a sealed container with nitrogen gas injected. (Shelf life of sealed bags : 12 months, temp. 0~40℃, 20~70%RH)
- 5) After storage bag is open, device subjected to soldering, solder reflow, or other high temperature processes must be:
 - a. Mounted within 72 hours (3days) at an assembly line with a condition of no more than 30℃/60%RH,
 - b. Stored at <10% RH.
- 6) Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- 7) Devices require baking before mounting, if humidity card reading is >60% at 23±5℃.
- 8) Devices must be baked for 24hours at 65±5℃, if baking is required.
- 9) The LEDs are sensitive to the static electricity and surge. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
 If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices.
 Damaged LEDs may show some unusual characteristics such as increase in leak current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.

14. Hazard Substance Analysis



Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 1 of 6

To: SAMSUNG LED CO., LTD.
314, Maetan-dong
Yeongtong-gu
Suwon-city
GYEONGGI-DO 443-743
Korea

The following merchandise was submitted and identified by the client as :

SGS File No. : AYAA11-02853
Product Name : LED
Item No./Part No. : Sunnix8G
Received Date : Jan 21, 2011
Test Period : Jan 24, 2011 to Jan 27, 2011
Test Performed : SGS Testing Korea tested the sample(s) selected by applicant with following results
Test Results : For further details, please refer to following page(s)
Comments : By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.

Timothy Jeon
Jinhee Kim
Cindy Park
Jerry Jung / Testing Person

SGS Testing Korea Co. Ltd.

Jeff Jang / Chemical Lab Mgr

The document is issued by the Company subject to its General Conditions of Service printed on request or available at www.sgs.com and www.sgs.com/usa and to standard local documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/usa/electronic. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any notice of the document is subject to the information contained herein reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions. If any. The Company's sole responsibility is to its Client and this document does not constitute advice or a guarantee from avoidance of legal rights and obligations under the applicable laws. This document cannot be reproduced except in full without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is illegal and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated, the results shown in this test report refer only to the samples tested and such samples are retained for 90 days only.

F052 Version3

SGS Testing Korea Co., Ltd.

322, The O valley, 555-8, Hoggw-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
T +82 (0)31 4808 000 F +82 (0)31 4908 050 <http://www.sgs.com> <http://www.sgs.com/greenlab>

Member of the SGS Group (Societ  G minals de Surveillance)


Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 2 of 6

Sample No. : AYAA11-02853.001

Sample Description : LED

Item No./Part No. : Sunnix8G

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	With reference to IEC 62321:2008, ICP	0.5	N.D.
Lead (Pb)	mg/kg	With reference to IEC 62321:2008, ICP	5	N.D.
Mercury (Hg)	mg/kg	With reference to IEC 62321:2008, ICP	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	With reference to IEC 62321:2008, UV-VIS	1	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Decabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Monobromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Decabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service (which are available on request or accessible at www.sgs.com) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/sgs_electronic_docs. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute a guarantee, warranty or assumption of liability for the accuracy or completeness of the information contained herein. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.

F052 Version3

SGS Testing Korea Co., Ltd.

 322, The O valley, 555-0, Hoggae-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 431-080
 T +82 (0)31 4508 000 F +82 (0)31 4508 059 <http://www.sgs.com> www.kr.sgs.com/greenlab

Member of the SGS Group (Société Générale de Surveillance)



Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 3 of 6

Sample No. : AYAA11-02853.001
Sample Description : LED
Item No./Part No. : Sunnix6G

Halogen Contents

Test Items	Unit	Test Method	MDL	Results
Fluorine(F)	mg/kg	BS EN 14582:2007 , IC	30	105
Bromine(Br)	mg/kg	BS EN 14582:2007 , IC	30	N.D.
Chlorine(Cl)	mg/kg	BS EN 14582:2007 , IC	30	N.D.
Iodine(I)	mg/kg	BS EN 14582:2007 , IC	50	N.D.

Other(s)

Test Items	Unit	Test Method	MDL	Results
PFOS(Perfluorooctane Sulfonates-Acid/Metal Salt/Amide)	mg/kg	US EPA 3540C/3550C, LC/MS	1	N.D.

- NOTE:**
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm2 sample surface area.


This document is issued by the Company subject to its General Conditions of Service (printed material) available on request or accessible at www.sgs.com and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/sgs_electronic. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses (printed text). Any notice of the document is subject to the Company's liability at the date of its issuance only and under the sole of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not constitute evidence in a proceeding from anything of their signs and signatures under the signature documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is strictly prohibited and may be prosecuted to the fullest extent of the law. (Please observe water for results shown in this test report which only in the original tested and each sample are related to 100 days only)



Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 4 of 6

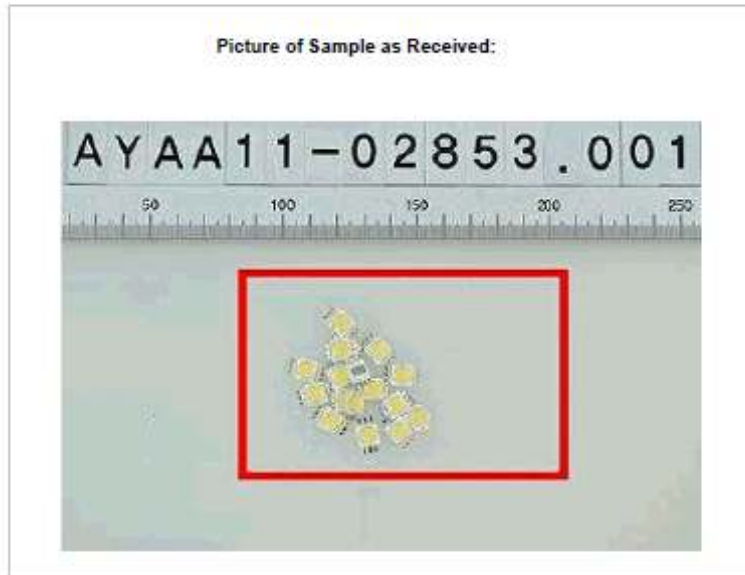

- NOTE:
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 - Negative = Absence of CrVI coating
 - Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its Standard Conditions of Service (which are available on request or accessible at www.sgs.com/terms-and-conditions) and, for analytical formal documents, subject to Terms and Conditions for Analytical Documents at www.sgs.com/analytical-conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein. Any notice of this document is subject to the information contained therein reflects the Company's findings at the time of its preparation only and after the date of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute advice in a transaction. Any warranty, liability or obligation under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is prohibited and otherwise may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such samples are retained for 30 days only.




Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 5 of 6

Testing Flow Chart for RoHS: Cd/Pb/Hg/Cr⁶⁺/PBBs&PBDEs Testing

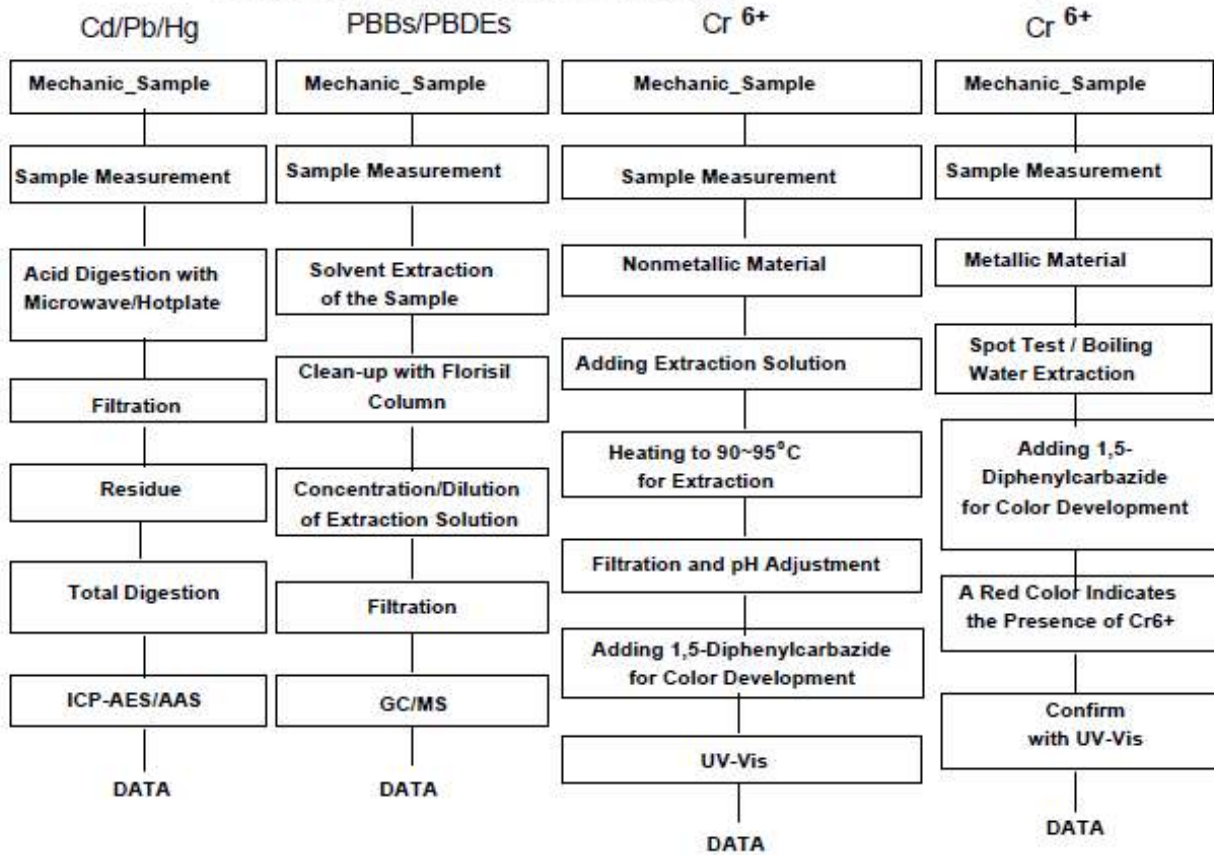

The samples were dissolved totally by pre-conditioning method according to above flow chart for Cd,Pb,Hg.

Section Chief : Gilsae Yi

- NOTE:
- (1) N.D. = Not detected, (<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 - Negative = Absence of CrVI coating
 - Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

The document is issued by the Company subject to its General Conditions of Service (which are available at www.sgslab.com) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgslab.com. Attention is drawn to the location of liability, intellectual property and jurisdiction issues (which are stated in the document) in which the document is issued. The information contained herein reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute evidence in a transaction from anything of that nature and is subject to the terms and conditions of the document. This document should be approved except in its original form without approval of the Company. Any unauthorised alteration, copying or distribution of the content or appearance of this document in whole or in part may be prohibited. The signed version of the document is the only valid version. The document is valid only for the samples tested and each sample is retained for 100 days only.




Test Report No. F690501/LF-CTSAYAA11-02853

Issued Date: January 27, 2011

Page 6 of 6

Flow Chart for Halogen Test

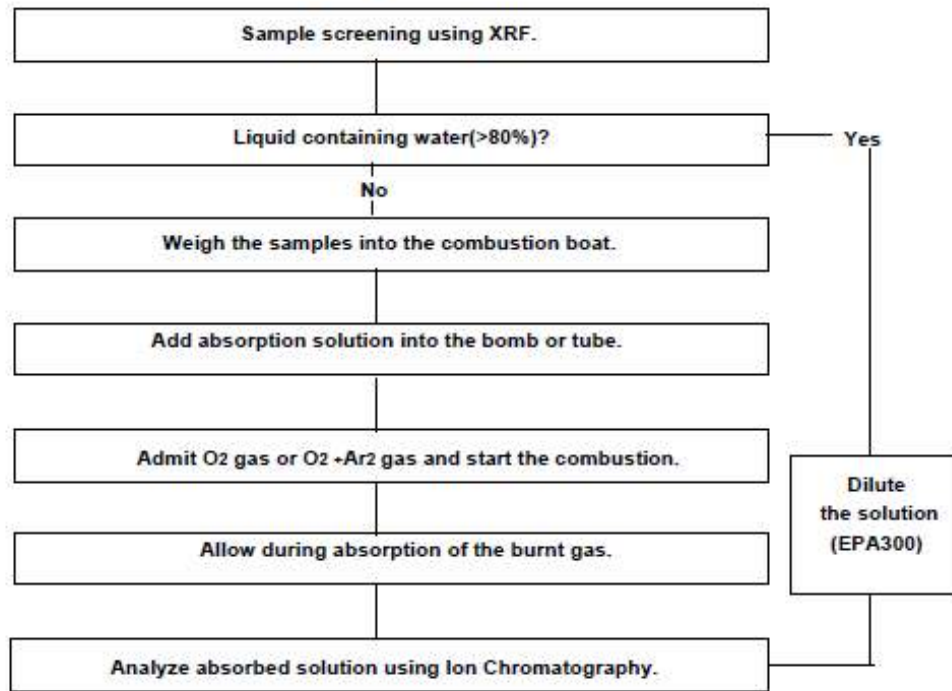

*** End ***

- NOTE:
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm2 sample surface area.

This document is issued by the Company subject to its General Conditions of Service (printed contract) available on request or accessible at www.sgs.com and www.sgslab.com and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/etd. Attention is drawn to the location of liability, jurisdiction and arbitration clause (arbitration clause) in this document is subject to the Company's policy at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not constitute evidence in a transaction that exceeds all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, copying or distribution of the content or appearance of this document is strictly prohibited. The full extent of the law. Unless otherwise stated the results shown in this test report refer only to the samples tested and each sample is considered to be 100 ggs only.

