

SPECIFICATION
MODEL : SPHWW1HDDA05



[Approved Rank : $V_F(17.6)$, CCT(3000), $I_{mV}(760)$]

HV-DC WA6 LED

CUSTOMER :		
DRAWN	CHECKED	APPROVED

SAMSUNG LED		
DRAWN	CHECKED	APPROVED

PRELIMINARY

SAMSUNG LED CO.,LTD.
314. MAETAN3-DONG, YEONGTONG-KU,
SUWON-SI,GYUNGKI-DO,KOREA,442-743

Contents

1. Product Outline	-----	3
2. Absolute Maximum Rating	-----	3
3. Characteristics	-----	3
4. Typical Characteristics Graph	-----	6
5. Outline Drawing & Dimension	-----	7
6. Reliability Test Items & Conditions	-----	8
7. Label Structure	-----	9
8. Lot Number	-----	9
9. Reel Packing Structure	-----	10
10. Aluminium Packing Bag	-----	11
11. Precaution For Use	-----	12
12. Revision History	-----	13

1. Product Outline

1) Features

- 11W HVDC LED : 25.25 x 20.25 x t 6.9 (mm)
- Wide Beam Angle ($\Delta\theta$: 125° x 125°) for uniform illuminance
- InGaN/GaN MQW LED with long-time reliability
- Lead (Pd) free product – RoHS compliant

2) Applications

- Substitution for Incandescent lamp
- Substitution for Fluorescent lamp
- Substitution for Signal lamp
- Other applications

2. Absolute Maximum Rating

- 1) Operation Forward Current ($T_a = 25^\circ\text{C}$) 610 mA
- 2) Flash Mode Peak Pulsed Forward Current 660 mA
(Pulse width $t \leq 10\text{msec}$, Duty ratio=0.06, $T_a=25^\circ\text{C}$)
- 3) Thermal Resistance ($R_{\text{th,j-s}}$) 2.24 $^\circ\text{C/W}$
- 4) LED Junction Temperature (T_J) 150 $^\circ\text{C}$
- 5) Operating Temperature Range (T_{opr}) -40 $^\circ\text{C}$ ~ 80 $^\circ\text{C}$
- 6) Storage Temperature Range (T_{stg}) -40 $^\circ\text{C}$ ~ 100 $^\circ\text{C}$

3. Characteristics

1) Electro-Optical characteristics

($T_a : 25^\circ\text{C}$)

Item	Unit	Condition	Rank	Min	Typ	Max
Luminous Flux	lm	$I_F = 460 \text{ mA}^{1)}$	-	680	760 ²⁾	860
Forward Voltage (V_F)	V ³⁾	$I_F = 460 \text{ mA}$	-	16.6	17.6	18.6
CCT	K	$I_F = 460 \text{ mA}$	-		3000 ⁴⁾	
CRI		$I_F = 460 \text{ mA}$	-	80		
View Angle ⁵⁾	°				125°	
Size	mm			25.25 x 20.25 x 6.9 ⁶⁾		

Notes:


- 1) Samsung LED tested in pulsed condition. $T_J=25^\circ\text{C}$, pulse width is 10ms at rated test current because of LED Thermal degradation. (Thermal degradation factor is depend on chip and package parameters)
- 2) Samsung LED has $\pm 10\%$ tolerance of flux measurements.
- 3) Samsung LED has $\pm 5\%$ tolerance of forward voltage measurements.
- 4) Samsung LED has $\pm 5\%$ tolerance of CCT measurements.
- 5) Samsung LED tested in DC=610mA when luminous flux is saturated.
- 6) Samsung LED has $\pm 0.15 \text{ mm}$ tolerance on device dimensions.

2) Electro-Optical characteristics


Model	If (mA)	Vf (V)	Flux (lm)	Lm/W	CRI
5W	310	17.2	CW 700	132	70+
			WW 530	100	80+
6W	360	17.3	CW 800	129	70+
			WW 620	99	80+
7W	410	17.4	CW 910	127	70+
			WW 690	97	80+
8W	460	17.6	CW 1000	125	70+
			WW 760	95	80+
9W	510	17.75	CW 1100	123	70+
			WW 840	93	80+
10W	560	17.9	CW 1200	120	70+
			WW 910	91	80+
11W	610	18.05	CW 1300	118	70+
			WW 1000	90	80+

3) Chromaticity Diagram

(T_a : 25°C)

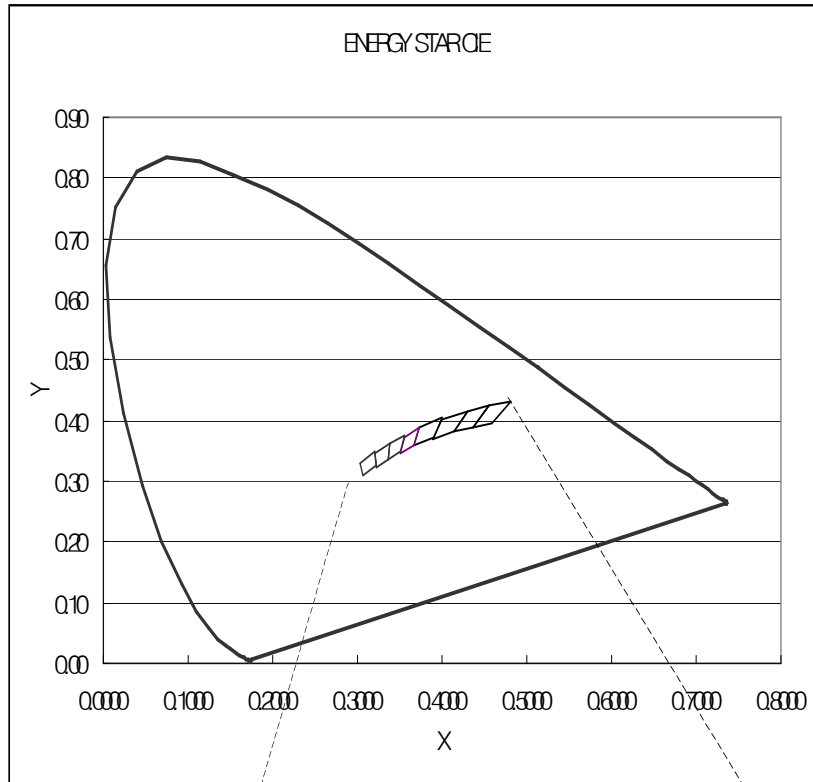

CIE Diagram

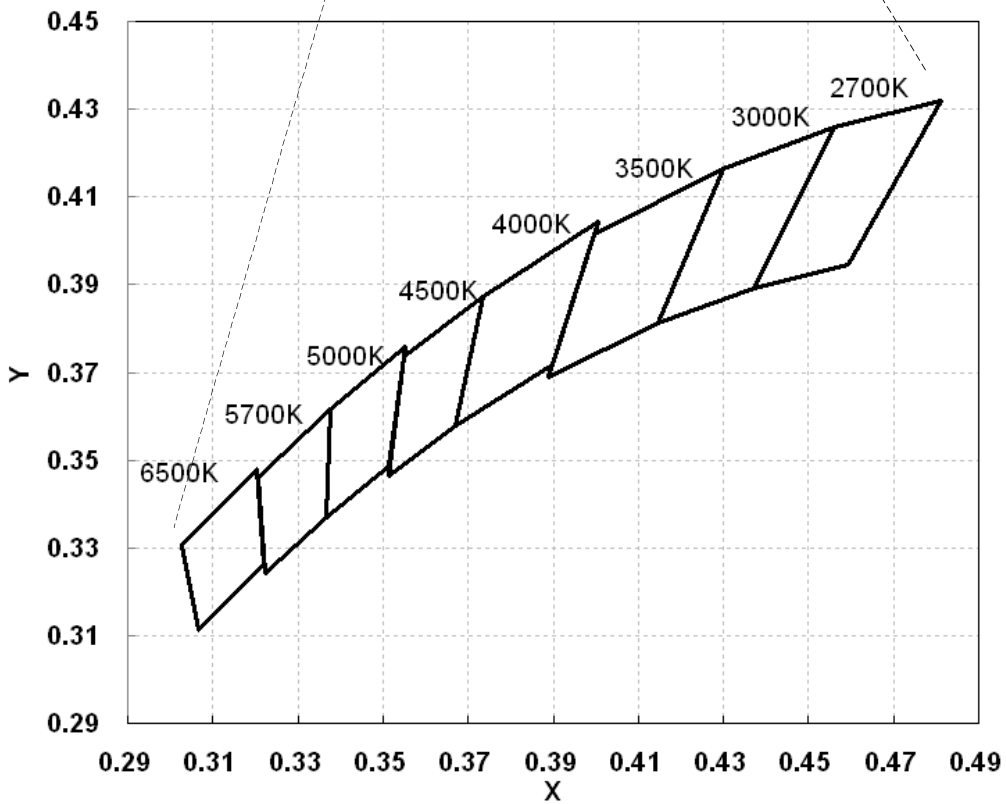


4. Typical Characteristics Graph


* These graphs show typical values.

($T_a = 25^\circ\text{C}$)

Luminous Flux vs. Forward Current

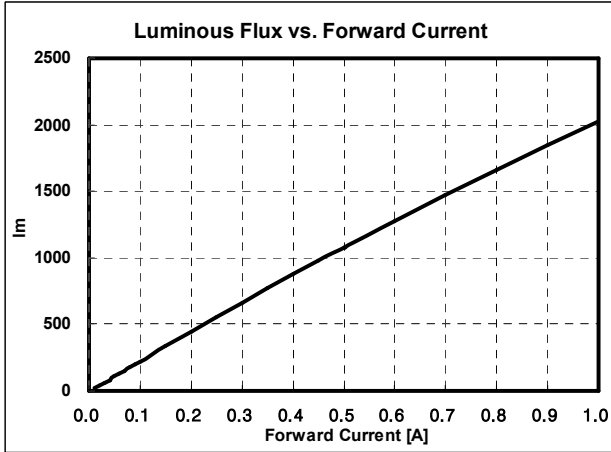


Forward Current vs. Forward Voltage

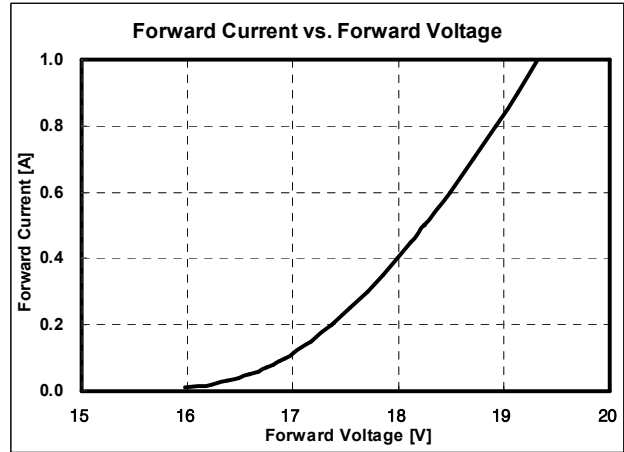


NOTE : Kiethley max current 1A (compliance 63v)


Radiation Pattern

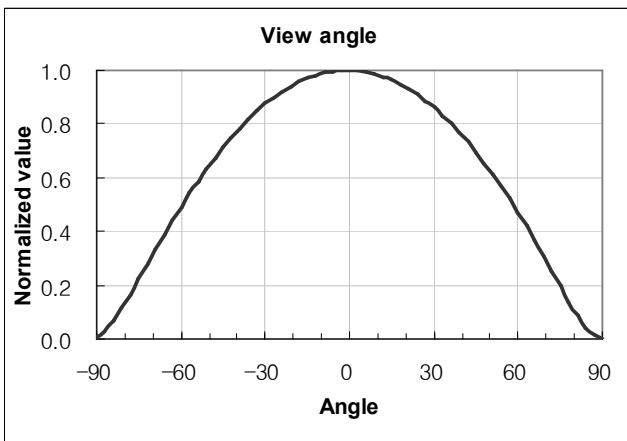


Relative Spectral Emission

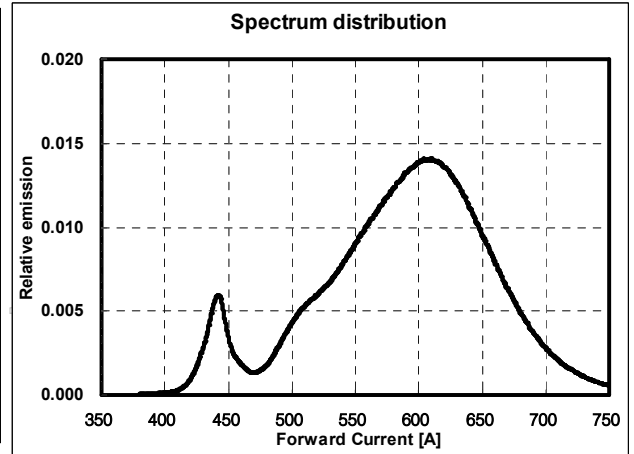


Color x,y vs. Forward current

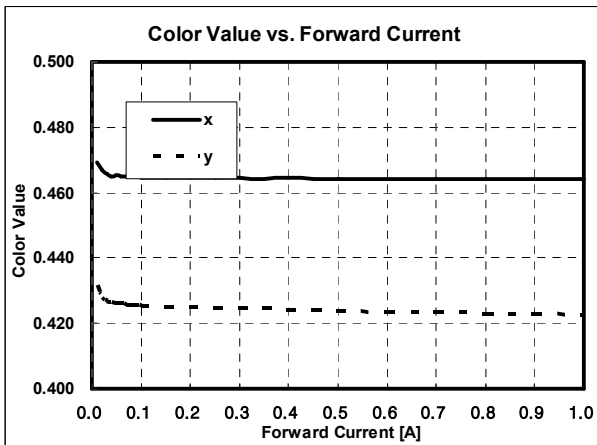

CCT vs. Forward current

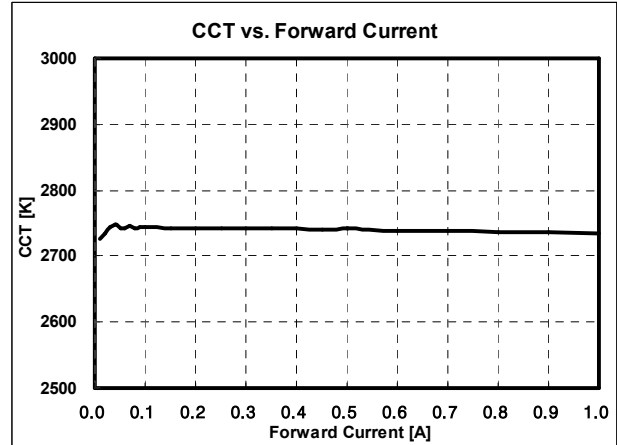

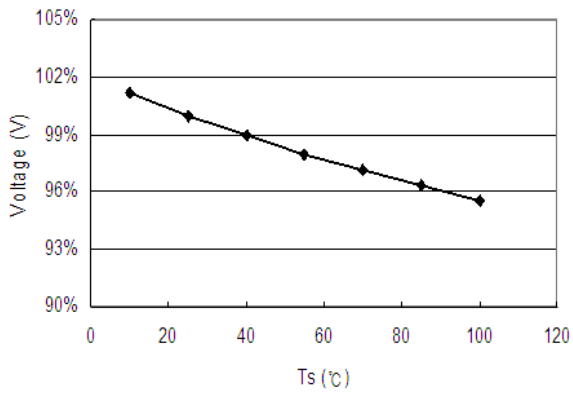
Voltage vs. Temperature

PRELIMINARY

5. Outline Drawing & Dimension

unit : mm

Tolerance : ± 0.15

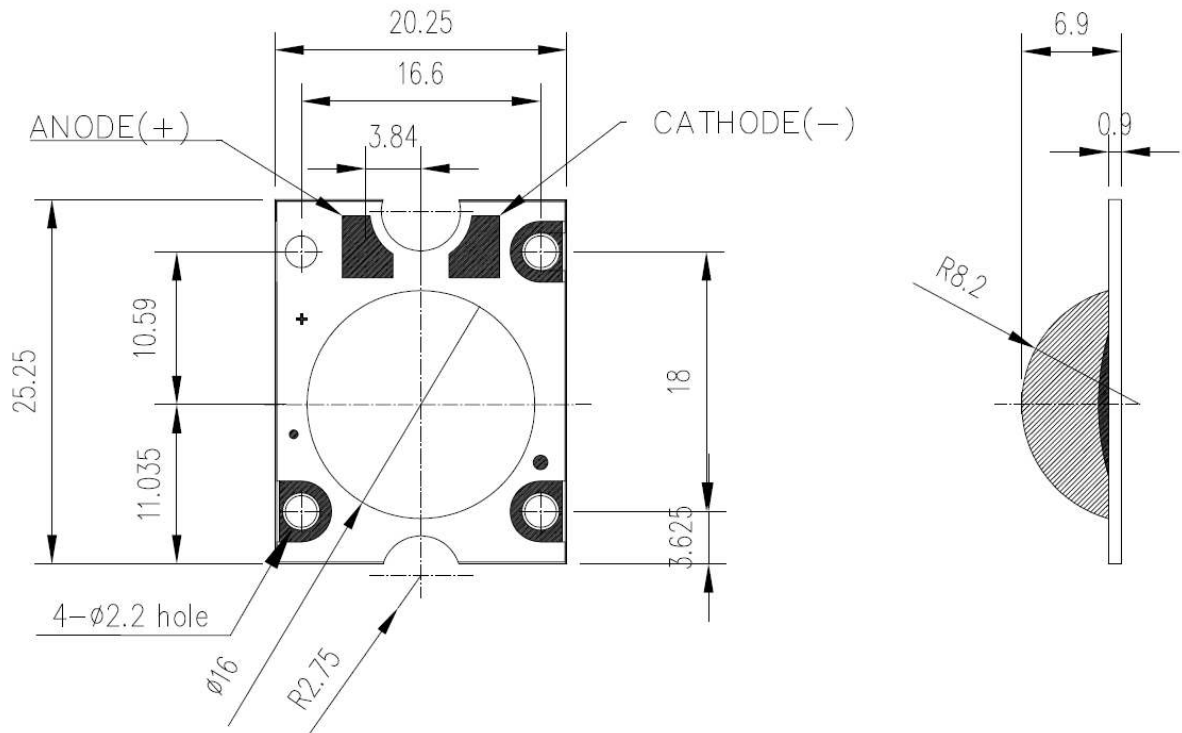

* This LED has built-in ESD protection device(s) connected in parallel to LED chip(s).

PRELIMINARY

6. Reliability Test Items and Conditions

1) Test Items


Test Items	Test Conditions	Test Hours/Cycles
Room Temperature life test	25°C, DC 460 mA	1,000 h
High Temperature humidity life test	85°C, 85% RH, DC 460 mA	1,000 h
High Temperature life test	85°C, DC 460 mA	1,000 h
Low Temperature life test	-40°C, DC 460 mA	1,000 h
High Temperature Storage	120°C	1,000 h
Low Temperature Storage	-40°C	1,000 h
Thermal Shock	-40 / 120°C, each 30 min	200 cycles
Temperature humidity Cycle On/Off test	-40 / 85°C, each 20 min, 100 min transfer Power On/off each 5 min, DC 460 mA	100 cycles
Reflow (Pb-Free)	Peak 260±5°C for 10 sec	3 times
ESD(HBM)	R1 : 10 MΩ , R2 : 1.5 kΩ , C : 100 pF	5 times (± 2 kV)
Surge	Line to Line	1 kV

2) Criteria for Failure

Item	Symbol	Test Condition [T _a = 25°C]	Limit	
			Min.	Max.
Forward Voltage	V _F	460 mA	L.S.L. × 0.9	U.S.L. × 1.1
Luminous flux	Im	460 mA	L.S.L. × 0.7	U.S.L. × 1.3

* U.S.L. : Upper Standard Level L.S.L. : Lower Standard Level

7. Label Structure

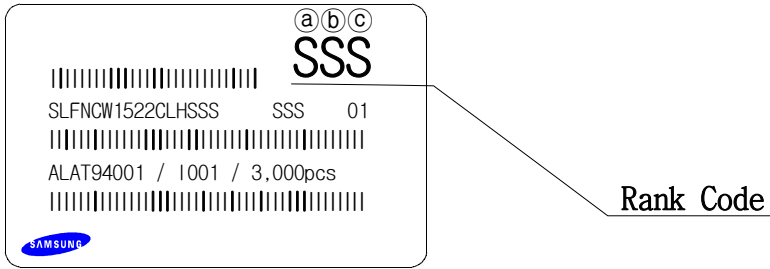


N.B) Denoted rank is the only example.

Rank Code

- Ⓐ : Forward Voltage (V_F) Rank (refer to page. 3)
- Ⓑ : Chromaticity Coordinate Rank (refer to page. 4)
- Ⓒ : Luminous Flux (Φ_V) Rank (refer to page. 3)

8. Lot Number

The Lot number is composed of the following characters

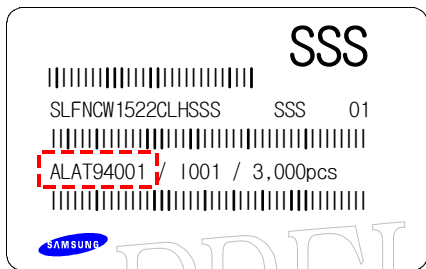

●◎◇◆□■△▲△ / |▲▲▲ / 3,000PCS


- : Production Site (S:SAMSUNG LED Suwon, G:Gosin China, A:Aprosystems)
- ◎ : L (LED)
- ◇ : Product State (A:Normality, B: Bulk, C:First Production, R:reproduction, S:Sample)
- ◆ : Year (S:2008, T:2009, U:2010, V:2011...)
- : Month (1 ~ 9, A~C)
- : Day (1 ~ 9, A, B ~ V)
- △ : SAMSUNG LED Product number (1 ~ 999)
- ▲ : Reel Number (1 ~ 999)

9. Tray Packing Structure

Reel




Aluminum Bag

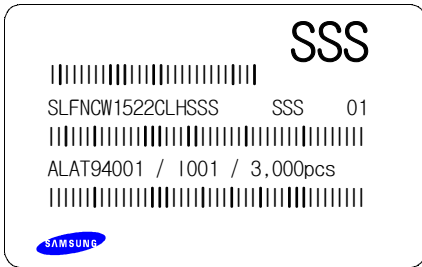


Material : Paper(SW3B(B))

TYPE	SIZE(mm)		
	a	b	c
13inch	335	335	335

① SIDE

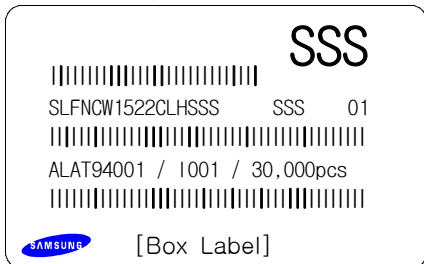

10. Aluminum Packing Bag

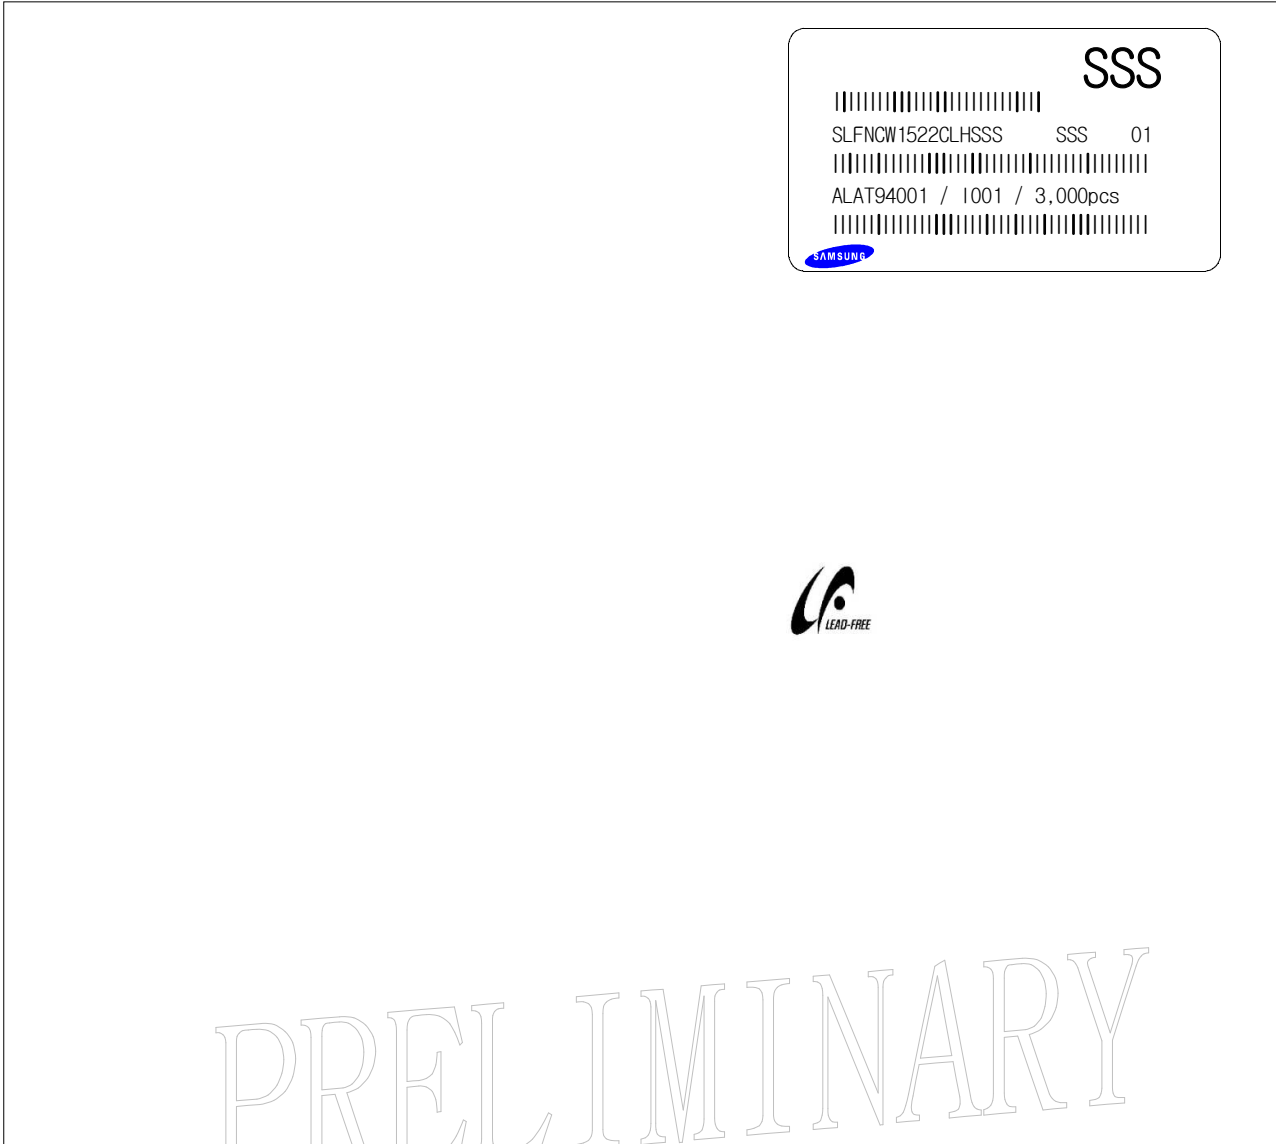

Silica gel & Humidity Indicator Card in Aluminum Bag



11. Precaution for use

- 1) For overcurrent-protection, customers are recommended to apply resistors connected in series with the LEDs to mitigate sudden change of the forward current caused by shift of the forward voltage.
- 2) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When cleaning is required, IPA is recommended as cleaning agent. Solvent-based cleaning agent such as Zestron^(R) may damage the silicone resins used in the device.
- 3) When the device is in operation, the forward current should be carefully determined considering the maximum ambient temperature and the corresponding junction temperature.
- 4) LEDs must be stored in a clean environment. If the LEDs are to be stored for 3 months or more after being shipped from Samsung LED, they should be packed with a nitrogen-filled container.
(Shelf life of sealed bags: 12 months, temp. 0~40°C, 20~70%RH)
- 5) After storage bag is open, device subject to soldering, solder reflow, or other high temperature processes must be:
 - a. Mounted within 168 hours (7 days) at an assembly line with a condition of no more than 30°C/60%RH.
 - b. Stored at <10% RH.
- 6) Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- 7) Devices require baking before mounting, if humidity card reading reaches 60% at 23±5°C.
- 8) Devices must be baked for 24hours at 65±5°C, if baking is required.
- 9) The LEDs are sensitive to the static electricity and surge current. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices.
Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.

