
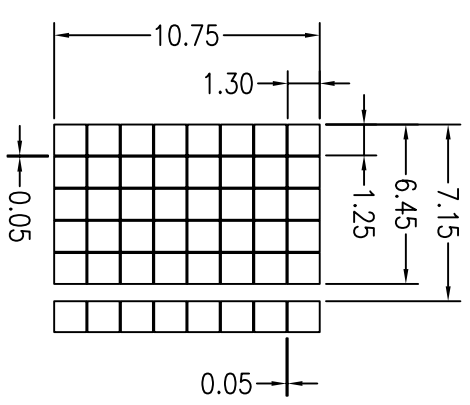
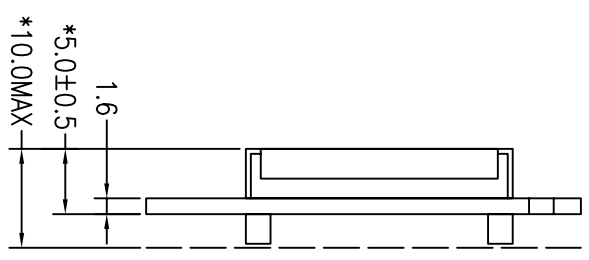


| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|------------------|-------------|
| A | First issue | AUG-20-2007 |
| B | Change TK Design | MAR-24-2008 |

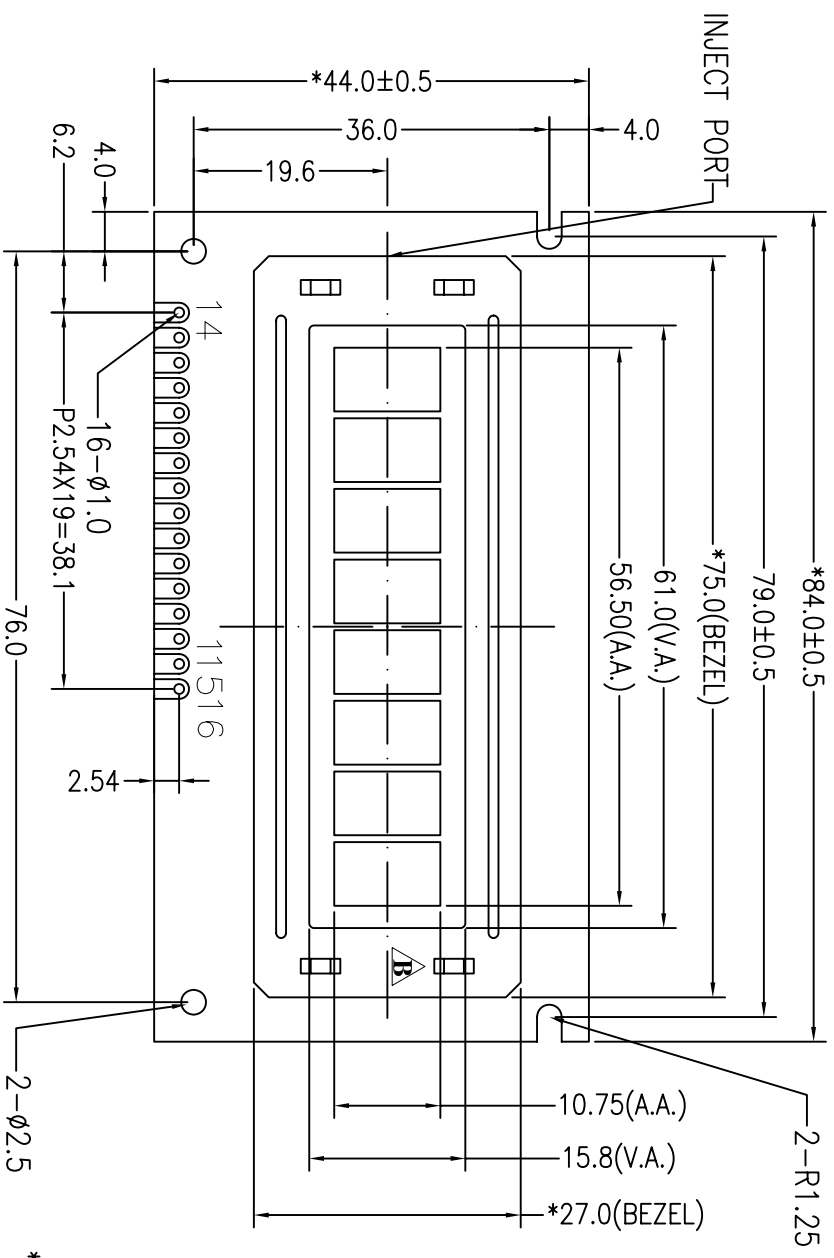

DOT SIZE
SCALE 2.5:1

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------|-----|-----|-----|-----|-----|-----|------|------|
| CONNECTION | VSS | VDD | V0 | RS | R/W | E | DB0 | DB1 |
| PIN | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| CONNECTION | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LEDK | LEDA |

Specification:

- 1). Driving: Duty:1/8, Bias:1/4, VLCD:4.8V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Yellow-Green/Positive/Reflective
- 4). Operating temp.: 0°C~+50°C
Storage temp.: -10°C~+60°C
- 5). IC:SPLC780D-001B-C (Or Compatible)
- 6). Dimensions with mark "*" are important,with mark "()" are referenced
- 7). All the raw materials are RoHS compliant

深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

SCALE: FIT 适应图面
比例

SHEET: 1 OF 1
页次

GENERAL TOL: ±0.3
公差

UNIT 单位
mm

DATE 日期

| | | | | | |
|-----------------------|--------|-------------------|-----------------------|-----------------|------|
| PART NO: 零件编号 | CD 结构图 | PROJECTION 三角法 | MODULE NUMBER 模组型号 | APPROVALS 签字 | DATE |
| FAV-ABC008001B01-R-00 | | | ABC008001B01-1A-NR | CHK: | |
| | | | | DWN: | |

DO NOT SCALE THIS DRAWING.