


## FEATURES:

- Universal Input range from 100V–240V.
- Suitable for High Power LEDs lighting application.
- Open Frame design for Standard E27 Lamp Holder.
- Power Factor: Pf > 0.5
- Protections: Short-Circuit / Over Heat

## Safety Approval:

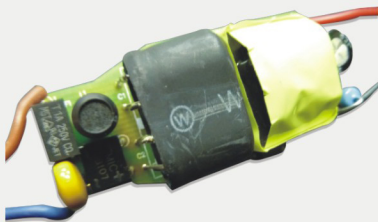



## SPECIFICATION:

Model No.		LD-CU3524-SD-E27	LD-CU7012-SD-E27
Input	Voltage Range (VAC)	100V–240Vac	
	Frequency Range (Hz)	50 Hz / 60 Hz	
	AC Current	0.1A@115VAC / 0.04A@230VAC	
	Leakage Current	<1mA / 240 Vac	
Output	Voltage Range (VDC)	3–24Vdc	3–12 Vdc
	Rated Current Range (mA)	350mA ± 6%	700mA ± 6%
	Rated Power (W)	7.8W Max	7W Max
	Efficiency (Typ.)	71%	64%
Environment	Operating Temp.	–20°C~50°C full load .	
	Operating Humidity	20% ~ 95% RH non-condensing.	
	Storage Temp. / Humidity	–20 ~ +80°C / 10% ~ 95% RH	
	Ambient Temp.	25°C at 240Vac	
Safety Approval	Safety Standards	CE EN55015, EN61347–2–13	

## Wiring Diagram:

## Mechanical Dimension:

PCB(55Lx26Wx25H mm)

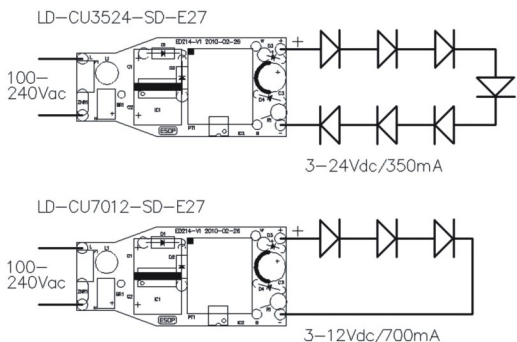

Note 1: Lamps must be wired in series, and total value of Vf should be under rated DC Voltage.

Note 2: Disconnect the mains supply before installing, Do not turn on/off from output port.

Note 3: Parameter measured at full load 25°C ambient temperature.

Note 4: Two years warranty