



OUTLINE DIMENSIONS

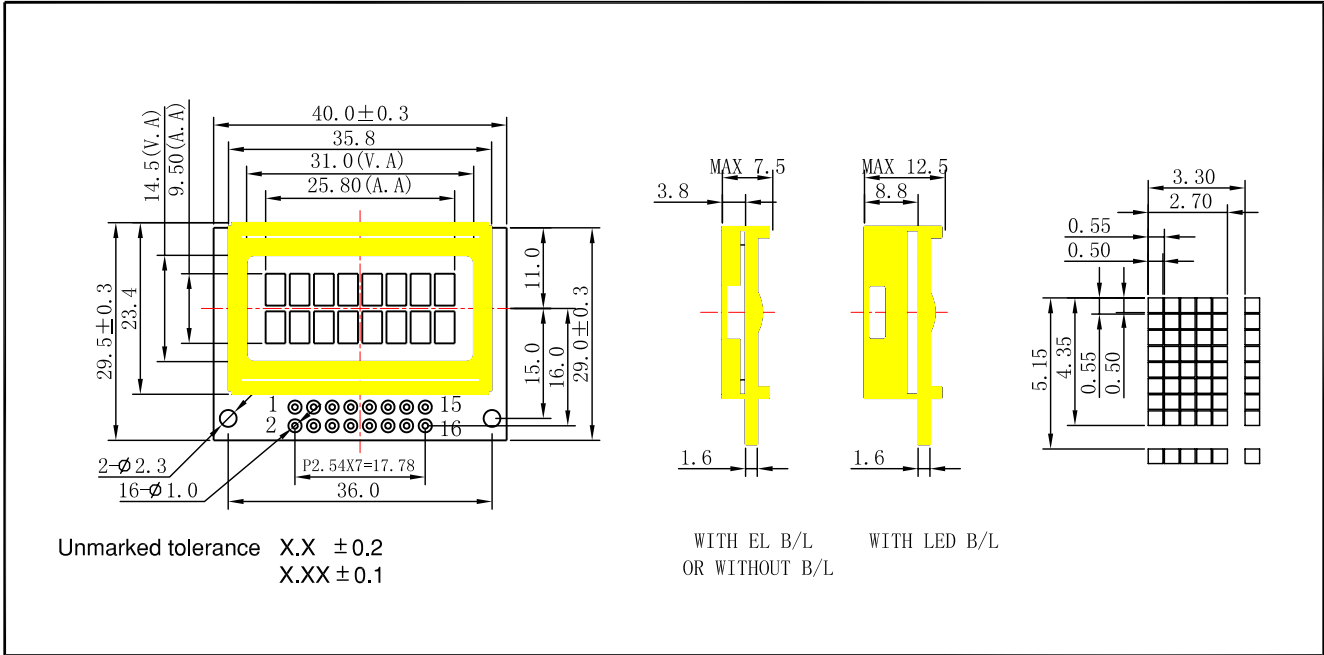

BLOCK DIAGRAM & POWER SUPPLY

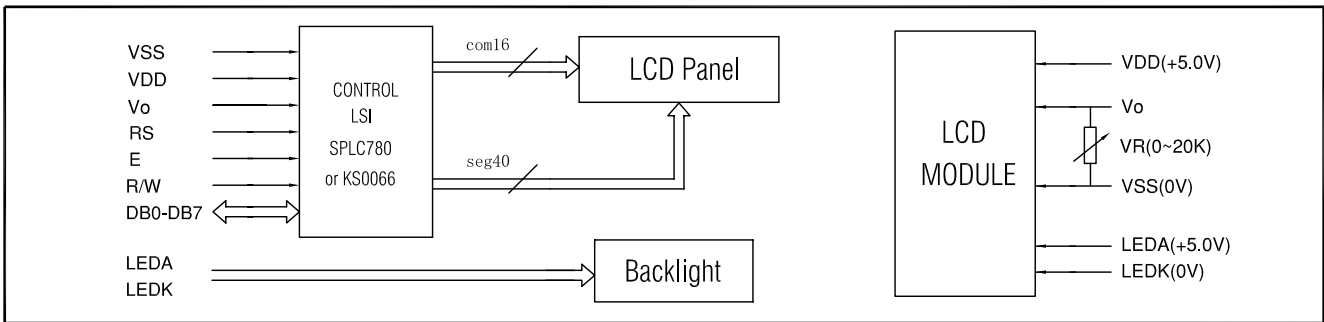

MECHANICAL SPECIFICATIONS & FEATURE

Item	Normal Dimensions(mm)	FEATURE	
Module Size (W*H*T)	40.0x29.5x7.5/12.5	LCD Type	STN、TN、HTN、FSTN
View Area (W*H)	31.0x14.5	LCD Colour	STN:Yellow-Green、Gray Other:Gray
Character Pitch(W*H)	3.30x5.15	View Angle	6 O'clock、12 O'clock
Character Size(W*H)	2.7x4.35	Display Type	Positive Type、Negative Type
Character Font	5x8	Rear polarizer	Transmissive、Reflective、Transflective
Dot Pitch (W*H)	0.55x0.55	Operating Temperature	0°C ~ 50°C、-20°C ~ 70°C
Dot Size (W*H)	0.50x0.50	Backlight	LED:Yellow EL:Green、Blue-Green、Blue Without

ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25°C	---	5.0	---	V
Operating Voltage for LCD	Vlcd	Ta=25°C	---	4.5	---	V
Supply Current	Idd	Ta=25°C, Vdd=5.0V	---	2.0	3.0	mA
Supply Current for Backlight	If	Ta=25°C, Vf=4.5V	---	60	---	mA

INTERFACE PIN CONNECTIONS

Pin No	Symbol	Level	Description	Pin No	Symbol	Level	Description
1	R/W	H/L	Read/write selection (H:Read,L:Write)	9	DB0	H/L	Data Bus lines
2	E	H/H—L	Enable signal for LCM	10	DB7	H/L	
3	RS	H/L	Register selection H:Data register, L:Instruction register	11	DB1	H/L	
				12	DB6	H/L	
4	Vo	--	Power supply for LCD drive	13	DB2	H/L	
5	VDD	--	Power supply for Logic	14	DB5	H/L	
6	VSS	--	Ground for Logic	15	DB3	H/L	
7	LEDA	--	Power supply for Backlight(+)	16	DB4	H/L	
8	LEDK	--	Power supply for Backlight(+)	---	---	---	---

REMARK

Negative type LCD colour: Blue
CGROM font option: English、Japanese、Russian、etc
Old NO.:HY-0802B Series