

### Features

- ✧ Low power loss, high efficiency
- ✧ High current capability, Low VF
- ✧ High reliability
- ✧ High surge current capability
- ✧ Exitaxial construction
- ✧ Guard-ring for transient protection
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode



### Mechanical Data

- ✧ Cases: Molded plastic DO-41
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10 seconds
- ✧ Weight: 0.33 grams

### Ordering Information (example)

Part No.	Package	Packing	INNER TAPE	Packing code	Packing code (Green)	Manufacture code
1N5817	DO-41	3K / AMMO box	52mm	A0	A0G	Y1

Note : Detail please see "Ordering Information(detail, example)" below.

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	1N5817	1N5818	1N5819	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30			A
Maximum Instantaneous Forward Voltage (Note 1) @ 1 A	$V_F$	0.45	0.550	0.600	V
Maximum DC Reverse Current @ $T_A=25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100\text{ }^\circ\text{C}$	$I_R$	1 10			mA mA
Typical Junction Capacitance (Note 2)	$C_j$	55			pF
Typical Thermal Resistance	$R_{\theta JA}$ $R_{\theta JC}$	100 45			$^\circ\text{C/W}$
Operating Temperature Range	$T_J$	- 55 to + 125			$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	- 55 to + 150			$^\circ\text{C}$

Note 1: Pulse Test With PW=300 usec, 1% Duty Cycle

Note 2: Measure at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES (1N5817 THRU 1N5819)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

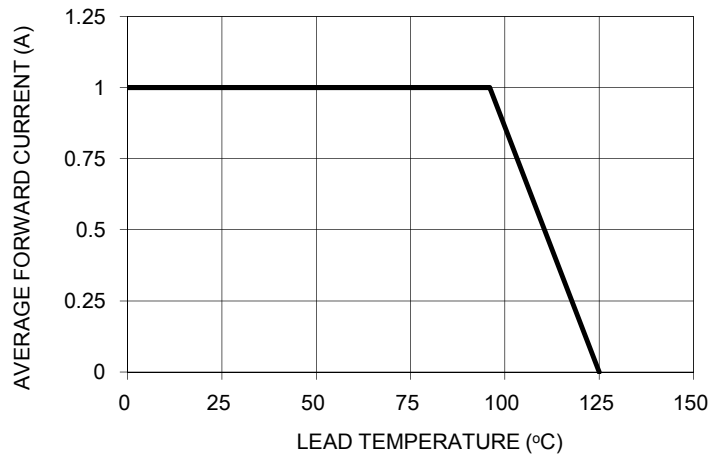


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

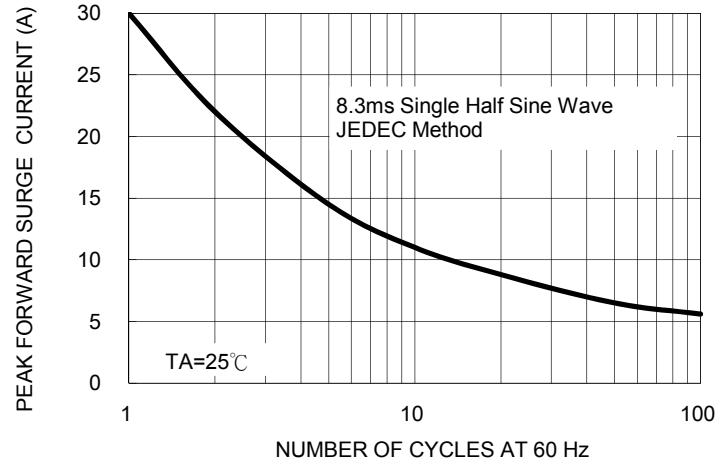


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

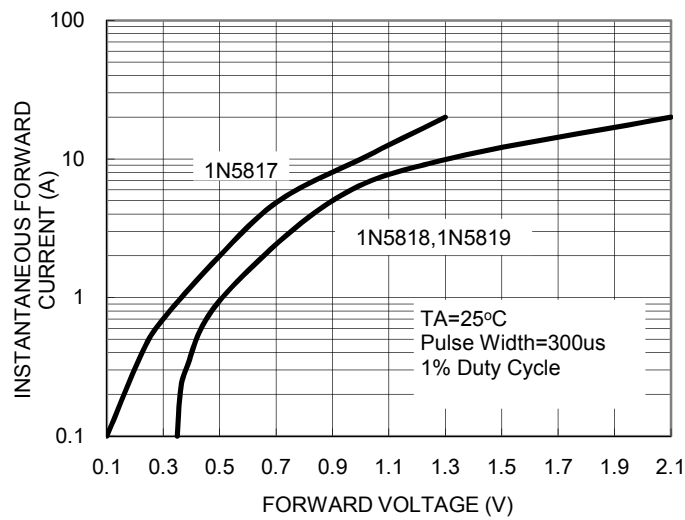


FIG. 4- TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

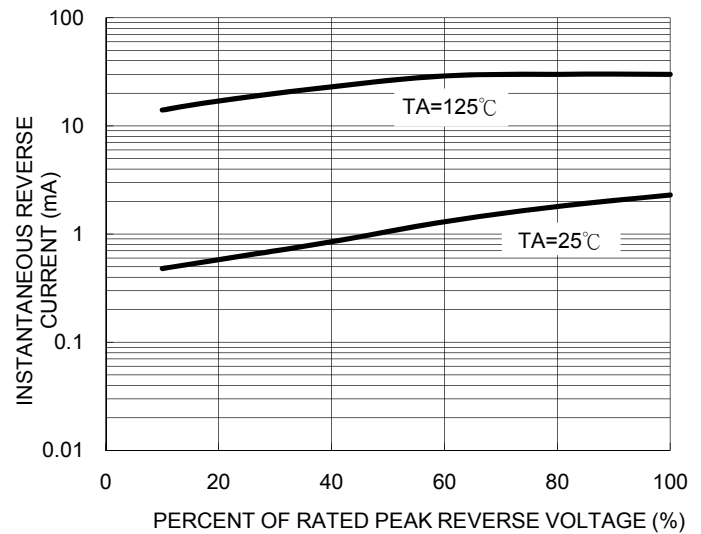


FIG. 5- TYPICAL JUNCTION CAPACITANCE


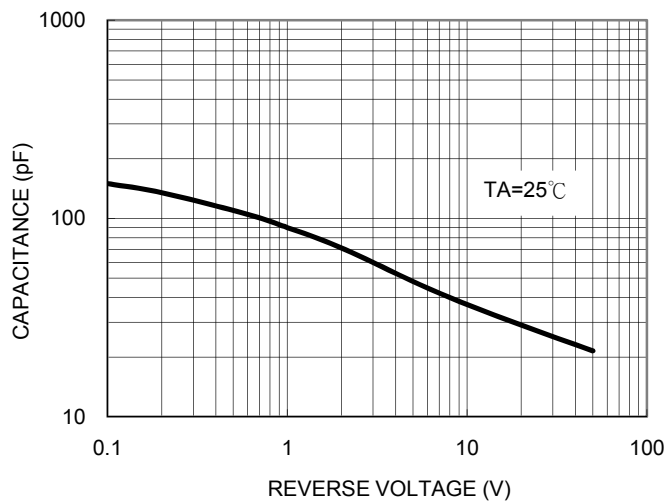


FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

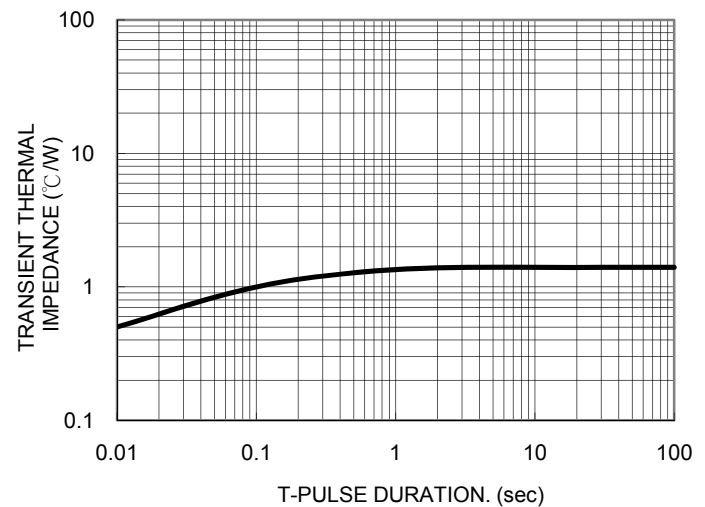


**Ordering information (Detail, example)**

Part No.	Package	Packing	INNER TAPE	Packing code	Packing code (Green)	Manufacture code (Note 2)
1N581x (Note 1)	DO-41	3K / AMMO box	52mm	A0	A0G	
	DO-41	3K / AMMO box	26mm	A1	A1G	
	DO-41	5K / 13" Reel	52mm	R0	R0G	
	DO-41	5K / 13" Reel (Reverse)	52mm	R1	R1G	
	DO-41	1K / Bulk packing		B0	B0G	
	DO-41	3K / AMMO box	52mm	A0	A0G	Y1
	DO-41	3K / AMMO box	26mm	A1	A1G	Y1
	DO-41	5K / 13" Reel	52mm	R0	R0G	Y1
	DO-41	5K / 13" Reel (Reverse)	52mm	R1	R1G	Y1
	DO-41	1K / Bulk packing		B0	B0G	Y1


Note 1: "x" is Device Code from "7" thru "9".

Note 2: Manufacture special control, if empty means no special control requirement.

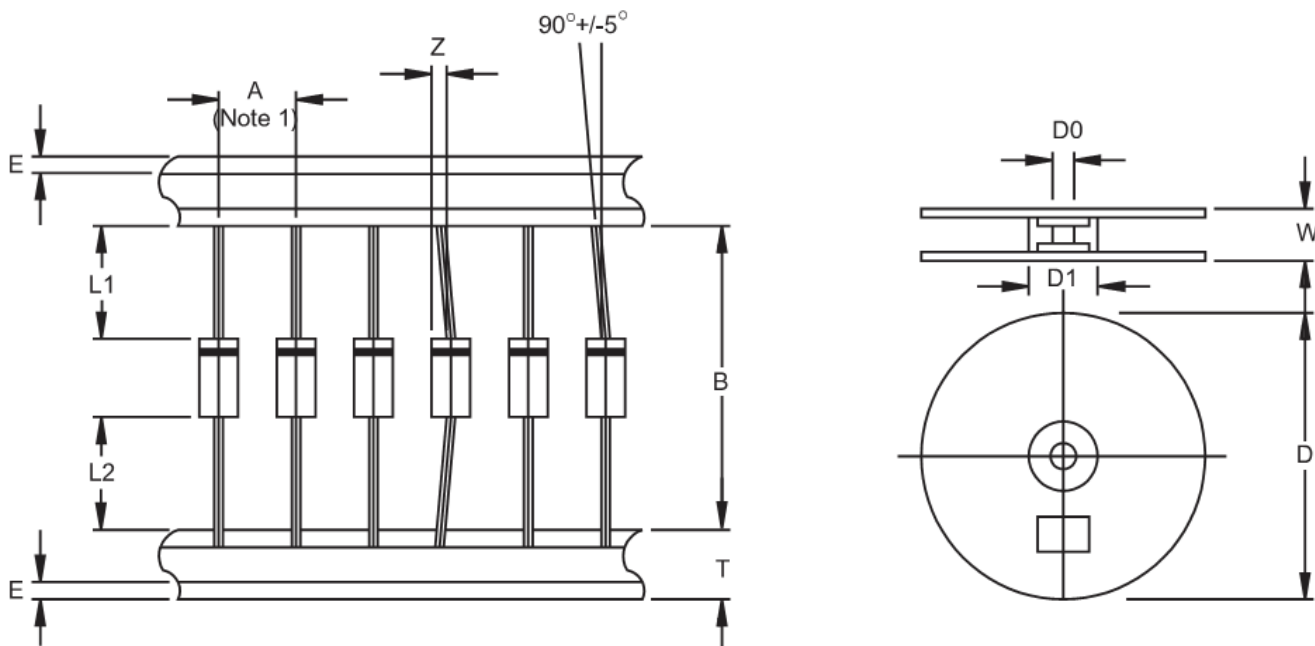**AXIAL LEAD TAPING SPECIFICATIONS**


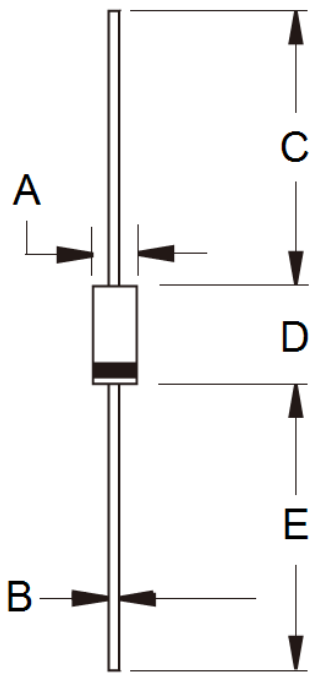
Outline	A	B	Z	T	E	L1-L2	D	D1	D0	W
	±0.5	±1.5	MAX	±0.4	MAX	MAX		±0.3	±0.4	±1.0
DO-41	5	26	1.2	6	0.8	1	330	85.7	16.6	76
DO-41	5	52.4	1.2	6	0.8	1	330	85.7	16.6	76

Unit (mm)

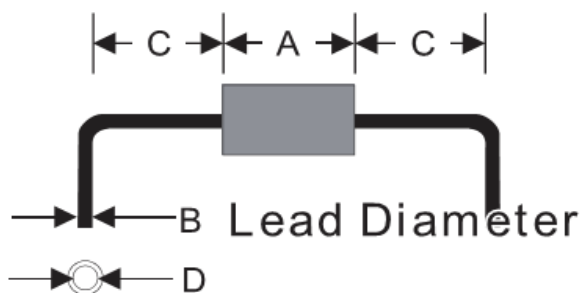**Suggested Mounting Hole Rule**


Symbol	Unit(mm)
A	5.1
B	0.8
C	3.0
D	1.2

**Dimensions**



DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	2.00	2.70	0.079	0.106
B	0.71	0.86	0.028	0.034
C	25.40	-	1.000	-
D	4.20	5.20	0.165	0.205
E	25.40	-	1.000	-

**Marking Diagram**



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code