

Features

- ✧ UL Recognized File # E-326243
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guard-ring for overvoltage protection
- ✧ High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode



Mechanical Data

- ✧ Case: ITO-220AC molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs, max
- ✧ Weight: 1.88 grams

Ordering Information(example)

Part No.	Package	Packing	Packing code	Packing code (Green)
MBRF2035	ITO-220AC	50 / TUBE	C0	C0G

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	MBRF 2035	MBRF 2045	MBRF 2050	MBRF 2060	MBRF 2090	MBRF 20100	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	35	45	50	60	90	100	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	63	70	V
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	90	100	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	20						A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz)	I_{FRM}	40						A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150						A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1		0.5				A
Maximum Instantaneous Forward Voltage (Note 2) $I_F=20A, T_A=25^\circ C$ $I_F=20A, T_A=125^\circ C$	V_F	0.75		0.82		0.95		V
		0.65		0.72		0.87		
Maximum Reverse Current @ Rated V_R $T_A=25^\circ C$ $T_A=125^\circ C$	I_R	0.2				0.1		mA
		15		10		5		
Voltage Rate of Change (Rated V_R)	dV/dt	10000						V/us
Typical Junction Capacitance	C_j	560				420		pF
Typical Thermal Resistance	$R_{\theta JC}$	3						°C/W
Operating Temperature Range	T_J	- 55 to + 150						°C
Storage Temperature Range	T_{STG}	- 55 to + 150						°C

Note 1: 2.0uS Pulse Width, f=1.0KHz

Note 2: Pulse Test : 300uS Pulse Width, 1% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (MBRF2035 THRU MBRF20100)

FIG. 1 FORWARD CURRENT DERATING CURVE

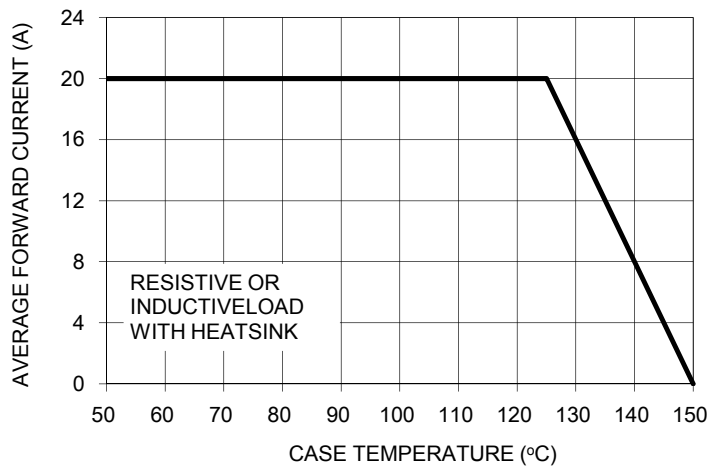


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

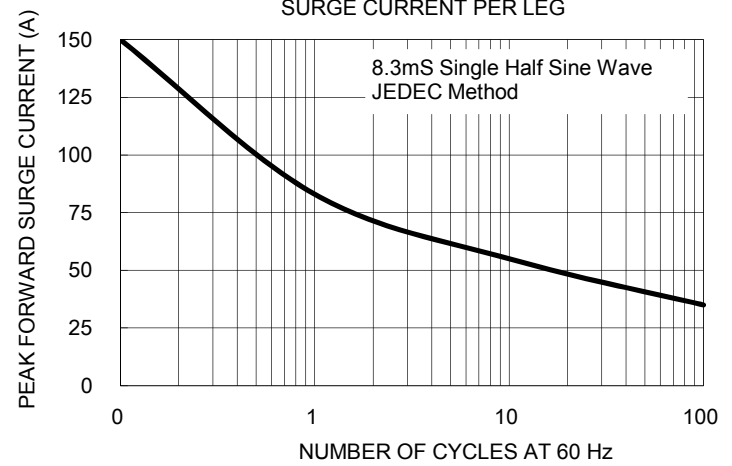


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

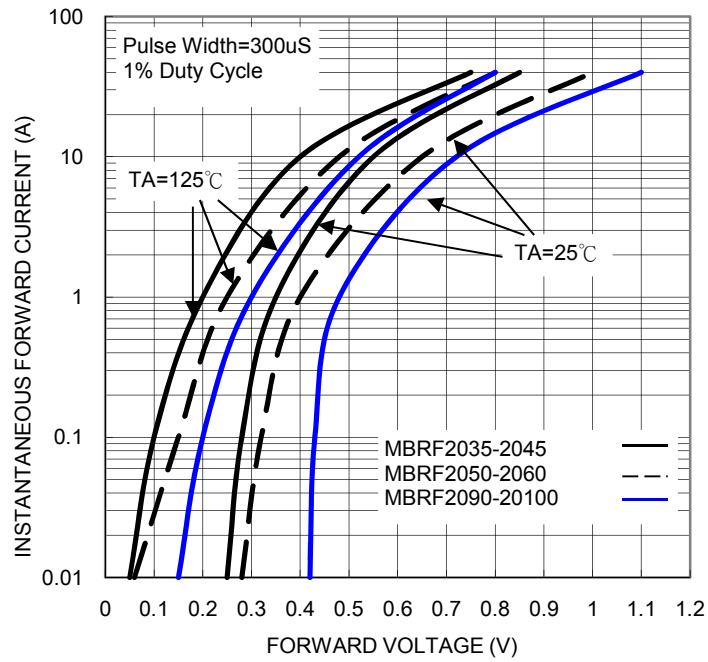


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

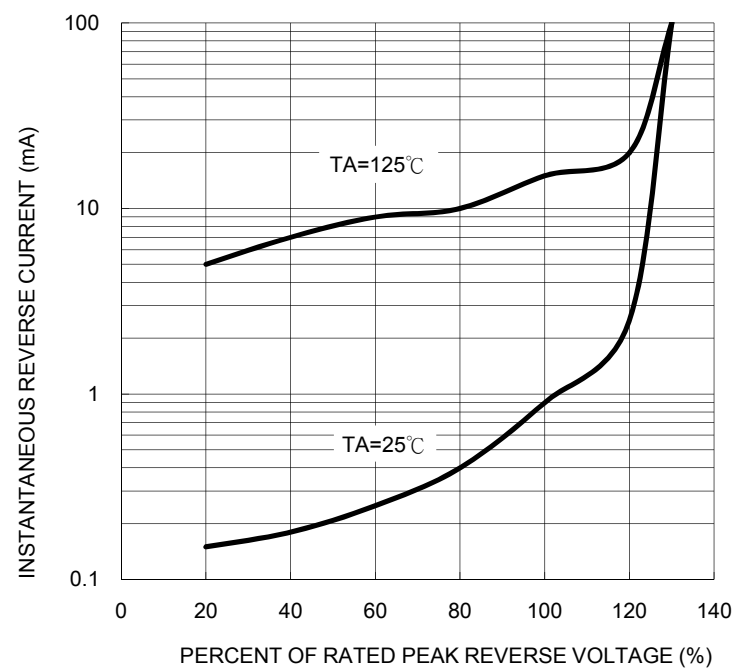


FIG. 5 TYPICAL JUNCTION CAPACITANCE PER LEG


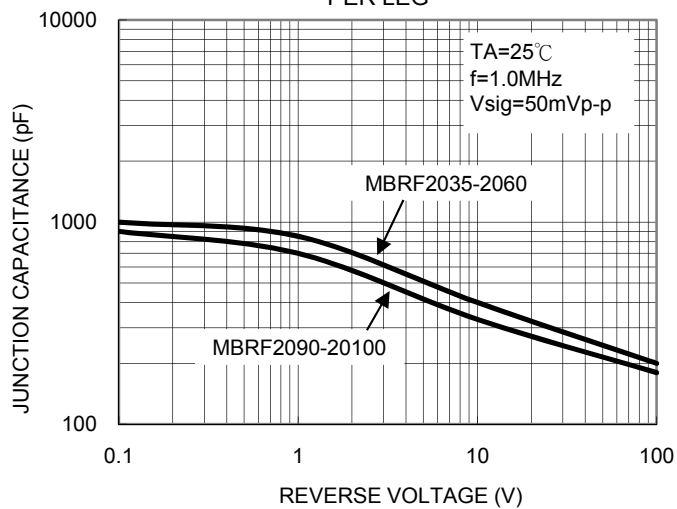


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

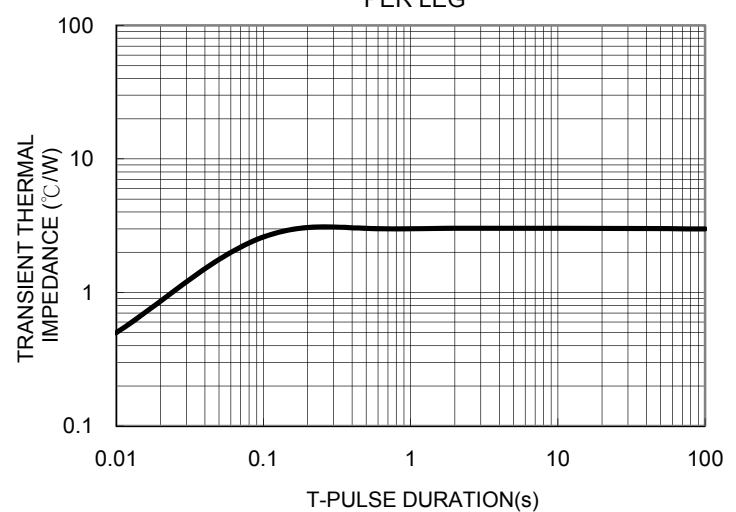


Ordering information


Part No.	Package	BULK Packing	Packing code	Packing code (Green)
MBRF20xx	ITO-220AC	50 / TUBE	C0	C0G

Note: "xx" is Device Code from "35" thru "100".

Dimensions

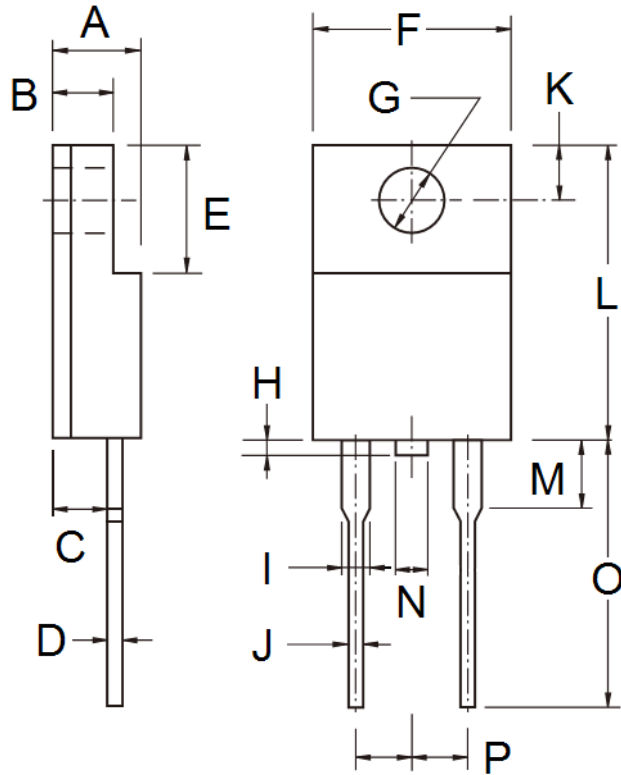

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.10	0.098	0.122
C	2.30	2.90	0.091	0.114
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	-	1.60	-	0.063
I	0.95	1.45	0.037	0.057
J	0.50	0.90	0.020	0.035
K	2.40	3.20	0.094	0.126
L	14.80	15.50	0.583	0.610
M	-	4.10	-	0.161
N	-	1.80	-	0.071
O	12.60	13.80	0.496	0.543
P	4.95	5.20	0.195	0.205

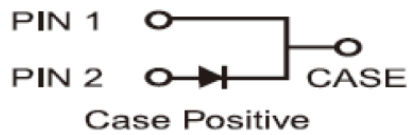

Marking Diagram



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code