


TS6B01G - TS6B07G

Single Phase 6.0 AMPS. Glass Passivated Bridge Rectifiers

TS4B

Features

- ✧ UL Recognized File # E-326243
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction
- ✧ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✧ Surge overload rating to 150 amperes peak
- ✧ High case dielectric strength of 2000V_{RMS}
- ✧ High temperature soldering guaranteed:
260°C / 10 seconds / 0.375"(9.5mm) lead length at 5 lbs (2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

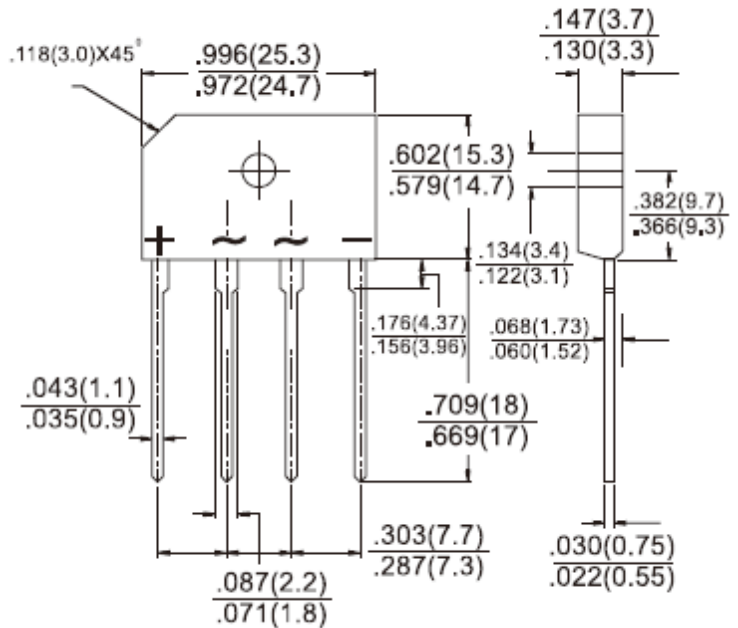


Mechanical Data

- ✧ Case: Molded plastic
- ✧ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✧ Weight: 4 grams
- ✧ Mounting torque : 5 in. lbs. Max.

Dimensions in inches and (millimeters)

Marking Diagram



- TS6B0XG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	TS6B 01G	TS6B 02G	TS6B 03G	TS6B 04G	TS6B 05G	TS6B 06G	TS6B 07G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	6							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	150							A
Maximum Instantaneous Forward Voltage @ 3 A (Note 1) @ 6 A	V _F	1.0 1.1							V
Maximum DC Reverse Current @ T _A =25 °C at Rated DC Blocking Voltage @ T _A =125 °C	I _R	5 500							uA uA
Typical Thermal Resistance (Note 2)	R _{θJC}	1.5							°C/W
Operating Temperature Range	T _J	- 55 to + 150							°C
Storage Temperature Range	T _{STG}	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2 : Mounted on 2" x 3" x 0.25" Al-Plate Heatsink.

RATINGS AND CHARACTERISTIC CURVES (TS6B01G THRU TS6B07G)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

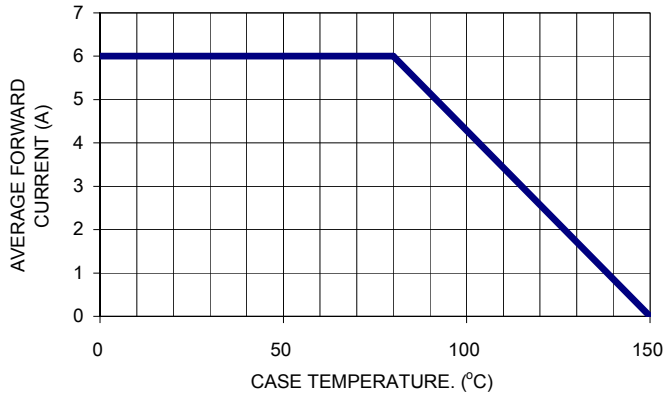


FIG. 2- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

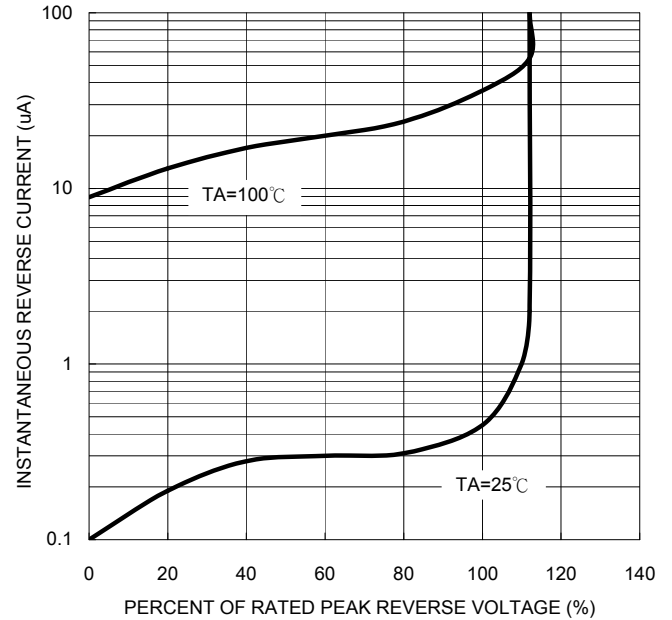


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

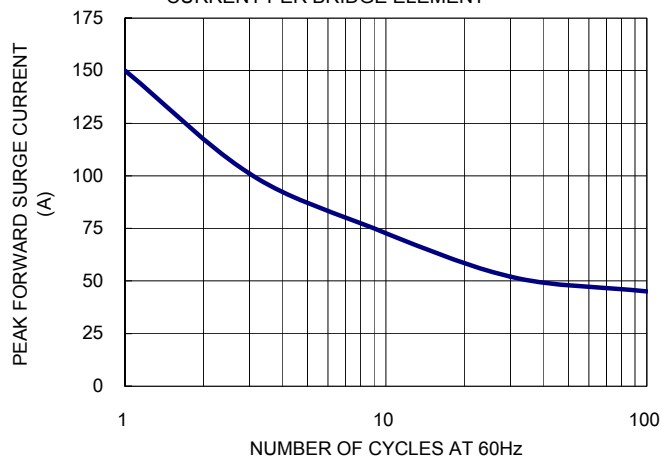


FIG. 4- TYPICAL JUNCTION CAPACITANCE

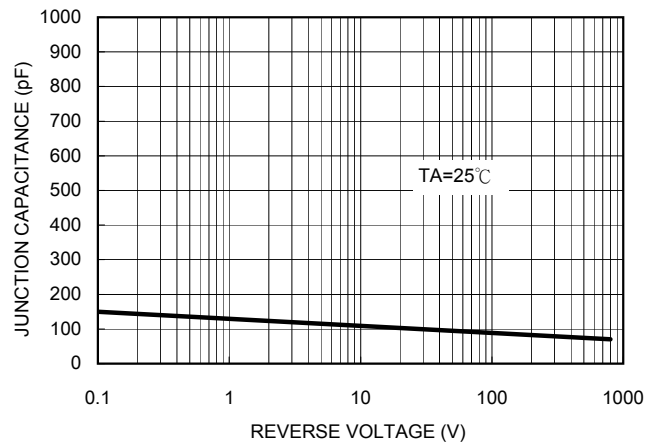


FIG. 5- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

