


**Features**

- ◇ Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistor (see equivalent circuit).
- ◇ The bias resistors consist of thin -film resistors with complete isolation to allow negative biasing of the input.
- ◇ They also have the advantage of almost completely eliminating parasitic effects.
- ◇ Only the on/off conditions need to be set for operation, marking device design easy.
- ◇ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code.

Equivalent Circuit

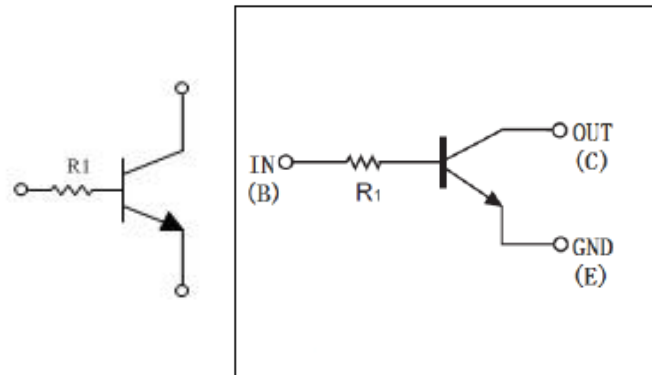

**Ordering Information (example)**

Part No.	Package	Packing	Packing code	Packing code (Green)	Manufacture code	Marking
DTC114 TM	SOT-723	8K / 7" Reel	RM	RMG	M0	04

Note : Detail please see "Ordering Information(detail, example)" below

**Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified.

**Maximum Ratings**

Parameter	Symbol	Value				Units
		TM	TE	EUA / ECA	ESA	
Power Dissipation	PD	100	150	200	300	mW
Collector-Base Voltage	$V_{CBO}$	50				V
Collector-Emitter Voltage	$V_{CEO}$	50				V
Emitter-Base Voltage	$V_{EBO}$	5				V
Collector Current -Continuous	$I_C$	100				mA
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 150				°C

Notes: 1. Valid provided that electrodes are kept at ambient temperature

**Electrical Characteristics**

Parameter	Symbol	Min	Typ	Max	Condition	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	50			$I_C=50\mu A, I_E=0$	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	50			$I_C=1mA, I_B=0$	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	5			$I_E=50\mu A, I_C=0$	V
Collector cut-off current	$I_{CBO}$			0.5	$V_{CB}=50V, I_E=0$	$\mu A$
Emitter cut-off current	$I_{EBO}$			0.5	$V_{EB}=4V, I_C=0$	$\mu A$
DC Current Gain	$h_{FE}$	100	300	600	$V_{CE}=5V, I_C=1mA$	
Collector-emitter saturation voltage	$V_{CE(sat)}$			0.3	$I_C=10mA, I_B=1mA$	V
Transition frequency	$f_T$	250			$V_{CE}=10V, I_E=-5mA, f=100MHz$	MHz
Input resistor	$R_1$	7	10	13		K $\Omega$


**Ordering information (Detail, example)**

Part No.	Package	Packing	Packing code	Packing code (Green)	Manufacture code (Note)	Marking
DTC114 TM	SOT-723	8K / 7" Reel	RM	RMG		04
DTC114 TE	SOT-523	3K / 7" Reel	RN	RNG		04
DTC114 TUA	SOT-323	3K / 7" Reel	RV	RVG		04
DTC114 TCA	SOT-23	3K / 7" Reel	RU	RUG		04
DTC114 TSA	TO-92S	3K / Box(Ammo)	A3	A3G		
DTC114 TM	SOT-723	8K / 7" Reel	RM	RMG	M0	04
DTC114 TE	SOT-523	3K / 7" Reel	RN	RNG	M0	04
DTC114 TUA	SOT-323	3K / 7" Reel	RV	RVG	M0	04
DTC114 TCA	SOT-23	3K / 7" Reel	RU	RUG	M0	04
DTC114 TSA	TO-92S	3K / Box(Ammo)	A3	A3G	M0	

Note : Manufacture special control, if empty means no special control requirement.


**Dimensions**

**TO-92S**

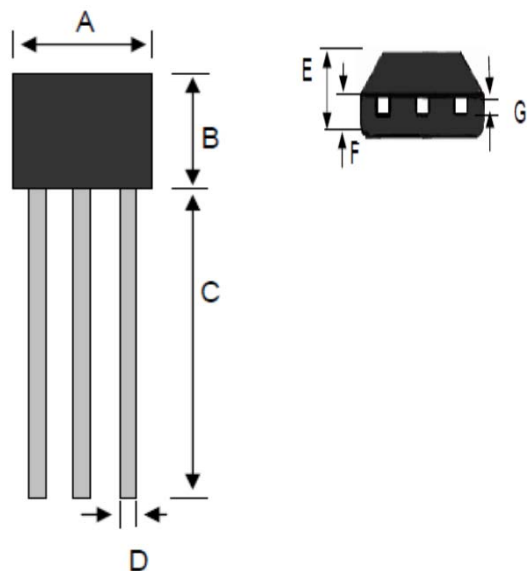


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	3.85	4.15	0.15	0.16
B	3.01	3.31	0.12	0.13
C	15.10	15.50	0.59	0.61
D	0.38	0.55	0.01	0.02
E	1.42	1.62	0.06	0.06
F	0.66	0.86	0.03	0.03
G	0.36	0.51	0.01	0.02

**SOT-23**

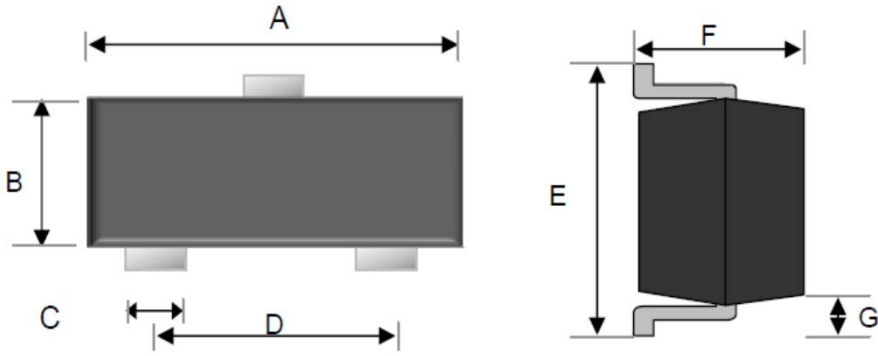


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.11	0.12
B	1.20	1.40	0.05	0.06
C	0.30	0.50	0.01	0.02
D	1.80	2.00	0.07	0.08
E	2.25	2.55	0.09	0.10
F	0.90	1.20	0.04	0.04
G	0.550 REF		0.022 REF	

**SOT-323**

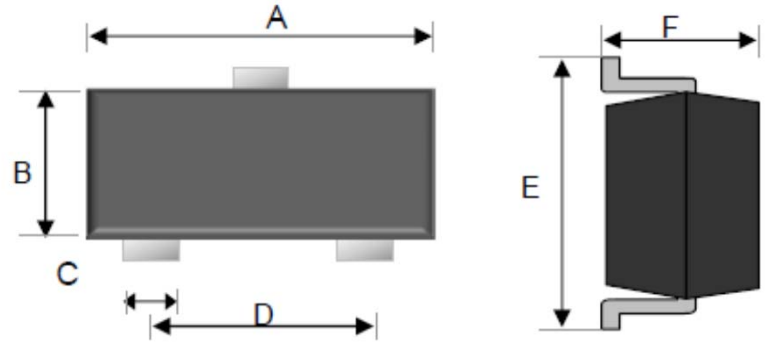


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.90	2.10	0.07	0.08
B	1.15	1.35	0.05	0.05
C	0.25	0.35	0.01	0.01
D	1.20	1.40	0.05	0.06
E	2.00	2.20	0.08	0.09
F	0.80	1.00	0.03	0.04

**SOT-523**

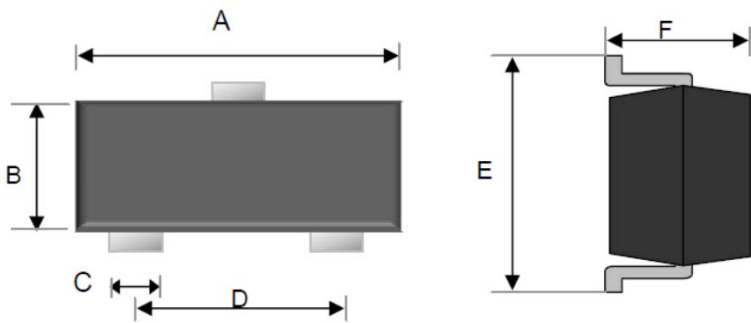

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.50	1.70	0.06	0.07
B	0.70	0.80	0.03	0.03
C	0.25	0.35	0.01	0.01
D	0.90	1.10	0.04	0.04
E	1.50	1.70	0.06	0.07
F	0.70	0.90	0.03	0.04

**SOT-723**

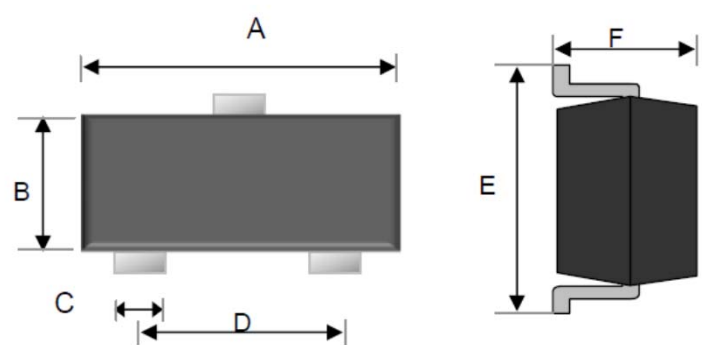

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.15	1.25	0.05	0.05
B	0.75	0.85	0.03	0.03
C	0.17	0.27	0.01	0.01
D	0.8 TYP		0.31 TYP	
E	1.15	1.25	0.05	0.05
F		0.50		0.02