


## Package information - DIL8

Dual in-line, 8 pin package

Package outline

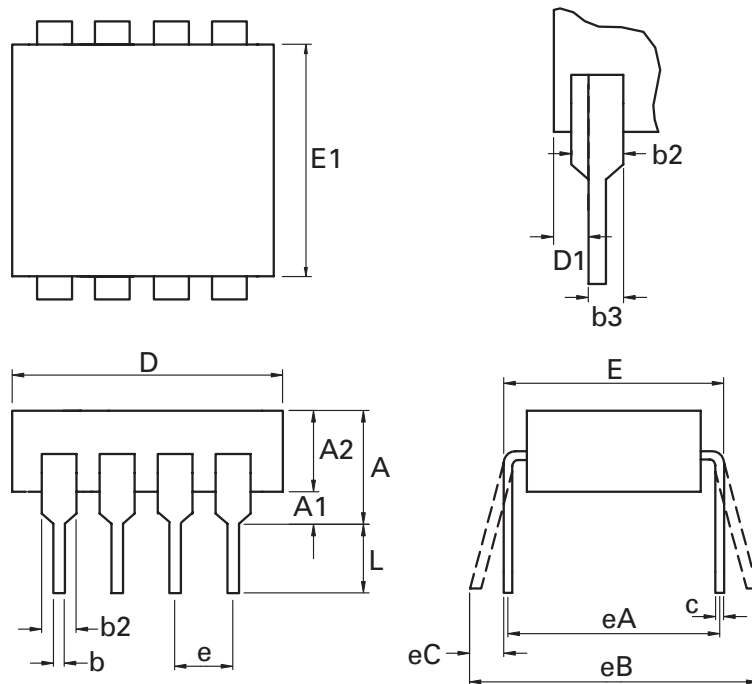

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min	Max	Min	Max		Min	Max	Min	Max
A	-	0.210	-	5.33	D1	0.005	-	0.13	-
A1	0.015	-	0.38	-	E	0.300	0.325	7.62	8.26
A2	0.115	0.195	2.92	4.95	E1	0.240	0.280	6.10	7.11
b	0.014	0.022	0.36	0.56	e	0.100 BSC		2.54 BSC	
b2	0.045	0.070	1.14	1.78	eA	0.300 BSC		7.62 BSC	
b3	0.030	0.045	0.76	1.14	eB	-	0.430	-	10.92
c	0.008	0.014	0.20	0.36	eC	0.000	0.060	0.00	1.52
D	0.355	0.400	9.02	10.16	L	0.115	0.150	2.92	3.81

Note: Controlling dimensions are in inches. Approximate dimensions are provided in millimeters

### Taping specification

Dual inline devices (DIL8, DIL14, DIL16 and DIL20) are provided in tubes.

# Package information - DIL8

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.