

Features

- ✧ UL Recognized File # E-326243
- ✧ Dual rectifier construction, positive center-tap
- ✧ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low VF
- ✧ High surge reliability
- ✧ Epitaxial construction
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ High temperature soldering guaranteed:
260°C/10 seconds, 0.17"(4.3mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode



Mechanical Data

- ✧ Cases: JEDEC TO-3P/TO-247AD molded plastic
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Weight: 6.12 grams

Ordering Information (example)

Part No.	Package	Packing	Packing code	Packing code (Green)
SR3020PT	TO-3P	30 / TUBE	C0	C0G

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	SR 3020 PT	SR 3030 PT	SR 3040 PT	SR 3050 PT	SR 3060 PT	SR 3090 PT	SR 30100 PT	SR 30150 PT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	30								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	300								A
Maximum Instantaneous Forward Voltage (Note 1) @ 15 A	V_F	0.55		0.70		0.90		1.00		V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	1.0				0.5				mA
		20		15		10			mA	
Typical Junction Capacitance (Note 2)	C_j	750		500		340			pF	
Typical Thermal Resistance Per Leg	$R_{\theta JC}$	1.5								°C/W
Operating Junction Temperature Range	T_J	- 55 to + 125				- 55 to + 150				°C
Storage Temperature Range	T_{STG}	- 55 to + 150								°C

Note 1 : 300 us Pulse Width, 2% Duty Cycle

Note 2 : Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (SR3020PT THRU SR30150PT)

FIG. 1- FORWARD CURRENT DERATING CURVE

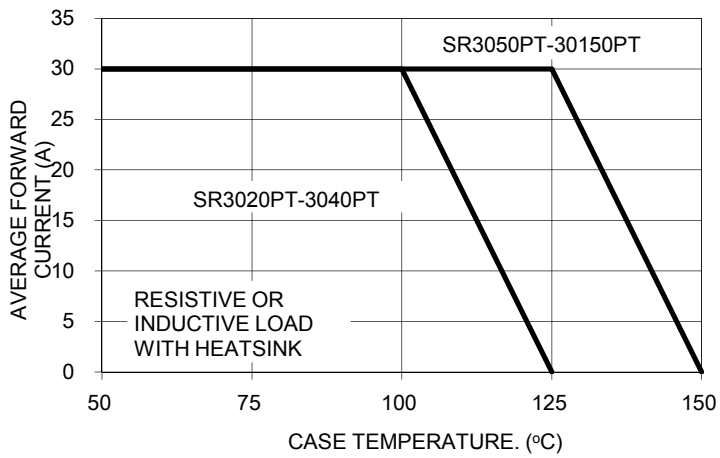


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

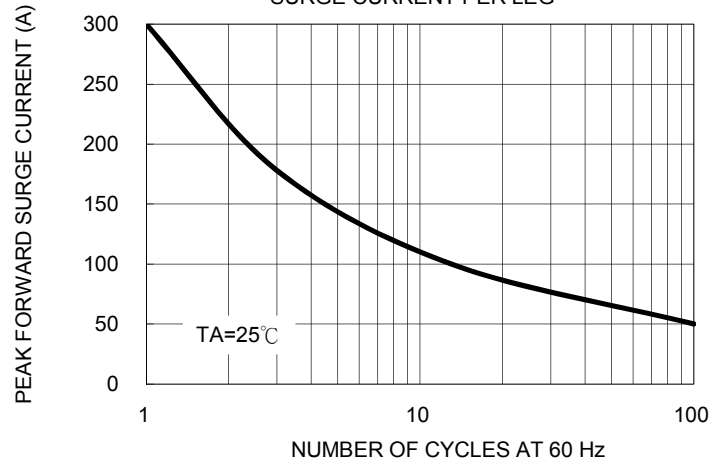


FIG. 3- TYPICAL FORWARD CHARACTERISTICS PER LEG

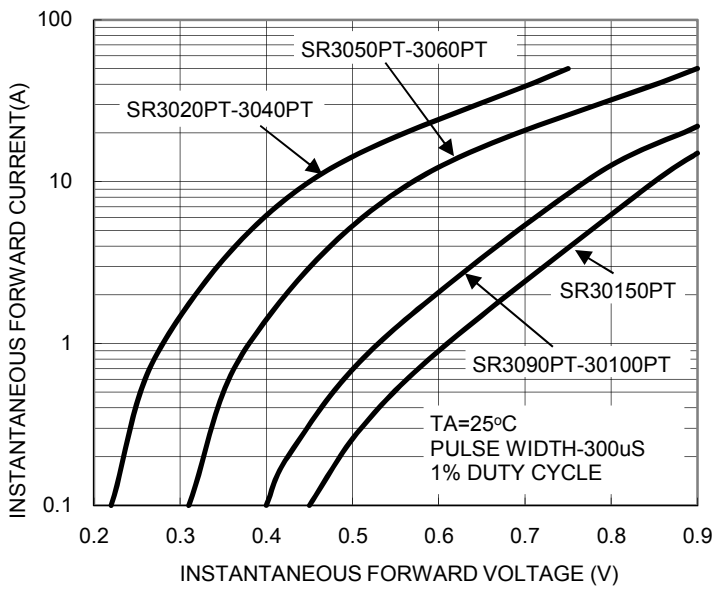


FIG. 4- TYPICAL REVERSE CHARACTERISTICS PER LEG

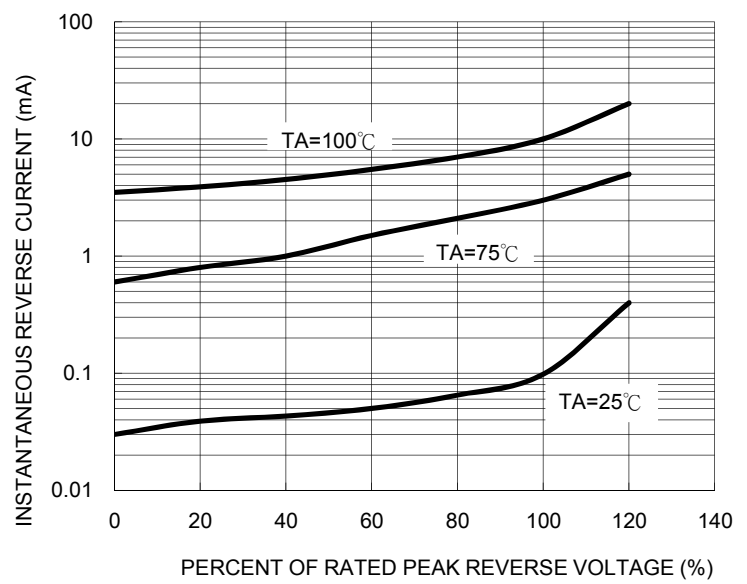


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG


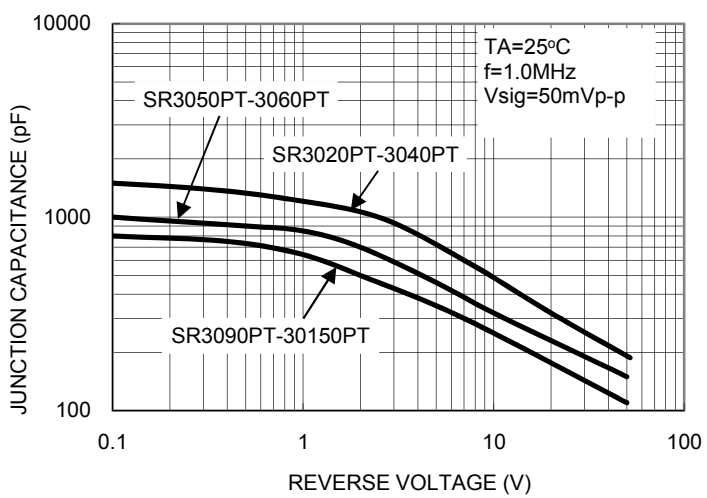


FIG. 6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

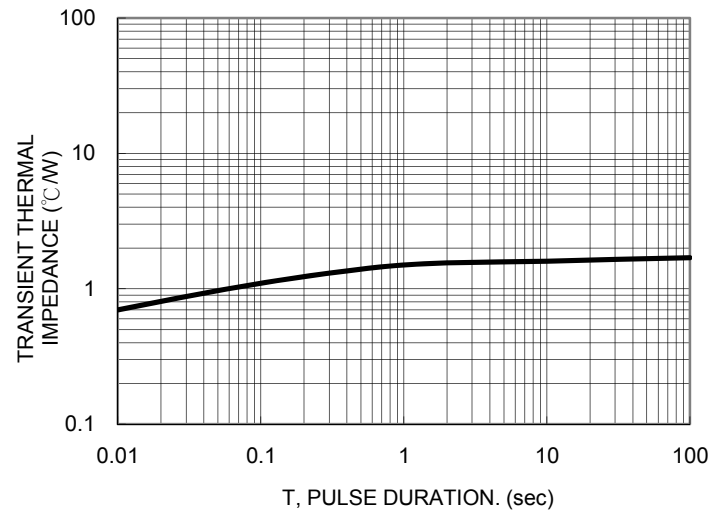


Ordering information


Part No.	Package	Packing	Packing code	Packing code (Green)
SR30xxPT	TO-3P	30 / TUBE	C0	C0G

Note: "xx" is Device Code from "20" thru "150".

Dimensions

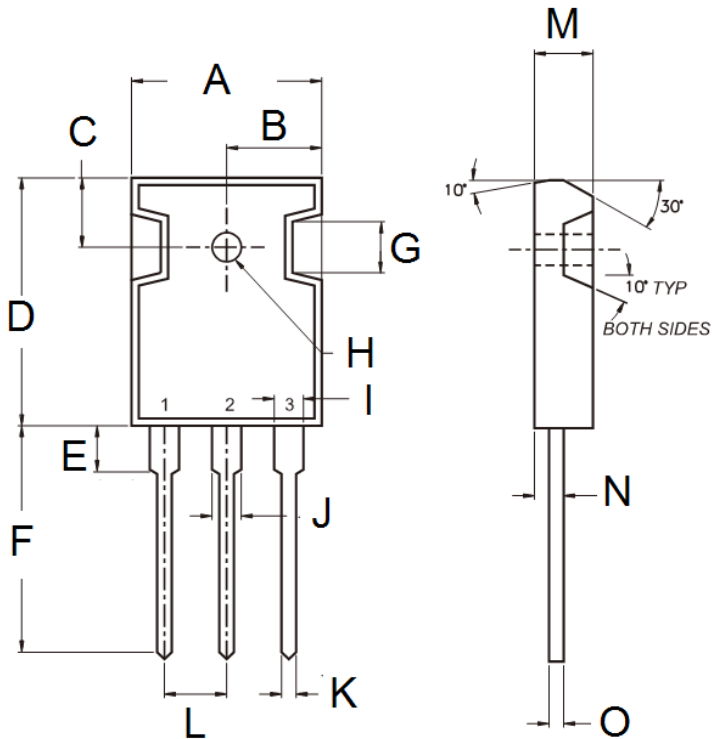

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	15.90	16.40	0.626	0.646
B	7.90	8.20	0.311	0.323
C	5.70	6.20	0.224	0.244
D	20.80	21.30	0.819	0.839
E	3.50	4.10	0.138	0.161
F	19.70	20.20	0.776	0.795
G	-	4.30	-	0.169
H	2.90	3.40	0.114	0.134
I	1.93	2.18	0.076	0.086
J	2.97	3.22	0.117	0.127
K	1.12	1.22	0.044	0.048
L	5.20	5.70	0.205	0.224
M	4.90	5.16	0.193	0.203
N	2.70	3.00	0.106	0.118
O	0.51	0.76	0.020	0.030

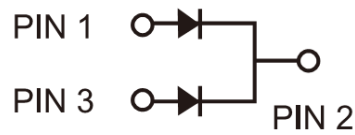

Marking Diagram



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code